



DIGITAL EDITION




ARRL The National Association for
Amateur Radio®

April 2024

www.arrl.org

DEVOTED ENTIRELY TO AMATEUR RADIO

Ham Radio at the Top of the World

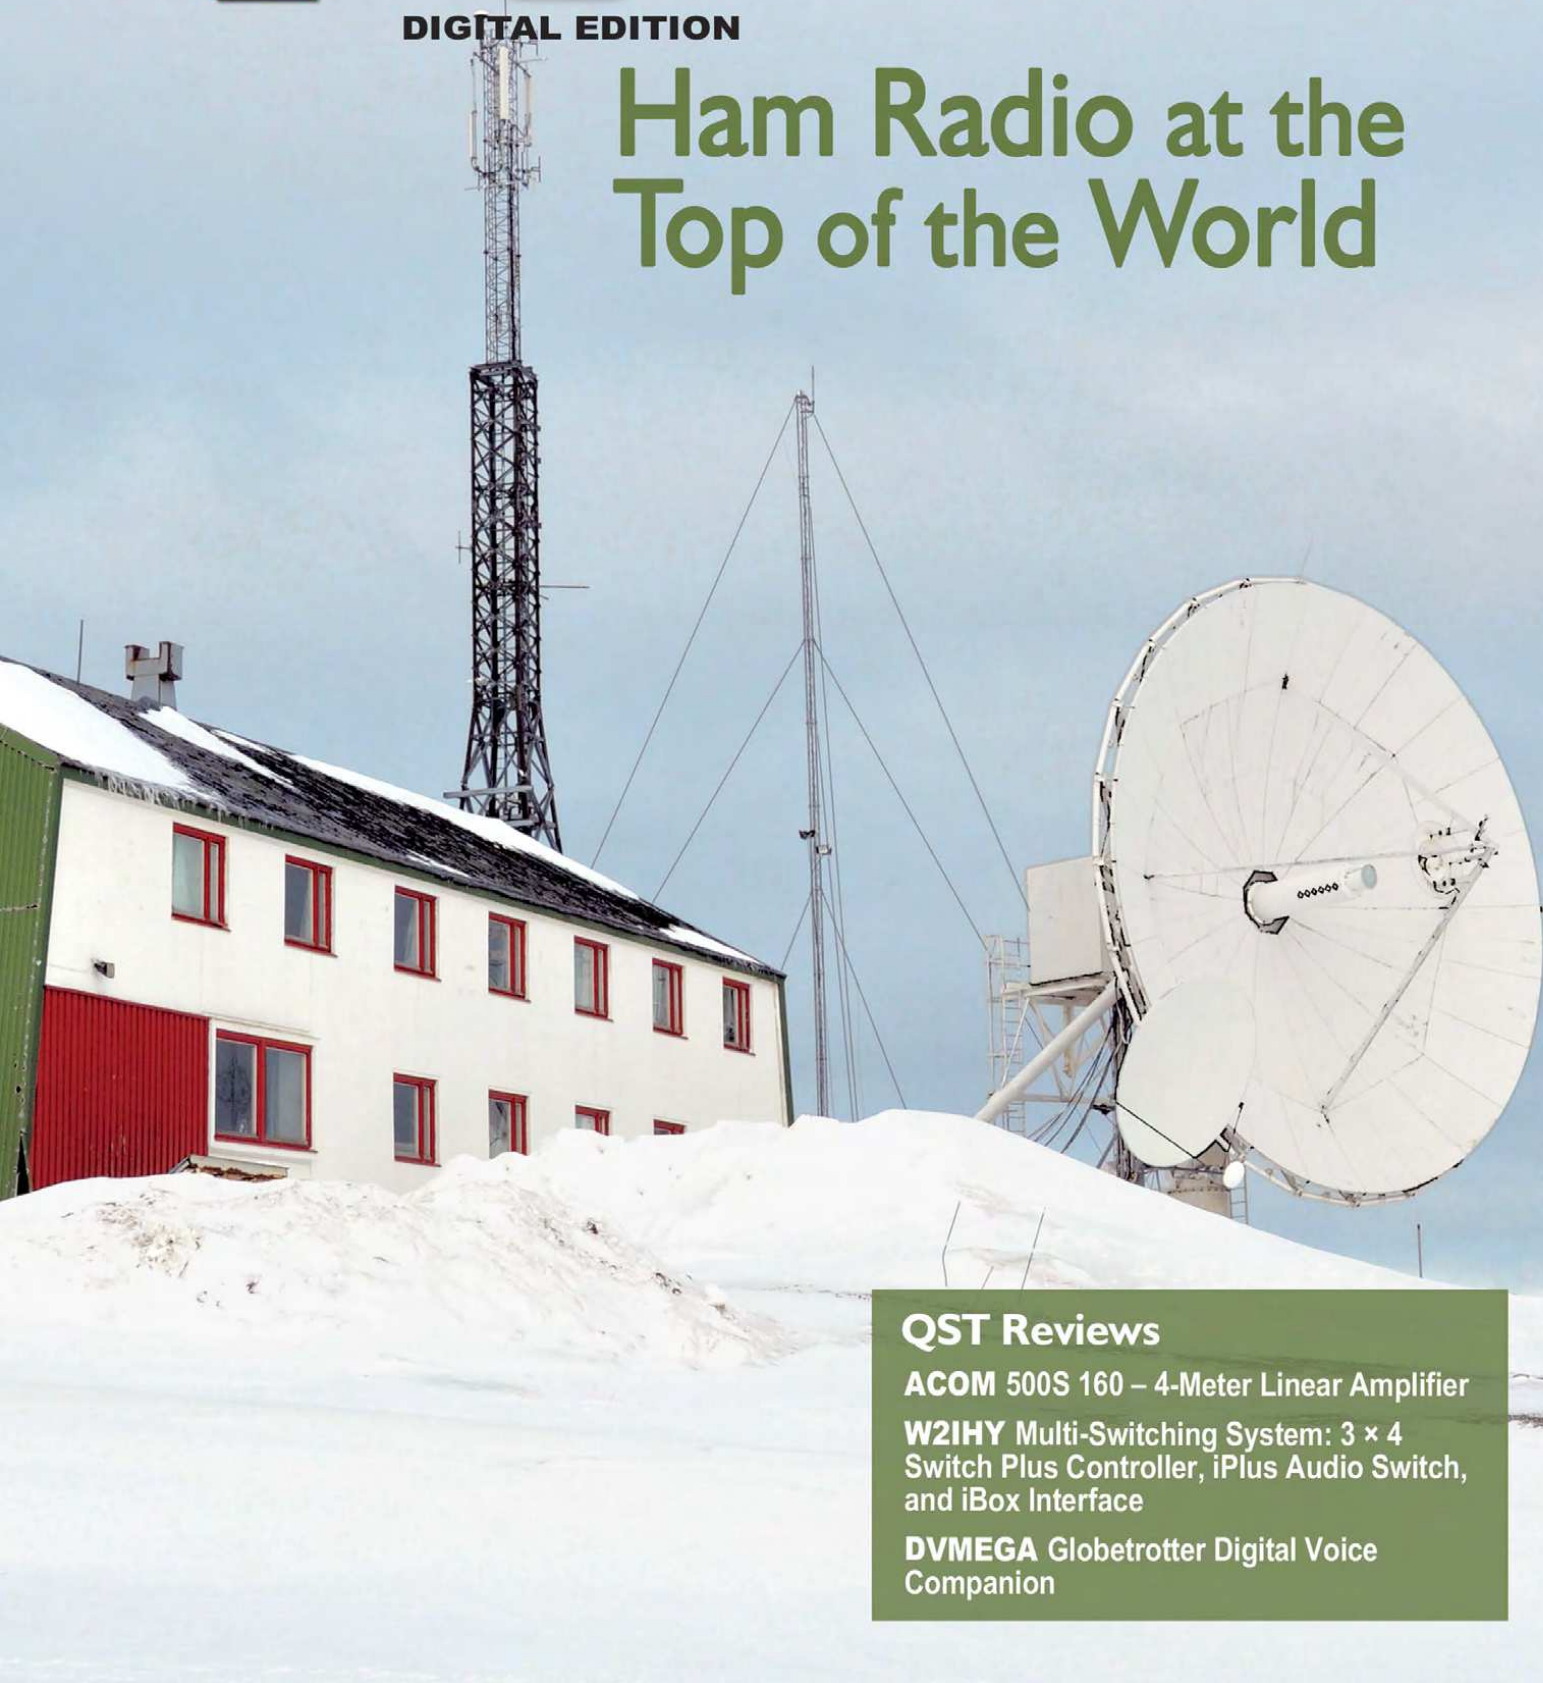

QST Reviews

ACOM 500S 160 – 4-Meter Linear Amplifier


W2IHY Multi-Switching System: 3 × 4
Switch Plus Controller, iPlus Audio Switch,
and iBox Interface

DVMEGA Globetrotter Digital Voice
Companion


FT_{DX}101 TECHNICAL HIGHLIGHT

True Performance Hybrid SDR Configuration

The Hybrid SDR Configuration combines the excellent performance of a Narrow Band SDR receiver with the wide band sampling of a Direct Sampling SDR receiver that simultaneously provides a wide bandwidth real time display of band activity

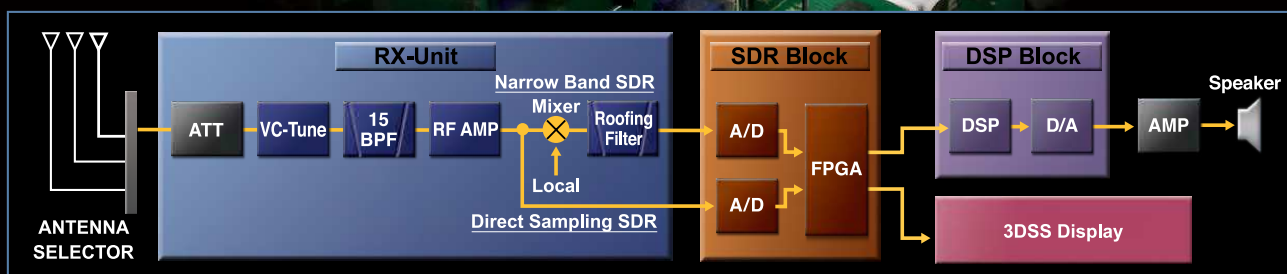


2kHz RMDR 123dB+

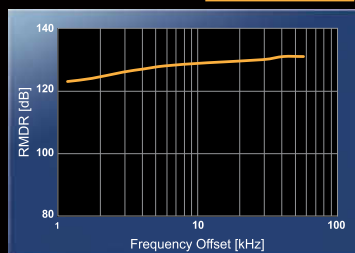


14MHz Band Reciprocal Mixing Dynamic Range (RMDR)

2kHz BDR 150dB+

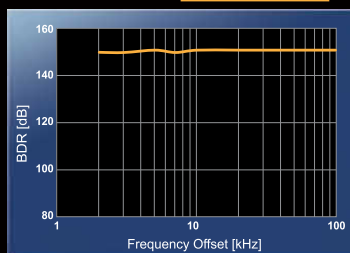

14MHz Band Blocking Dynamic Range (BDR)

2kHz 3rd IMDR 110dB+

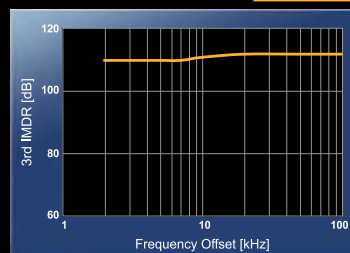

3rd IM Dynamic Range (IMDR)

HF/50MHz TRANSCEIVER

FT_{DX}101MP 200W

HF/50MHz TRANSCEIVER

FT_{DX}101D 100W



* Microphone M-1: Optional

YAESU
Radio for Professionals

YAESU USA
6125 Phyllis Drive, Cypress,
CA 90630 (714) 827-7600

For the latest Yaesu news, visit us on the Internet: <http://www.yaesu.com>

Specifications subject to change without notice. Some accessories and/or options may be standard in certain areas. Frequency coverage may differ in some countries. Check with your local Yaesu Dealer for specific details.

FT_Dx101 TECHNICAL HIGHLIGHT


3DSS (3-Dimensional Spectrum Stream)

Displays the constantly changing band conditions in 3D

Instantly observe changes in the strength of the signals

- Display up to 25 seconds of previous band conditions in real time
- Simultaneously view output from both Narrow band SDR and Direct Sampling SDR on the display
- Versatile scope and multi-color SDR display configuration enables clear and easy viewed presentation provided by 7" TFT Color touch panel display

3DSS
3D Spectrum Stream

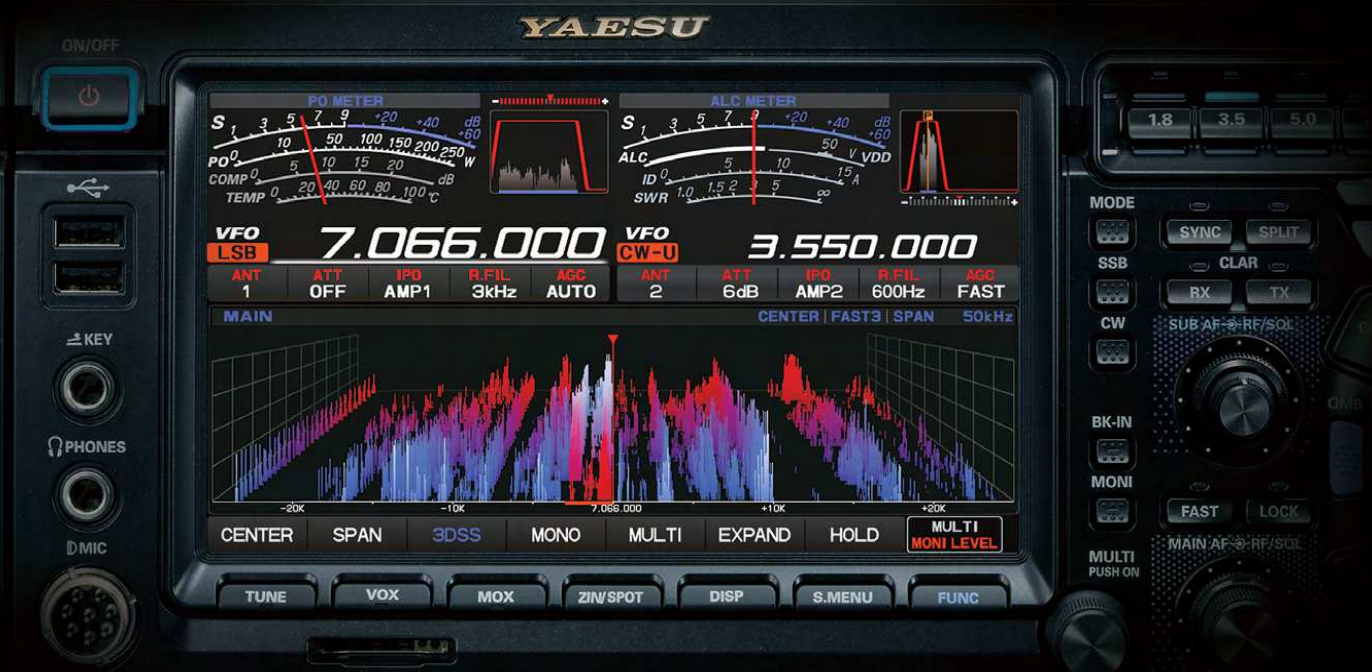

HF/50MHz TRANSCEIVER

FT_Dx101MP 200W

HF/50MHz TRANSCEIVER

FT_Dx101D 100W



* Microphone M-1: Optional

YAESU
Radio for Professionals

YAESU USA
6125 Phyllis Drive, Cypress,
CA 90630 (714) 827-7600

For the latest Yaesu news, visit us on the Internet: <http://www.yaesu.com>

Specifications subject to change without notice. Some accessories and/or options may be standard in certain areas. Frequency coverage may differ in some countries. Check with your local Yaesu Dealer for specific details.

New!

Cushcraft HV-4E

**Cushcraft
HV-4E
\$219⁹⁵**

*Call your
dealer
for your
best price!*

40/20/15/10 Meter Low Profile Vertical Antenna

1200 Watts SSB, 500W CW, 500W Digital on 40 Meters!

Cushcraft HV-4E 40/20/15/10 Meter low-profile Vertical Antenna spans continents and oceans while hiding from sight in your back yard.

Handles 1200 Watts SSB, 500 Watts CW, 500 Watts digital on 40 Meters -- run with the big dogs!!

- **Low angle** radiation focuses RF energy on the horizon for optimum DX coverage
- **High-angle** overhead null rejects noise and local interference
- **Automatic band-switching** uses high-tech parallel end resonators instead of lossy series traps
- **High-Q** top-loading resonators delivers less loss, higher gain on 20/15/10 Meters
- **Center loading** on 40 Meters improves efficiency and lowers center of gravity making HV-4E easier to handle and increases strong wind survivability
- **Individual resonators** are simple to tune for lowest-SWR with to-the-kHz accuracy on every band. No unwanted interactions or compromises!
- **Aluminum**, stainless steel, and fiberglass construction ensure years of reliable service
- **Weights** just 5 pounds and is 19 feet tall. Built in water resistant SO-239 for radio -- no pigtail needed
- **Small footprint**, low center of gravity and lightweight lets you easily install it by yourself almost anywhere. Low profile blends in with natural surroundings

**Compare price and
compare performance.**

*The bands are currently teaming with
DX from around the world, and
the HV-4E is uniquely designed
to put you in the hunt!*

HV-4E-RK, \$49.95. Eight 25 foot Radials(two sets of 4-Radials), each set with solder lug, (200 feet of weather resistance insulated wire).



HV-4E-TB, \$29.95. Sturdy Tilt Base lets you lower antenna to convenient height for easy tuning and maintenance.



Cushcraft HV-4E VS Hustler 4-BTV

Enhanced 40 Meter Performance: Extra-long center loaded radiator improves efficiency	Reduced 40 M Performance: 40M power goes through multiple power wasting series traps
Highly efficient end/center loading: Reduces loss for more power out	Lossy Traps: Power lost in traps
Parallel resonators: Let's you independently tune each band with little or no interaction. Makes tuning easy	Series resonators: Tuning a band interacts with other bands -- may require repeated back and forth adjustments
Parallel resonators: If one resonator fails only that band is impacted	Series resonators: If a single trap fails, multiple bands could be wiped out
Included simple instructions make installation and optimum tune up easy	A "special instruction package" is recommended for teaching users how to retune 4-BTV traps and optimize performance
Low center of gravity: Makes it easy to handle/install and gives better wind survivability	High center of gravity makes it hard to handle
Built-in SO-239 coax connector provides convenient water resistance connection	Requires coax pigtail at extra cost that invites water incursion
Low suggested retail cost \$219.95 and free direct MFJ shipping	STREET price Ranges from \$229.95 to \$295.95 plus shipping


Call your dealer for your best price!
www.cushcraftamateur.com

Cushcraft
Amateur Radio Antennas

308 Industrial Park Road, Starkville, MS 39759 USA
Open: 8-4:30 CST, Mon.-Fri.

Call: 662-323-5803 • mjfcustserv@mjenterprises.com
Prices/specifications subject to change without notice/obligation. © Cushcraft®, 2024.

Cushcraft . . . Amateur Radio Antennas . . . www.cushcraftamateur.com

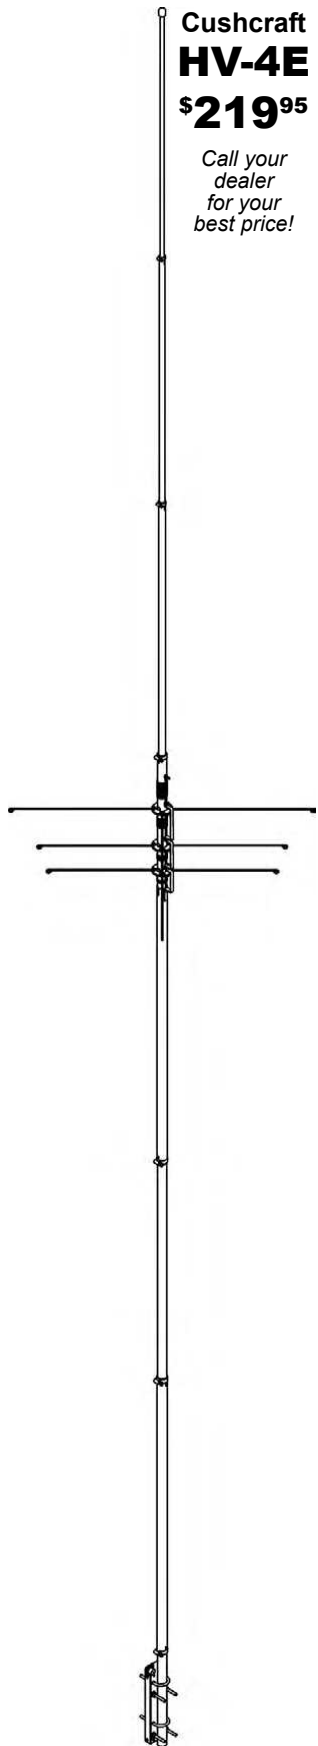

Comet's primary tool for any antenna adjustment or diagnostic project...

CAA-500MarkII Antenna Analyzer

1.8-500MHz


The CAA-500MarkII combines the simplicity and accuracy of an analog instrument, PLUS...a full color LCD graphic display Resistive (R) and Reactive (X) components of impedance graphed and displayed numerically SWR readings in both graphic and numerical results.

Functions:

In addition to the display of antenna properties, SWR curves are plotted quickly, easily and accurately!

Auto band-sweep function:

Switch to the amateur band of choice and press "Sweep Center". The chosen band is swept and the SWR graphed in seconds!



Manual band-sweep function:

Select the band, select the center frequency, and select the bandwidth. Manually sweep the chosen frequency range and display the SWR graph.



Multiple Manual Band-Sweeps

Manually graph the user defined bandwidth multiple times and see the results overlaid in 5 selectable colors! Make antenna length, position, height above ground, gamma match adjustments, etc...and graph each adjustment in seconds, in a new color, without losing the previous graph!

Features:

Operates on 8-16VDC external power, 6 AAA alkaline or NiMH rechargeable cells • Trickle charger built in (only when using NiMH batteries) • Typical battery life: 9 hours of continuous operation • Battery level indicator • Selectable auto power-off time limit preserves battery capacity • SO-239 connector for 1.8-300MHz range • N-female connector for 300-500MHz range • Optional soft carry case sold separately: CAA-5SC

The perfect combination of analog and graphic information, designed in particular for antenna diagnostics and adjustments while on the roof, tower or in the field!

Call or visit your local dealer today!
www.natcommgroup.com | 800-962-2611



David A. Minster, NA2AA
Publisher

Becky R. Schoenfeld, W1BXY
Editorial Director

Dana Kasowitz, KC1SEB
Managing Editor

Leanna Figlewski, KC1RMP
Editor

Amanda Fahy
Sam Shaner
Assistant Editors

Paul Bourque, N1SFE
Contest Program Manager

Phil Salas, AD5X
Kai Siwiak, KE4PT
John Stanley, K4ERO
Technical Editors

Dave Casler, KE0OG
Steve Ford, WB8IMY
Jon Jones, N0JK
Bernie McClenny, W3UR
Rick Palm, K1CE
Barry Shackelford, W6YE
Pascal Villeneuve, VA2PV
Paul Wade, W1GHZ
Contributing Editors

Jodi Morin, KA1JPA
Assistant Production Supervisor

Maty Weinberg, KB1EIB
Production Coordinator

David Pingree, N1NAS
Senior Technical Illustrator

Janet Rocco, W1JLR
Advertising Sales Manager

Bob Inderbitzen, NQ1R
Director of Marketing & Innovation

Steve Ewald, WV1X
Field Organization Supervisor

9 Second Century

The Road Ahead



30 Using the tinySA Ultra Spectrum Analyzer to Solve Amateur Radio and OTA TV Problems

Phil Salas, AD5X



35 A Modest 20- to 10-Meter LPDA

Randy Rhea, N4HI

39 Product Review

Pascal Villeneuve, VA2PV

ACOM 500S 160 – 4-Meter Linear Amplifier; W2IHY Multi-Switching System: 3 × 4 Switch Plus Controller, iPlus Audio Switch, and iBox Interface; DVMEGA Globetrotter Digital Voice Companion



55 Introducing the ARRL Amateur Radio Innovation Award



56 JW0X/JW100QO: An Unforgettable DXpedition in the Arctic

Max Van Rymenant, ON5UR



60 CQ CQ CQ: A Ham Radio Crossword Puzzle

Colin Phoon, AE3A

61 April 2024 Frequency Measuring Test

62 Arizona Hams Hit Their Local Parks

Gary Laatsch, KI7PBR

65 Get On the Air April 8 for the Solar Eclipse QSO Party

McKenzie Denton, KO4GLN

67 ARRL Board Holds 2024 Annual Meeting

77 2024 Straight Key Night Results

Paul Bourque, N1SFE

78 2023 September VHF Contest Results

Ralph “Gator” Bowen, N5RZ

80 Volunteers On the Air Year in Review

Bart Jahnke, W9JJ

95 A Look Back — May 1974



An icon next to an article means there's bonus content in the digital edition at www.arrl.org/qst.

Columns

Amateur Radio World.....	73
Ask Dave	51
Celebrating Our Legacy	101
Classic Radio	102
Club Station.....	82
Contest Corral	76
Correspondence.....	24
Ham Media Playlist	84
Happenings	70
How's DX?.....	86
Member Spotlight.....	13
Microwavelengths	53
Public Service.....	74
The World Above 50 MHz.....	88
Up Front	20
100, 50, and 25 Years Ago	104

Digital and Mobile Editions

ARRL members can access the digital edition via a link at www.arrl.org/qst, download our iOS app from the iTunes Store, and download our Android app from the Google Play Store.

Departments

Amateur Radio Band Chart.....	69
ARRL Section Managers.....	16
ARRL Special Service Clubs.....	83
Certificate of Code Proficiency Recipients..	100
Convention and Hamfest Calendar.....	90
Feedback.....	85, 93
Field Organization Reports	94
Guide to ARRL Member Benefits.....	14
Ham Ads.....	124
Index of Advertisers	126, 127
Officers, Division Directors, and Staff	15
QST Cover Plaque Award.....	64
Silent Keys	105
Special Event Stations	92
Strays	87
This Month in QEX.....	93
Volunteer Monitor Program Report.....	94
W1AW Qualifying Runs.....	100
W1AW Schedule	28

Write for QST

www.arrl.org/qst-author-guide
email: qst@arrl.org



Our Cover

The 2022 JW0X/JW100QO DXpedition started in Svalbard, an archipelago in the Arctic Ocean, where a team of 15 hams made thousands of contacts. After 4 days, a subset of the team embarked on a 6-hour trip by snowmobile from Longyearbyen to Kapp Linné, the site of Isfjord Radio, a radio and weather station. From this location, the team made the first-ever contact from Svalbard via the QO-100 satellite. For all the details on this adventure, read "JW0X/JW100QO: An Unforgettable DXpedition in the Arctic." [Max Van Rymenant, ON5UR, photo]



QST (ISSN 0033-4812) is published monthly as the official journal of the American Radio Relay League, Inc., 225 Main St., Newington, CT 06111-1400, USA. Volume 108, Number 4. Periodicals postage paid at Hartford, CT, USA and at additional mailing offices.

POSTMASTER: Send address changes to: QST, 225 Main St., Newington, CT 06111-1400, USA. Canada Post: Publications Mail Agreement #90-0901437. Canada returns to be sent to The Mail Group, 1501 Morse Ave., Elk Grove Village, IL 60007.

ARRL Membership and QST cannot be separated. All ARRL members have digital, online access to QST. Print subscriptions are available and sold separately. For ARRL members in the US, a subscription to QST via mail is \$25 per year. For libraries and institutions, a subscription to QST is available for \$84 per year; single copies \$7.

ARRL Membership is available to individuals at \$59 per year. A reduced rate is available for licensed radio amateurs under 26 years old, for \$30 per year. Membership is available to the immediate family of a member living at the same address, and to anyone who is legally blind, for \$12 per year. A complete list of dues rates is available at www.arrl.org/join. Foreign remittances should be by international postal or express money order or bank draft negotiable in the US and for an equivalent amount in US funds.

Copyright © 2024 by the American Radio Relay League, Inc. Title registered at the US Patent Office. International copyright secured. All rights reserved. Quedan reservados todos los derechos. Printed in the USA.

QST®, DXCC®, VUCC®, DX Century Club®, ARES®, Amateur Radio Emergency Service®, Logbook of The World®, LoTW®, and ARRL The National Association for Amateur Radio® are registered trademarks of the American Radio Relay League, Inc.

ARRL and QST in no way warrant the products described or reviewed herein.

QST is available to blind and physically handicapped individuals from the Library of Congress, National Library Service for the Blind and Physically Handicapped. Call 1-800-424-8567 or go to www.loc.gov/nls/.

Indexed by Applied Science and Technology Index, Library of Congress Catalog Card No: 21-9421.

To ensure prompt delivery, we ask that you periodically check the address information on your mailing label. If you find any inaccuracies, please contact Member Services at circulation@arrl.org or 860-594-0200.

Reprints and permissions:
permission@arrl.org

Online Privacy Policy:
www.arrl.org/online-privacy-policy

Telephone: 860-594-0200

Fax: 860-594-0259



DAYTON 2024 HAMVENTION®

Expanding Our Community



Greene County Fairgrounds & Expo Center
Xenia, Ohio

Get Your Tickets Online NOW!

\$26 in advance or \$30 at the gate

May 17 - 19, 2024

- Exhibits & Flea Market
- Forums & Activities
- Networking & More!

hamvention.org

Meet us at Hamvention® for the 2024 ARRL National Convention



Program Highlights

- Special Exhibits and Guests
- Presentations and Forums
- ARRL Program Representatives
- ARRL Store. Get 2024 ARRL Field Day gear!



2024 ARRL Youth Rally at Hamvention®

Saturday, May 18

Hands-on ham radio activities, discovery, sharing, and fun!
Advance online registration required (ages 11 – 21; includes t-shirt, lanyard, and badge)

Hamvention will provide admission tickets at no cost for these ARRL pre-registered Youth Rally attendees.

Register for the Youth Rally
at www.arrl.org/expo



ARRL
events


Download the ARRL Events app to find booths, exhibits, forums, maps, hourly prize drawings, and more!

Get the full **2024 ARRL National Convention Program** at www.arrl.org/expo

LISTEN FOR THE LOUDEST STATIONS

ODDS ARE GOOD THEY
WILL BE USING A
SteppIR!

There is no substitute for being able to optimize an antenna to the exact length required for each individual element. SteppIR's patented technology features mechanically tuned, frequency optimized Yagi and Vertical antennas that give the user a huge performance increase over fixed length antennas.

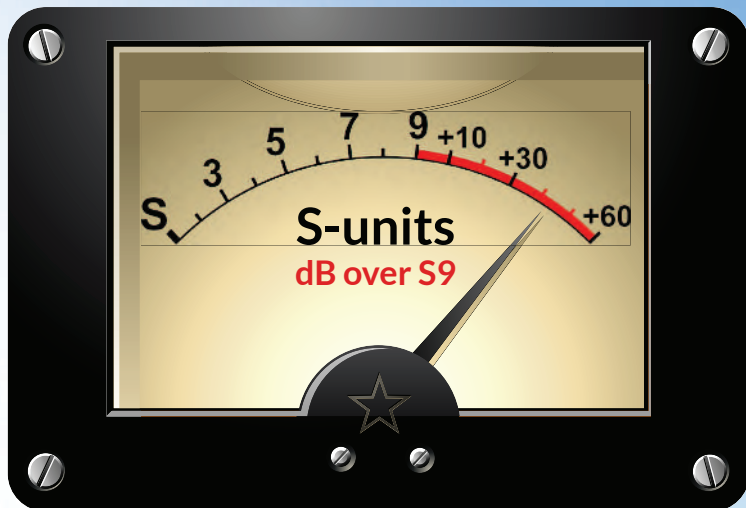

For more information about our
significant product advantages:

www.59PLUS20.com



FOR PRODUCT DETAILS AND ORDERING:
www.steppir.com 425-453-1910



DIAMOND ANTENNA

diamondantenna.net

When it comes to quality and performance, DIAMOND ANTENNA is the worldwide leader in VHF/UHF base and mobile antennas.

DIAMOND ANTENNAS help you get the most out of your on-air experience.

For all your base station and repeater needs, DIAMOND has an antenna that will work for you.

You've tried the rest, now own the best!

Here is a small sample of our wide variety of antennas

Model	Bands	Length Ft.	Max Pwr. Rating	Conn.
Dualband Base Station/Repeater Antennas				
X700HNA (4 section)	2m/70cm	24	200	N
X510HD (3 Section)	2m/70cm	17.2	330/250	UHF or N
X300A (2 Section)	2m/70cm	10	200	UHF or N
X200A (2 Section)	2m/70cm	8.3	200	UHF
X50A (1 Section)	2m/70cm	5.6	200	UHF or N
X30A (1 Section)	2m/70cm	4.5	150	UHF
Monoband Base Station/Repeater Antennas				
F23H (3 Section)	144-174 MHz (W/ Cut Chart)	15	350	UHF
F22A (2 Section)	2m	10.5	200	UHF
GP22E (Aluminum)	2m	8.9	200	UHF
F718A (Coax Element)	70cm	15	250	N
Dualband Mobile Antennas				
SG7900A	2m/70cm	62.2 in.	150	UHF or NMO
SG7500A	2m/70cm	40.6 in.	150	UHF or NMO
NR770H Series	2m/70cm	38.2 in.	200	UHF or NMO
MR77 Series	2m/70cm	20 in.	70	Mag Combo
AZ504FXH	2m/70cm	15.5 in.	50	UHF
AZ504SP	2m/70cm	15.5 in.	50	UHF
NR7900A	2m/70cm	57 in.	300/250	UHF
Monoband Mobile Antennas				
NR22L	2m	96.8 in.	100	UHF
M285	2m	52.4 in.	200	UHF or NMO

X700HNA Special Features:

- Heavy duty fiberglass radomes
- Four section assembly
- Overlapping outer shells for added strength
- Stainless steel mounting hardware & radials
- Strong waterproof joint couplings
- Type-N cable connection
- Wideband performance
- Highest gain Dual-band Base Antenna!



NR770H Series



SG7900A



X30A / X50A



X700HNA

The Standard By Which All Others Are Judged



RF PARTS™
COMPANY

Diamond Antenna is a division of RF Parts Company



Second Century

The Road Ahead

In 1995, Bill Gates released The Road Ahead, which was, at the time, a very important book on the future of computing. He was doing revolutionary things at Microsoft, from the work going into their Encarta series of digital encyclopedia products, to his own home where he was experimenting with digital art as you moved from room to room, causing him to purchase the digital rights to great works of art. In that same book, he said that he saw no commercial value to the internet being realized for another decade. Wow, did he get that wrong!

Not long after that, as hams migrated from Commodore 64-based computing to PC clones, dial-up internet gave way to cable modems and high-speed access. The claim that the internet would be the death of amateur radio soon followed. Again, how wrong that prediction turned out to be. Early hits included ARRL's Logbook of The World, which made QSLing fast and free, and websites like eHam and QRZ, which continue to be popular. These simple databases were joined by real-time data tools such as the Reverse Beacon Network, PSK Reporter, and WSPRnet. Collectively, with hundreds of billions of records of stations heard and reported live, these tools make amateur radio more fun for award and DXpedition chasers, and provide higher scores, especially for casual contesters looking to work new multipliers.

Are we at the tipping point of a new revolution in amateur radio? I believe the answer is yes — and the next wave of tech will be in the artificial intelligence, or AI, space. There's likely going to be development coming that may cause you to say AI is the death of amateur radio!

It's important to understand what AI is about in order to begin to guess how it might impact amateur radio. For us, there are two critical elements: data mining and machine learning. For AI to become efficient and extensive, it requires access to massive amounts of information. And unlike a program on your computer, AI is a process that is constantly running and learning. So ultimately the best programming and access to the best data will win. How can access to massive amounts of data, smart programming, and integration into our daily use of amateur radio products and services change the way we operate? Let's look at two examples.

If you've ever made a serious effort in a 48-hour international contest, you know that part of the fun is in the complexities of the game. The extra work you put into planning which bands you'll be on, understanding propagation ahead of and during the contest, and real-time reporting tools like spotting networks and the Reverse Beacon Network all mean there are many moving parts to manage. By day 2, you're getting tired — and your reliance on tech can help you get over the finish line.

Imagine this: Your SDR is not only receiving a single signal for you to make contact with, but it is listening to the entire band, as well as processing all of the spots. As you work stations, they disappear from the SDR. Not just showing as a

duplicate, but disappearing from the band! If you go up and down the bands, you'll hear only stations you need to work, and you'll see only their signals in your display. Now imagine this presented in color: AI knows that a given station (presented in one color), when it is on the air, rarely puts in much of a time effort, and that what looks like a rare station (presented in another color) will be there all weekend. Or perhaps there is a narrow window of propagation, calculated in real time, where a new multiplier may be on for only a matter of minutes. AI will be using real-time and historical data not just to display a list of what you need to work and a scrolling VFO window to show who is where based on spots, but to give you real-time customized information so you can target the highest possible score. Now AI becomes a competitive tool that can add to the scores of even the largest stations.

Another example has to do with filtering. Imagine going beyond the **NB** and **NR** buttons on your rig to a button labeled **AIF**: Artificial Intelligent Filtering. The software in the rig would use data stored in the cloud to access patterns of CW signals and even voice to dynamically peel away the QRM and QRN to make signals vastly more readable. As we've marveled at what static algorithmic filtering can do to make signals readable, this would go to a much higher level, taking into account your own noise challenges along with the nuances of the specific station you are listening to.

AI represents a bold future for amateur radio. It offers us the ability to use the vast quantities of data we have access to today, and foretells of the data needs of the future for hams to innovate with what AI can do within radios and within the shack. It is a very different way of thinking about amateur radio, and will challenge us even more than how we view FT8 and FT4's role in the hobby today.

So be radio active! Think about how you might use the emerging AI tools in your shack. Be a connector by getting involved with the teams progressing this revolution. And feel good about the role we are playing in fulfilling FCC Part 97.1(b): *Continuation and extension of the amateur's proven ability to contribute to the advancement of the radio art.*

David A. Minster, NA2AA
Chief Executive Officer

hy-gain HF Vertical Antennas

Work amazing DX with these extremely low radiation angle omnidirectional antennas. All self supporting, 1500 Watts PEP SSB, low SWR. Heavy duty, slotted, tapered, swaged, aircraft quality aluminum tubing. Stainless steel hardware. Two year limited warranty.

AV-680, \$769.95. 9 Bands: (6, 10, 12, 15, 17, 20, 30, 40, 80 Meters). 26 ft., 18.5 lbs. Our most popular vertical now has 75/80 Meters! Lets you work exciting DX with a low 17 degree radiation angle! Easily mount on decks, roofs, patios. No ground or radials needed. Extra wide 2:1 SWR bandwidths. Each band tunable. Auto band-switching, handle 1.5kW, 80 MPH wind survival, low 2.5 sq. ft. wind surface. Aircraft aluminum tubing, stainless steel hardware.

AV-640, \$659.95. Like AV-680 less 80M. 25'1/2', 17'1/2 lbs.

AV-620, \$599.95. Like AV-640 less 40M. 22'1/2'/10'1/2 lbs.

AV-14AVQ, \$299.95. (10, 15, 20, 40 Meters). 18 ft., 9 lbs. Classic AV-14AVQ uses same trap design as famous Hy-Gain Thunderbird beams. 3 air dielectric Hi-Q traps with oversize coils give superb stability and 1/4 wave resonance on all bands. Automatic bandswitching.

AV-12AVQ, \$219.95. (10, 15, 20 Meters). 13 ft., 9 lbs. Lowest priced automatic bandswitching tri-band vertical! Uses Thunderbird beam design air dielectric traps for extremely hi-Q performance in limited space.

AV-18VS, \$159.95. (10,12,15,17,20,30,40,80M). 18 ft., 4 lbs. hy-gain's lowest priced vertical gives you 8 bands. Easily tuned to any band by adjusting base loading coil.

See our website for even more hy-gain vertical antennas!

hy-gain HF Beam Antennas

Hy-gain beams are stronger, light-er, have less wind surface and last years longer. Why? Hy-gain uses durable tooled components -- massive boom-to-mast bracket, heavy gauge element-to-boom clamps, thick-wall swaged tubing -- no failures!

TH-11DX, \$1799.95.

11-element, 4.0 kW PEP, 10,12,15,17,20 Meters. The choice of top DXers. With 11-elements, excellent gain and 5-bands, the super rugged TH-11DX is the "Big Daddy" of all HF beams! Features low loss log-periodic driven array on all bands with mono-band reflectors, BN-4000 high power balun, corrosion resistant wire boom support, hot dipped galvanized and stainless steel parts.

TH-7DX, \$1599.95. 7-Element, 1.5 kW PEP, 10, 15, 20 Meters. 7-Elements gives you the highest average gain of any Hy-gain tri-bander! Dual driven for broadband operation without compromising gain. SWR less than 2:1 on all bands. Combined monoband and trapped parasitic elements give you an excellent F/B ratio.

TH-3MK4, \$869.95. 3-Element, 1.5 kW PEP, 10, 15, 20 Meters. Gives most gain for your money in full-power, full-size hy-gain tri-bander! Impressive gain and a whopping average front-to-back ratio and still fits on an average size lot. 95 MPH wind survival.

TH-3JRS, \$539.95. Compact 3-Element, 600 W PEP, 10, 15, 20 Meters. Hy-gain's most popular and lowest-priced tri-bander fits smallest lot, 14.75 ft turning radius, 21 lbs. Excellent gain and front-to-back let you compete with the "big guns"! 80 MPH wind survival.

hy-gain Rotators . . . the first choice of hams around the world!

HAM-IV . . . \$799.95

The most popular rotator in the world! For medium communications arrays up to 15 sq. feet wind load area. 5-second brake delay! Test/Calibrate function. Low temperature grease permits normal operation down to -30° F. Alloy ring gear gives extra strength up to 100,000 PSI for maximum reliability. Indicator potentiometer. Ferrite beads reduce RF susceptibility. Cinch plug plus 8-pin plug at control box. Dual 98 ball bearing race for load bearing strength and electric locking steel wedge brake prevents wind induced antenna movement. North or South center of rotation scale on meter, low voltage control, max mast size of 2'1/16".

HAM-VI, \$999.95. For medium arrays up to 15 sq. ft. wind load. Like HAM-IV but has new DCU-2 Digital Rotator Controller. Just dial in your beam heading or let your computer control your antenna.


HAM-VII, \$1099.95. Like HAM VI but with DCU-3 digital controller with six programmable memories.

Digital Rotator Controller with 6 programmable Beam Headings

DCU-3 Digital Controller lets you program 6 beam headings! Gives fully automatic or manual control of hy-gain HAM or Tailtwister Rotators.

Push a memory button or dial in your beam heading or let Ham Radio Deluxe (or other program) control your DCU-3. Antenna automatically rotates precisely, safely to desired direction.

DCU-2, \$519.95. Like DCU-3 but less beam headings.



DCU-3
\$639.95

Tailtwister T-2X . . . \$1099.95

For large medium antenna arrays up to 20 sq. ft. wind load. Choose **DCU-2** digital controller (T-2XD2) or analog control box (T-2X) with new 5-second brake delay and new Test/Calibrate function. Low temperature grease, alloy ring gear, indicator potentiometer, ferrite beads on potentiometer wires, new weather-proof AMP connectors plus 8-pin plug at control box, triple bearing race with 138 ball bearings for large load bearing strength, electric locking steel wedge brake, N or S center of rotation scale on meter, low voltage control, 2'1/16" max. mast.

T-2XD2, \$1299.95. Tailtwister with DCU-2 digital controller.

T-2XD3, \$1399.95. Tailtwister with DCU-3 digital controller with six programmable memories.

AR-40, \$539.95. For compact antenna arrays and FM/TV up to 3.0 sq. ft. wind load. Dual 12 ball-bearing race. Fully automatic.

CD-45II, \$599.95. For antenna arrays up to 8.5 sq. ft. Bell rotator design gives total weather protection. Dual 58 ball bearing race.



Replace Your Yaesu Rotator Controller

YRC-1
\$459.95




Replace your Yaesu rotator controller. More features and a much more robust controller that is far less prone to lightning damage. YRC-1 costs less than repairing your original Yaesu controller!

hy-gain VHF/UHF Antennas

VB-214FM, \$219.95. 14-element 2-Meter FM beam antenna provides exceptional front-to-back ratio and maximum obtainable gains. **VB-23FM, \$109.95.** 3-element. **VB-25FM, \$129.95.** 5-element.

VB-28FM, \$189.95. 8-element. Threaded stub for feedpoints. Accepts up to 2 inch mast.

DB-2345, \$159.95. Dual band 144 (3-elements) 440 (5-elements) MHz.



hy-gain

Antennas, Rotators & Towers 308 Industrial Park Rd, Starkville, MS 39759 USA

Sales/Tech: (662) 323-9538 • **FAX:** (662) 323-5803 Open 8-4:30 CST, Mon.-Fri.

Add Shipping. Prices and specifications subject to change. (C) 2023 hy-gain

Upgrade Your Antenna, Get The Best Mag Loop Today!



HG1 Deluxe MLA *Portable & Quick Setup*

- 80m to 10m *
- 45W PEP
- LMR600 Radiation Loop
- Calibrated 6:1 Manual Tuning Dial

\$535

HG3 Pro MLA *Remote Control & Auto Tuning*

- 80m to 10m *
- 45W PEP
- LMR600 Radiation Loop
- Integrated SWR Bridge

\$1,335

HG3 QRO-B MLA *Precision Remote Control & Auto Tuning*

- 80m to 10m *
- 1000W PEP
- LMR600 Radiation Loop
- Integrated SWR Bridge

\$3,025

See what our users say
on their Facebook Group
"PrecisionRF HG3 QRO"

CONSIDER THESE BENEFITS IN YOUR NEXT MLA PURCHASE DECISION:

- 1 Stepper Motor Tuning**
Precision in Every Tune: Achieve repeatable and precise tuning with higher resolution. Optimized Signal Quality. Enjoy the lowest SWR for clear communication.
- 2 Microprocessor Control**
Control at Your Fingertips: Experience remote tuning for unparalleled convenience. Set the precise capacitor resonance value. Select bands quickly and seamlessly for spot-on tuning and minimal noise.
- 3 Integrated SWR Bridge**
Optimal Signal Strength: The integrated SWR bridge automatically scans for the lowest SWR, ensuring peak transmitter performance, minimal noise, and greater convenience.
- 4 Ideal for HOA Restrictions**
Setup Anywhere, Anytime: Easily deploy your mag loop in diverse locations. Freedom from elevation constraints, such as wire antennas. Great for HOA restrictions. Sets up easily in the attic.
- 5 QRO High Q Vacuum Capacitor and Loop**
High-Power with Minimal losses for the Best Performance: Vacuum capacitor and higher loop surface area deliver greater efficiency. Wide tuning range provides coverage of all popular HF bands.
- 6 Supported by Knowledgeable Hams**
Trusted Expertise: Choose a brand with a proven track record in the hands of knowledgeable hams. Dedicated Support: We are committed to providing comprehensive assistance and guidance for your mag loop setup.



SOTA-1 MLA \$435

- High-Q Capacitor
- 3:1 Reduction Dial
- 15W PEP
- LMR400 Radiation Loop
- Lightweight Nylon Bag



Bag holds everything
including the tripod

Tested and proven on Mt. Kilimanjaro

Gear up for your next adventure with the SOTA-1 MLA – your perfect companion for SOTA expeditions. Crafted from durable and lightweight materials, making it easy to carry on your hiking adventures.

Key Features:

- Lightweight Design: Ideal for easy transport on your outdoor journeys.
- Quick Deployment: Get up and running swiftly for a seamless SOTA experience.
- QRP Power: 15W PEP for maximum radio performance with minimal gear weight.

Order your SOTA-1 MLA today and elevate your summit conquests with the best SOTA performance yet.

Visit [precisionRF.com](https://www.precisionrf.com) to purchase your next MLA today.

• email: sales@precisionrf.com • phone: 503-915-2490 •
• some features are optional • some limitations may apply • prices subject to change •
PrecisionRF® LLC © 2023 V1.5





Got Noise?!

MFJ has answers

Noise-Cancellers Wipe Out Interference

Null out all types of noise!!!

Severe power line noise from arcing transformers and insulators, fluorescent lamps, dimmers, touch controlled lamps, computers, TV birdies, lightning, garage door openers, electric drills, motors, industrial processes. It's much more effective than a noise blander because interference much stronger than a desired signal can be completely removed without affecting the desired signal. All modes -- SSB, AM, CW, FM, frequencies from BCB to lower VHF.

Null out strong QRM on top of weak rare DX! Null out a strong local ham or AM broadcast station to prevent your

expensive receiver from overloading.

Use as an adjustable phasing network. Combine two antennas to give you a powerful receive station and have a



MFJ-1026
\$259⁹⁵



variety of directional patterns.

MFJ-1026 simply plugs between

your transmitting antenna and your transceiver. To null, you adjust the amplitude and phase potentiometer controls for a minimum S-meter reading or low noise. To peak, push reverse.

Use built-in active or external antenna. **Constant Amplitude Phase Control™** makes nulling super easy -- snag that rare DX you have missed.

RF-sense T/R switch auto bypasses your rig when you transmit. Adjustable T/R delay time. Use 12 VDC or 110 VAC with **MFJ-1312D**, \$19.95. 6½X1½X6¼ inches.

MFJ-1025, \$239.95. Like MFJ-1026, less the built-in active antenna. Use external antenna connection.

MFJ Ultrasonic Receiver with parabolic reflector pinpoints power line noise

HF and VHF operation can be affected by noise, makes it hard to hear weak stations, adds to fatigue. Often, noise comes from power lines. Power companies are willing to help with issues, but don't have equipment or trained personnel to locate it. MFJ aids in finding noise generated by corona discharge and arcing components. Acoustic receiver is tuned to 40 KHz. 18" diameter plastic dish gives a narrow beamwidth to pinpoint noise sources less than 12" at 50 feet. Also listen to nature: bats, birds, and insects!



MFJ-5008
\$219⁹⁵

MFJ Power Line Noise Finder

Walk or drive around with these handheld power line noise meters to search out leaky insulators, loose hardware and corroded ground lines quickly. Track noise right down to the pole, transformer or insulator, or other source. Operates in 135 MHz region where activity is minimum and radiation from corona/arcing is more localized. 0.3 uV sensitivity and wide-range AGC for noise level meter -- over 70 dB!

MFJ-1767, \$99.95. Adds 3-element beam to MFJ-852.

MFJ-856, \$209.95. Combination of MFJ-852 noise finder and MFJ-1767 three-element beam antenna.

MFJ-852
\$159⁹⁵



MFJ Low-Noise Receiving Mag Loop

Clearly hear signals 50 KHz to 30 MHz you never knew existed. Power line noise and static disappears. Rotating the MFJ-1886 eliminates interfering signals or greatly peaks desired signals. Excellent antenna and preamplifier balance gives deep null. Gives excellent strong and weak signal performance without overload. Fully protected state-of-the-art push-pull Gali MMICs preamplifier gives high dynamic range, low IMD and 25 dB of low noise gain. Use inside or outside.



MFJ-1886
\$329⁹⁵

Receive Loop with Biastee

Reduce Harmonics, Avoid TVI with MFJ Low Pass Filters

Suppress TVI, RFI, telephone, other interference by reducing unwanted harmonics to your antenna. Your HF signal still passes through with low loss so you snag that rare DX! *Keep the wife and neighbors happy!*

MFJ-702B, \$54.95. 200W. SWR below 1.5 to 30 MHz.

MFJ-704, \$119.95. 1500W. SWR below 1.3 to 30 MHz.

MFJ-705, \$219.95. 2500W. SWR below 1.3 to 30 MHz.



MFJ-854
\$159⁹⁵



MFJ Clamp-on RF Ammeters

Clamp-On RF Ammeters quickly snap over wires and cables to measure RF currents flowing in antenna elements, radials, ground wires and on outside of coax. Tune counterpoises, radials, ground systems. Study/optimize antennas for peak performance. Find peaks/nulls. MFJ-854 has five calibrated ranges to 3 Amperes, including sensitive 30 mA range. **MFJ-853**, \$79.95. Like MFJ-854, Ranges: 0.3, 1, 3 A. Mini size. **MFJ-853H**, \$89.95. 3/10/30 A ranges. **MFJ-805**, \$129.95. Check RFI on cables up to 1/4" dia. VLF to VHF.



MFJ-1164B
\$134⁹⁵

MFJ AC Line Filter/Protector

Filters and reduces AC power line RFI, hash, noise, transients, surges generated by computers, motors, RF transmitters, static/lightning by 30 db and up to 60-80 dB with ground. Fast, *nano-second* overvoltage protection. Provides inductive isolation, capacitive decoupling, RFI rejection, overvoltage protection of common mode, differential signals. Rejects/shunts undesired signals to ground. 12Wx3½Hx2D".

Ferrite RFI Suppression Chokes

MFJ-700A4, \$19.95. .275" diameter 4-Pack
MFJ-700B4, \$19.95. .402" diameter 4-Pack
MFJ-700C4, \$34.95. .528" diameter 4-Pack
MFJ-700D4, \$39.95. .750" diameter 4-Pack



MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759

Phone: (662) 323-5869 • Tech Help: (662) 323-0549 • FAX: (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. (c) 2024 MFJ Enterprises, Inc.

• 1 Year No Matter What™ warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ



Member Spotlight

Amanda Plexico, KY4GS

Amanda Plexico, KY4GS, discovered amateur radio later in life. Even when she returned home after college to find out her mother earned a ham license and was encouraging her to take the test too, she still wasn't drawn to learning about the hobby. It wasn't until about 10 years later that she surprised her mother by passing all of the written exams in one session. Now, after being a ham for only 3 years, she has become a dedicated mentor in the CW community.

Bitten by the Morse Code Bug

When Amanda first started operating as a licensed ham, she was mostly operating FT8. But after only a few months with her license, she became bored with digital modes and wanted to take on the challenge of learning how to operate CW. She never intended to learn Morse code because it was no longer a license requirement, but after finding out more about the mode, she became curious. "I was drawn to CW because of the opportunity to communicate with distant stations without the need for a superstation, but now it's much more than just chasing DX," she said.

Amanda has even become somewhat of a key collector, sharing, "I appreciate different ways to send Morse code, including various paddles, bugs, and straight keys." She currently owns nine keys and primarily uses a 9A5N solid-state single-paddle key, but she also has a 100-year-old bug that she uses in some straight key events.



Giving Back to the Ham Community

Morse code became such a big part of Amanda's operations that she wanted to start mentoring other hams and help them learn the mode. "I was fortunate to have great elmers who shaped my experiences with their patience and guidance. I hope to share the fun and enjoyment that I get from ham radio by tutoring Morse code," she said. She also shared that mentorship doesn't have to be a formal experience. It can be as simple as saying some encouraging words to another ham who might need help.

Amanda volunteers as an assistant advisor for CWops' CW Academy Intermediate classes, where she participates in interactive Zoom sessions to help students practice sending Morse code, discuss techniques with them, and allow them to address any problems they may be experiencing. She was also a Morse code instructor with the Long Island CW Club for 18 months, and continues to assist with the club's kids class.

Learning the skill of sending CW takes practice, and Amanda's best advice for those trying to learn or improve their skills is to get on the air more. "As I gained more experience in CW mode (and ham radio in general), less effort was required, and the thrill of each QSO became more enjoyable."

Exploring a Multifaceted Hobby

While CW and mentorship are major parts of Amanda's ham radio journey, she also enjoys contesting as well as conversational contacts. When contesting, she doesn't take her scores too seriously. "I try to push myself to operate better than the last time, while having fun and working new stations," she said. But her favorite type of contacts to make involve longer conversations with other operators because it allows her to "meet some really awesome people who live all over the world."

Some of Amanda's other hobbies, such as spending time outdoors and working on home-improvement projects, often merge with amateur radio. POTA allows her to spend time in nature while experimenting with antennas and learning more about ham radio operations. She also often visits hardware stores to put her DIY skills to use with homebrew ham radio projects.

"I'm fortunate that I found [ham radio] in my 40s, with many years left to enjoy it!"

Guide to Member Benefits



ARRL Online | www.arrl.org/myarrl

Create an online ARRL Member account, and get access to members-only benefits. Register at www.arrl.org/myARRL. Already registered? Log in at the top of the ARRL website.

ARRL Magazines | www.arrl.org/magazines



Members can access the digital editions of four ARRL magazines from a web browser and the free ARRL Magazines app available from Apple's App Store, Google Play, and Amazon Kindle. Members need a valid ARRL account to access the digital magazines, Periodicals Archive and Search, and the Product Review Archive. Print subscriptions are available and sold separately.

QST – ARRL's monthly membership journal
On the Air – for new and beginner-to-intermediate-level radio amateurs
QEX – A Forum for Communications Experimenters
NCJ – the National Contest Journal

E-Newsletters | www.arrl.org/opt-in-out

Subscribe to the weekly ARRL Letter, the monthly ARRL Current, and a variety of other e-newsletters and announcements for members. Keep up with ARRL News, publications, podcasts, and calendars.

Email Forwarding Service

Email sent to your arrl.net address will be forwarded to any email account you specify.

ARRL Learning Center | learn.arrl.org

This online learning environment is designed to help members get the most out of amateur radio. Courses, tutorials, and resources cover getting on the air, emergency communications, and electronics and technology.

Technical Information Service | www.arrl.org/tis

Call or email our expert ARRL Lab specialists for answers to all of your technical and operating questions.

Join or Renew

www.arrl.org/join

Donate

www.arrl.org/donate

Benefits

www.arrl.org/benefits

Shop

www.arrl.org/shop

Advocacy | www.arrl.org/regulatory-advocacy

ARRL supports legislation and regulatory measures that preserve and protect meaningful access to the radio spectrum. Our **ARRL Regulatory Information Branch** answers member questions concerning FCC rules and operating practices.

Logbook of The World – LoTW | www.arrl.org/lotw

Record your contacts and qualify for awards using ARRL's premier logging service.

Group Benefits* | www.arrl.org/benefits

ARRL Ham Radio Equipment Insurance Plan *US only

Find...

...a License Exam Session | www.arrl.org/exam
...a Licensing Class | www.arrl.org/class
...a Radio Club (ARRL-affiliated) | www.arrl.org/clubs
...a Hamfest or Convention | www.arrl.org/hamfests

Interested in Becoming a Ham?

www.arrl.org/newham

newham@arrl.org | Tel. 1-800-326-3942 (US)

Connect with ARRL

ARRL The National Association for Amateur Radio®

225 Main Street, Newington, CT 06111-1400 USA
1-860-594-0200, or 1-888-277-5289 (toll-free US only)
Mon. – Thurs. 8 AM to 7 PM EST, and Fri. 8 AM to 5 PM EST, except holidays

FAX 1-860-594-0259, email hq@arrl.org

Contact ARRL: www.arrl.org/contact-arrl



Website: www.arrl.org

Facebook: [@ARRL.org](https://www.facebook.com/ARRL.org)

X: [@arrl](https://twitter.com/arrl), [@w1aw](https://twitter.com/w1aw), [@arrl_ares](https://twitter.com/arrl_ares)

Threads: [@arrlhq](https://www.threads.net/@arrlhq)

Instagram and Instagram TV: [@arrlhq](https://www.instagram.com/arrlhq)

YouTube: [ARRLHQ](https://www.youtube.com/ARRLHQ)

LinkedIn: www.linkedin.com/company/american-radio-relay-league

The American Radio Relay League, Inc.

ARRL The National Association for Amateur Radio® in the United States: supports the awareness and growth of Amateur Radio worldwide; advocates for meaningful access to radio spectrum; strives for every member to get involved, get active, and get on the air; encourages radio experimentation and, through its members, advances radio technology and education; and organizes and trains volunteers to serve their communities by providing public service and emergency communications (*ARRL's Vision Statement, adopted in January 2016*).

ARRL is an incorporated, noncommercial association without capital stock chartered under the laws of the State of Connecticut, and is an exempt organization under Section 501(c)(3) of the Internal Revenue Code of 1986. Its affairs are governed by a Board of Directors, whose voting members are elected every 3 years by the general membership. The officers are elected or appointed by the Directors.

ARRL is noncommercial, and no one with a pervasive and continuing conflict of interest is eligible for membership on its Board.

"Of, by, and for the radio amateur," ARRL numbers within its ranks the vast majority of active amateurs in the nation and has a proud history of achievement as the standard-bearer in amateur affairs.

A *bona fide* interest in Amateur Radio is the only essential qualification of membership; an amateur radio license is not a prerequisite, although full voting membership is granted only to licensed amateurs in the US.

Membership inquiries and general correspondence should be addressed to the administrative headquarters: ARRL, 225 Main St., Newington, Connecticut 06111-1400 USA.

Officers, Division Directors, and Staff

As an ARRL member, you elect the Director and Vice Director who represent your Division on ARRL policy matters. If you have a question or comment about ARRL policies, contact your representatives listed below.

Officers

Founding President 1914-1936
Hiram Percy Maxim, W1AW

President
Rick Roderick, K5UR*
P.O. Box 444, Vilonia, AR 72173
501-988-2527; k5ur@arrrl.org

First Vice President
Kristen McIntyre, K6WX*
900 Golden Wheel Park Dr., #85
San Jose, CA 95112
510-703-4942; k6wx@arrrl.org

Second Vice President
Mike Ritz, W7VO
33643 Burma Rd.
Scappoose, OR 97056
503-987-1269; w7vo@arrrl.org

International Affairs Vice President
Rod Stafford, W6ROD
5155 Shadow Est.
San Jose, CA 95135
408-238-4671; w6rod@arrrl.org

Chief Executive Officer and Secretary
David A. Minster, NA2AA*
225 Main St.
Newington, CT 06111
860-594-0404; dminster@arrrl.org

Treasurer
John Sager, WJ7S

Chief Financial Officer
Diane Middleton, W2DLM

Staff

Director of Operations
Bob Naumann, W5OV

VEC Manager
Maria Somma, AB1FM

Field Services Manager
Mike Walters, W8ZY

Radiosport & Regulatory Information Manager
Bart Jahnke, W9JJ

Laboratory Manager
George Spatta, W1GKS

Director of Emergency Management
Josh Johnston, KESMHV

Membership Manager
Marc Spardello, W1NJ

Director of Marketing & Innovation
Bob Inderbitzen, NQ1R

Marketing Operations Manager
Jason Leonard

Retail Sales & Marketing Manager
Jackie Ferreira, KB1PWB

Advertising Sales Manager
Janet Rocco, W1JLR

Public Relations & Outreach Manager
Sierra Harrop, W5DX

Director of Publications & Editorial
Becky R. Schoenfeld, W1BXY

Education & Learning Manager
Steve Goodgame, K5ATA

Director of Development
Kevin Beal, K8EAL

Development Operations Manager
Christina Lessard, KC1TDM

Controller
Thomas Bell, KC1MHQ

Human Resources Manager
Luci Goodwin

*Executive Committee Member

Atlantic Division

www.atldiv.org
Robert B. Famiglio, K3RF
P.O. Box 9, Media, PA 19063
610-359-7300; k3rf@arrrl.org

Vice Director: Marty Pittinger, KB3MXM
4 Pegram Rd., Owings Mills, MD 21117
410-356-7899; kb3mxm@arrrl.org

Central Division

www.central.arrrl.org
Carl Luetzelschwab, K9LA
1227 Pion Rd., Fort Wayne, IN 46845
260-637-6988; k9la@arrrl.org

Vice Director: Brent Walls, N9BA
2151 E. Bomar Ln., Greenfield, IN 46140
317-557-7224; n9ba@arrrl.org

Dakota Division

www.arrrldakota.org
Bill Lippert, AC0W*
2013 6th Ave. SE, Austin, MN 55912
507-993-9181; ac0w@arrrl.org

Vice Director: Lynn Nelson, W0ND
3204 Willow Ln. SE, Minot, ND 58701
701-833-1000; w0nd@arrrl.org

Delta Division

www.arrrldelta.org
David A. Norris, K5UZ
907 Evening Sunset Cir., Redfield, AR 72132
870-613-1606; k5uz@arrrl.org

Vice Director: Ed B. Hudgens, WB4RHQ
1441 Wexford Downs Ln., Nashville, TN 37211
615-630-2753; wb4rhq@arrrl.org

Great Lakes Division

www.arrrl-greatlakes.org
Scott Yonally, N8SY
258 Valley Hi Dr., Lexington, OH 44904
419-512-4445; n8sy@arrrl.org

Vice Director: Roy Hook, W8REH
6611 Steitz Rd., Powell, OH 43065
w8reh@arrrl.org

Hudson Division

www.hudson.arrrl.org
Nomar Vizcarrondo, NP4H
P.O. Box 245, Tenaflly, NJ 07670
917-443-2664; np4h@arrrl.org

Vice Director: Ed Wilson, N2XDD
P.O. Box 483, Shirley, NY 11967
631-484-8826; n2xdd@arrrl.org

Midwest Division

www.arrrlmidwest.org
Art Zygielbaum, K0AIZ*
6601 Pinecrest Dr., Lincoln, NE 68516
402-421-0840; k0aiz@arrrl.org

Vice Director: Dave Propper, K2DP
747 Old Bonhomme Rd., University City, MO
63132, 314-225-5167; k2dp@arrrl.org

New England Division

<https://nediv.arrrl.org>
Fred Kemmerer, AB1OC*
39 Baldwin Ln., Hollis, NH 03049
603-413-5400; ab1oc@arrrl.org

Vice Director: Phillip E. Temples, K9HI
125 Coolidge Ave. #803
Watertown, MA 02472-2875
617-331-0183; k9hi@arrrl.org

Northwestern Division

www.arrrlnwdiv.org
Mark J. Tharp, KB7HDX
P.O. Box 2222, Yakima, WA 98907
509-952-5764; kb7hdx@arrrl.org
Vice Director: Michael A. Sterba, KG7HQ
212 Laurel Dr., Sedro Woolley, WA 98284
425-931-8525; kg7hq@arrrl.org

Pacific Division

www.pacific.arrrl.org
Anthony Marcin, W7XM
6836 Boulder Canyon St., North Las Vegas, NV
89084, 702-984-9589; w7xm@arrrl.org
Vice Director: Vacant

Roanoke Division

www.arrrl-roanoke.com
Dr. James Boehner, N2ZZ*
525 Barnwell Ave. NW, Aiken, SC 29801-3939
803-641-9140; n2zz@arrrl.org
Vice Director: Bill Morine, N2COP
101 Windlass Dr., Wilmington, NC 28409
910-452-1770; n2cop@arrrl.org

Rocky Mountain Division

www.rockymountaindivision.org
Jeff Ryan, K0RM*
9975 Wadsworth Pkwy. K2-275
Westminster, CO 80021
303-432-2886; k0rm@arrrl.org
Vice Director: Dan Grady, N2SRK
8706 S. Buchanan Way, Aurora, CO 80016
720-236-7397; n2srk@arrrl.org

Southeastern Division

www.facebook.com/ARRLSoutheasternDivision
Mickey Baker, N4MB
14764 Black Bear Rd., West Palm Beach, FL
33418, 561-320-2775; n4mb@arrrl.org
Vice Director: Jeff Beals, WA4AW
P.O. Box 1584, Loxahatchee, FL 33470
561-252-6707; wa4aw@arrrl.org

Southwestern Division

www.kkn.net/n6aa
Richard J. Norton, N6AA
21290 West Hillside Dr., Topanga, CA 90290
310-455-1138; n6aa@arrrl.org
Vice Director: Edward Stearns, AA7A
7038 E. Aster Dr., Scottsdale, AZ 85254
480-332-8255; aa7a@arrrl.org

West Gulf Division

www.westgulfddivision.org
John Robert Stratton, N5AUS
P.O. Box 2232, Austin, TX 78768-2232
512-445-6262; n5aus@arrrl.org
Vice Director: Lee H. Cooper, W5LHC
2507 Autrey Dr., Leander, TX 78641
512-658-3910; w5lhc@arrrl.org

How to Contact ARRL Staff

To send an email to any ARRL Headquarters staff member, put his or her call sign (or first initial and last name) in front of @arrrl.org. For example, to send to Hiram Maxim, First President of ARRL, use w1aw@arrrl.org or hmaxim@arrrl.org.

ARRL Section Managers

The 15 Divisions of ARRL are arranged into 71 administrative *Sections*, each headed by an elected *Section Manager* (SM). Your SM is the person to contact when you have news about your activities, or those of your radio club. If you need assistance with a local problem, your SM is your first point of contact. He or she can put you in touch with various ARRL volunteers who can help (such as Technical Specialists). Your SM is also the person to see if you'd like to become a Section volunteer. Whatever your license class, your SM has an appointment available. Visit your Section page at www.arrrl.org/sections.

Atlantic Division DE, EPA, MDC, NNY, SNJ, WNY, WPA

Delaware: Steven Keller, KC3DSO, 803 Meadow Brook Ln., Milford, DE 19963-3000; 240-515-0620; kc3dso@arrrl.org
Eastern Pennsylvania: Bob Wilson, W3BIG, 2223 West Helms Manor, Upper Chichester, PA 19061-3325; 484-836-9367; w3big@arrrl.org
Maryland-DC: Chris Van Winkle, AB3WG, 24 Tattersaul Ct., Reisterstown, MD 21136-2431; 240-755-4257; ab3wg@arrrl.org
Northern New York: Rocco Conte, WU2M, 152 W. Bush Rd., Gloversville, NY 12078-6405; 518-848-9028; wu2m@arrrl.org
Southern New Jersey: Tom Preiser, N2XW, 177 Bowsprit Rd., Manahawkin, NJ 08050-5001; 609-618-0224; n2xw@arrrl.org
Western New York: Laura Mueller, N2LJM, 2011 E. Main St., Falconer, NY 14733 716-338-3122; n2ljm@arrrl.org
Western Pennsylvania: Joe Shupienis, W3BC, P.O. Box 73, Falls Creek, PA 15840-0322; 814-771-3804; w3bc@arrrl.org

Central Division IL, IN, WI

Illinois: Thomas Beebe, W9RY, 3540 Market Rd., Marion, IL 62959-8940 618-534-6282; w9ry@arrrl.org
Indiana: Bob Burns, AK9R, P.O. Box 808, Brownsburg, IN 46112 317-520-1188; ak9r@arrrl.org
Wisconsin: Jason Spetz, KC9FXE, E5910 490th Ave., Menomonie, WI 54751-5644 715-231-7722; kc9fxe@arrrl.org

Dakota Division MN, ND, SD

Minnesota: Bill Mitchell, AE0EE, 7412 Colfax Ave. S., Richfield, MN 55423 510-529-5658; ae0ee@arrrl.org
North Dakota: Ralph Fettig, N0RDF, 6650 County Rd. 12 W., Minot, ND 58701-3003 701-822-3467; n0rdf@arrrl.org
South Dakota: Chris Stallkamp, KI0D, P.O. Box 271, Selby, SD 57472-0271 605-848-3929; ki0d@arrrl.org

Delta Division AR, LA, MS, TN

Arkansas: James D. Ferguson, Jr., N5LKE, 1500 Lauren Dr., Searcy, AR 72143-8477 501-593-5695; n5like@arrrl.org
Louisiana: Houston Polson, N5YS, 309 Arkansas St., Winnfield, LA 71483 318-209-8843; n5ys@arrrl.org
Mississippi: Malcolm Keown, W5XX, 64 Lake Circle Dr., Vicksburg, MS 39180 601-636-0827; w5xx@arrrl.org
Tennessee: David Thomas, KM4NYI, 205 Linford Rd., Knoxville, TN 37920 865-654-5489; km4nyi@arrrl.org

Great Lakes Division KY, MI, OH

Kentucky: Charles O'Neal, KE4AIE, 301 Autumn Ridge Rd., Glasgow, KY 42141-9699 502-680-0539; ke4aie@arrrl.org
Michigan: Larry Camp, WB8R, 71 Oakdale Ln., Coldwater, MI 49036-1200 517-617-4883; wb8r@arrrl.org
Ohio: Tom Sly, WB8LCD, 1480 Lake Martin Dr., Kent, OH 44240-6260 330-554-4650; wb8lcd@arrrl.org

Hudson Division ENY, NLI, NNJ

Eastern New York: John K. Fritze, Jr., K2QY, 4 Normanskill Blvd., Delmar, NY 12054-1335; 401-261-4996; k2qy@arrrl.org
NYC-Long Island: Jim Mezey, W2KFV, 38 Appletree Ln., Carle Place, NY 11514-1336; 516-315-8608; w2kfv@arrrl.org
Northern New Jersey: Bob Buus, W2OD, 8 Donner St., Holmdel, NJ 07733-2004 732-946-8615; w2od@arrrl.org

Midwest Division IA, KS, MO, NE

Iowa: Lelia Garner, WA0UIG, 145 Front St., Robins, IA 52328-9718 319-213-3539; wa0uig@arrrl.org
Kansas: Ronald D. Cowan, KB0DTI, P.O. Box 36, La Cygne, KS 66040 913-757-4456; kb0dti@arrrl.org
Missouri: Cecil Higgins, AC0HA, 27995 County Rd. 220, Hermitage, MO 65668-8493 417-493-8208; ac0ha@arrrl.org
Nebraska: Matthew N. Anderson, KA0BOJ, 14300 NW 98th St., Raymond, NE 68428-4254; 402-480-5515; ka0boj@arrrl.org

New England Division CT, EMA, ME, NH, RI, VT, WMA

Connecticut: Bud Kozloff, W1NSK, 223 Gallows Hill Rd., Redding, CT 06896-1413 203-939-3708; w1nsk@arrrl.org
Eastern Massachusetts: Jon McCombie, N1ILZ, 75 Northwest St., Eastham, MA 02642 508-246-4982; n1ilz@arrrl.org
Maine: Philip Duggan, N1EP, 195 Kansas Rd., Milbridge, ME 04658-3120 207-598-5397; n1ep@arrrl.org
New Hampshire: Peter Stohrer, W1FEA, 9 Gladstone St., Concord, NH 03301-3130 603-345-1470; w1fea@arrrl.org
Rhode Island: Nancy Austin, KC1NEK, P.O. Box 4941, Middletown, RI 02842-0941 401-935-3070; kc1nek@arrrl.org
Vermont: Paul N. Gayet, AA1SU, 11 Cherry St., Essex Junction, VT 05452 802-878-2215; aa1su@arrrl.org
Western Massachusetts: Raymond Lajoie, AA1SE, 245 Leominster Rd., Lunenburg, MA 01462-2031; 978-549-5507; aa1se@arrrl.org

Northwestern Division AK, EWA, ID, MT, OR, WWA

Alaska: David Stevens, KL7EB, 8521 Golden St., Apt. 4, Anchorage, AK 99502 907-242-6483; kl7eb@arrrl.org
Eastern Washington: Jo Whitney, KA7LJQ, P.O. Box 2222, Yakima, WA 98907 509-952-5765; ka7ljq@arrrl.org
Idaho: Dan Marler, K7REX, 6525 W. Fairfield Ave., Boise, ID 83709 208-914-8939; k7rex@arrrl.org
Montana: Kevin Kerr, W1KKG, P.O. Box 69, Plains, MT 59859-0069 406-242-0109; w1kgk@arrrl.org
Oregon: Scott Rosenfeld, N7JI, 3662 Vine Maple St., Eugene, OR 97405-4473 541-684-9970; n7ji@arrrl.org
Western Washington: Monte L. Simpson, W7FF, P.O. Box 3008, Silverdale, WA 98383 360-633-7665; w7ff@arrrl.org

Pacific Division EB, NV, PAC, SCV, SF, SJV, SV

East Bay: Mike Patterson, N6JGA, P.O. Box 30627, Walnut Creek, CA 94598 925-200-8300; n6jga@arrrl.org
Nevada: John Bigley, N7UR, 2420 Palora Ave., Las Vegas, NV 89121-2157 702-498-5829; n7ur@arrrl.org
Pacific: Alan Maenchen, AD6E, 2164 Kamaile St., Wailuku, HI 96793-5458 408-382-1008; ad6e@arrrl.org
Sacramento Valley: Dr. Carol Milazzo, KP4MD, P.O. Box 665, Citrus Heights, CA 95611-0665; 916-259-3221; kp4md@arrrl.org
San Francisco: Dr. Antonis Papatsaras, AA6PP, 48 Bayo Vista Ave., Larkspur, CA 94939-1006; 415-861-5053; aa6pp@arrrl.org
San Joaquin Valley: John Litz, NZ6Q, 1434 Douglas Rd., Stockton, CA 95207-3536 209-331-3078; nz6q@arrrl.org
Santa Clara Valley: James Armstrong, NV6W, 2048 Paseo Del Sol, San Jose, CA 95124-2048; 408-679-1680; nv6w@arrrl.org

Roanoke Division NC, SC, VA, WV

North Carolina: Marvin K. Hoffman, WA4NC, P.O. Box 2208, Boone, NC 28607 828-964-6626; wa4nc@arrrl.org
South Carolina: John Gendron, NJ4Z, 3052 Devonshire Dr., Rock Hill, SC 29732-9260 704-649-2210; nj4z@arrrl.org
Virginia: Jack Smith, KE4LWT, 515 New Life Dr., Ruckersville, VA 22968-3045 662-523-0000; ke4lwt@arrrl.org
West Virginia: Dan Ringer, K8WV, 18 W. Front St., Morgantown, WV 26501-4507 304-292-1999; k8wv@arrrl.org

Rocky Mountain Division CO, NM, UT, WY

Colorado: Amanda Alden, K1DDN, 230 Glenmoor Rd., Canon City, CO 81212-7705 719-315-0434; k1ddn@arrrl.org
New Mexico: Bill Mader, K8TE, 4701 Sombrette Rd. SE, Rio Rancho, NM 87124 505-250-8570; k8te@arrrl.org
Utah: Pat Malan, N7PAT, 10102 S. Redwood Rd. #95401, South Jordan, UT 84095 801-413-7438; n7pat@arrrl.org
Wyoming: Garth Crowe, Sr., WY7GC, 2342 Sagewood Ave., Casper, WY 82601-5018 307-689-1340; wy7gc@arrrl.org

Southeastern Division AL, GA, NFL, PR, SFL, VI, WCF

Alabama: Dennis Littleton, K4DL, 2230 Bishop Rdg., West Blocton, AL 35184-4246 205-718-4410; k4dl@arrrl.org
Georgia: Hank Blackwood, K4HYJ, 406 Dawnville Rd. NE, Dalton, GA 30721 706-529-5647; k4hyj@arrrl.org
Northern Florida: Scott Roberts, KK4ECR, 2361 Oak Hammock Ln., Orange Park, FL 32065; 904-759-7812; kk4ecr@arrrl.org
Puerto Rico: Rene Fonseca, NP3O, Urb Santa Isidra 4 G8 Calle 6, Fajardo, PR 00738-4145; 939-579-4134; np3o@arrrl.org
Southern Florida: Barry M. Porter, KB1PA, 14555 Sims Rd., Apt. 259, Delray Beach, FL 33484; 561-499-8424; kb1pa@arrrl.org
Virgin Islands: Fred Kleber, K9VV, P.O. Box 24275, Christiansted, VI 00824-0275; k9vv@arrrl.org
West Central Florida: Michael Douglas, W4MDD, 2527 Apple Blossom Ln., Wauchula, FL 33873; 863-585-1648; w4mdd@arrrl.org

Southwestern Division AZ, LAX, ORG, SB, SDG

Arizona: Rick Paquette, W7RAP, 1600 W. Sunkist Rd., Tucson, AZ 85755-9561 520-425-6877; w7rap@arrrl.org
Los Angeles: Diana Feinberg, A6DF, P.O. Box 4678, Palos Verdes Peninsula, CA 90274-9618; 310-544-2917; a6df@arrrl.org
Orange: Bob Turner, W6RHK, P.O. Box 973, Perris, CA 92572 951-236-8975; w6rhk@arrrl.org
San Diego: Dave Kallenborn, N8KBC, 630 Alber St., Chula Vista, CA 91911 619-616-8758; n8kbc@arrrl.org
Santa Barbara: John Kitchens, NS6X, P.O. Box 178, Somis, CA 93066 805-216-2569; ns6x@arrrl.org

West Gulf Division NTX, OK, STX, WTX

North Texas: Steven Lott Smith, KG5VK, 125 Contest Ln., Ben Franklin, TX 75415-3830; 318-470-9806; kg5vk@arrrl.org
Oklahoma: Mark Kleine, N5HZR, 2651 84th Ave. SE, Norman, OK 73026 405-410-6756; n5hzz@arrrl.org
South Texas: Stuart Wolfe, KF5NIX, 408 Cedar Grove Rd., Rockdale, TX 76567 512-660-9954; kf5nix@arrrl.org
West Texas: H. Dale Durham, W5WI, P.O. Box 375, Buffalo Gap, TX 79508 830-719-9000; w5wi@arrrl.org

New!

1200 Watt **LDMOS** Amp

Ameritron 1.2kW, 160-6M LDMOS Amplifier

1200 Watts PEP Output... 1.5-54 MHz... Auto bandswitching, no tuning, no warm-up, SWR protected, Quiet Variable-Speed Cooling... Fwd/Ref PEP, PA Balance, ALC, V/I Metering

AMERITRON new ALS-1406 1.5-54 MHz solid state LDMOS no-tune Amplifier gives you 1200 Watts PEP output on all bands, including 6-Meters. Automatic bandswitching! No tuning! No warm-up! No tubes! Quiet!

Two NXP M/RFE6VP5600 H LDMOS transistors insure reliability. They are mounted on dual heavy duty heat sinks and properly arranged to spread heat out over a large surface.

The ALS-1406 RF deck operates at 50 Volts for efficient, low distortion linear RF power service. It's cooled by a whisper quiet fan. Fan speed is regulated by temperature sensors, assuring minimum noise.

1200 Watts PEP on all bands 1.5-54 MHz including 6 Meters

ALS-1406 runs up to 1200 Watts of clean SSB output power (just 100 Watts drive gives you the full rated 1200 Watts output) for continuous coverage between 1.5-54 MHz. 10/12 Meters is included.

This compact operator-friendly and attractive desk-top amplifier fits neatly into any station. Just 10Wx6 1/2Hx18 1/2D inches. Weighs only 22 pounds.


SWR Protection prevents amplifier damage if you switch to a wrong band, use the wrong antenna or have high SWR.

If forward or reflected output power



ALS-1406
\$3499
Suggested Retail

Call your favorite dealer for your best price!

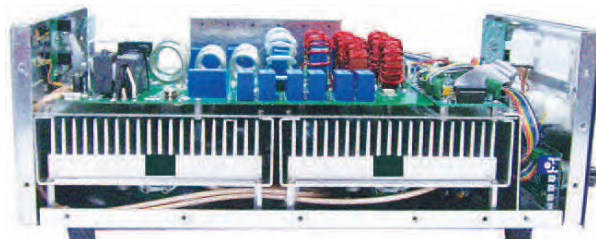

exceeds a safe level then output power is automatically reduced to prevent amplifier damage by controlling ALC to exciter.

LED-illuminated Cross-Needle SWR/Wattmeter lets you read SWR, forward and reflected peak power simultaneously. You also get ALC, SWR, PA balance and current metering with LED backlight. An Operate/Standby switch lets you run "barefoot", but you can instantly switch to full power if needed.

Front-panel ALC control!

This exclusive Ameritron feature lets you adjust output power conveniently from the front panel.

Has bandswitch, ALC, SWR, PA and TX LED indicators.

Automatic Bandswitching!

Place your amplifier and power supply out-of-the-way and control your amplifier directly from your rig!

ALS-1406 automatic bandswitching reads band data from your transceiver and automatically changes bands as you change bands. An optional interface cable is required for your particular radio.

Clean, Modular Construction

Ameritron ALS-1406 amplifier has modular construction for easy-servicing, unlike other amplifiers that are so tightly packed they are un-serviceable.

ALS-1406 Power Supply

The ALS-1406 is powered by a 50 VDC switching power supply. Comes with a pre-wired cable to plug into the ALS-1406.

This hash-free fully regulated switching power supply is only 12 lbs. and measures a compact 10Wx6 1/2Hx9 1/2D inches. It can be placed conveniently out-of-the-way. Output is 50 VDC at 50 Amps to the ALS-1306. Wired for 220 VAC, selectable to 110 VAC. Draws less than 25 Amps at 110 VAC; 12 Amps at 220 VAC.

ALS-606S 600W FET Fixed Station Amp

600 Watts PEP/500W CW output, 160-6M with automatic instant band-switching. Desktop size: 9 3/4Wx7Hx14 1/2D inches. Just 14.2 lbs. It's only 4 dB below 1500W -- less than an S-unit -- nobody can hear the difference! SWR/thermal protected, extremely quiet, lighted peak reading Cross-Needle SWR/Wattmeter, front panel ALC control. Includes 110 VAC switching power supply. 220 VAC selectable.

ALS-606, \$2799, like ALS-606S above, but has transformer power supply.



ALS-606S
\$2599
Suggested Retail

ALS-500M 500 Watt Mobile Amplifier



ALS-500M
\$1199
Suggested Retail

500 Watts PEP/400W CW output, instant bandswitching, no tuning, no warm-up. SWR, load fault, thermal overload protected. On/Off/Bypass switch. Remote on/off control. DC current meter. Very quiet fan. 1.5-22 MHz (10/12 Meters with MOD-10M, \$29.95). Requires 13.8 VDC. 9Wx3 1/2Hx15D in., 7 lbs.

ALS-500RC, \$89.95, Remote Head. SPS-75MV, \$399.95. 110VAC input, 75A at 13.8 VDC output power supply for using ALS-500M at home.



ALS-600S
\$2399
Suggested Retail

ALS-600S 600 Watt FET Amp

1.5-22 MHz, instant band-switching, fully SWR protected, switching P.S. ALS-600, \$2599. With Regulated DC P.S.

Call your dealer for your best price!

AMERITRON®

... the world's high power leader!

116 Willow Road, Starkville, MS 39759
TECH (662) 323-8211 • FAX (662) 323-6551
8 a.m. - 4:30 p.m. CST Monday - Friday
For power amplifier components call (662) 323-8211
Prices and specifications subject to change without notice. ©2024 Ameritron.

www.ameritron.com

Epic PWRgate

DC Power Management Has Never Been so **Epic**
Automatic Backup Switching & Charging



**2 Models
Available**

Works with Lead-Acid or LiFePO4 Batteries!

Features

- 12 volt backup power system rated at 40 amperes continuous
- Eliminates danger of connecting a power supply directly to a battery
- Low loss PWRgate provides forward voltage drop of only 0.05 volts
- USB port access to monitor system or to change charge parameters
- Instantly switch to battery during a outage or power supply failure
- Supports power supply and direct solar panel MPPT battery charging
- Efficient MPPT algorithm optimizes solar charging
- Utilizes industry standard Anderson Powerpoles® (45A rating)

Easy set up for solar

Powerpole® to Solar MC4 Adapter Cable

Price/Sku: \$19.95 (58257-1859)



262-522-6503 ext 35
sales@westmountainradio.com
westmountainradio.com/QST324



Powerpole® is a registered trademark of Anderson Power Products, Inc

NEW

ELECRAFT® KH1

**HAND-HELD,
5-BAND TRANSCEIVER**

YOUR E-TICKET TO ADVENTURE

KH1 Features

- ▲ 40-15 m bands; 6.7-22 MHz SWL
- ▲ CW mode; 5 watts, all bands
- ▲ ATU includes whip & high-Q inductor for 20/17/15 m*
- ▲ 2.5 AH Li-Ion battery & internal charger*
- ▲ CW decode & 32K TX log
- ▲ Scan/mini-pan feature
- ▲ Real-Time Clock
- ▲ Weights only 6 oz (less batt)
- ▲ Speaker
- ▲ RIT, XIT, & VFO lock



KX-LINE: KX2/KX3

ELECRAFT® FULL-FEATURED ULTRA-PORTABLES 100W WITH MATCHING AMP

KX2 Ultralight Grab-and-Go Station Perfect for SOTA & Field Operations

- ▲ 5.8" x 2.8" x 1.5" (weight: 13 oz.)
- ▲ 80-10 meters (9 bands)
- ▲ SSB / CW / Data / AM / FM
- ▲ Up to 12 W TX
- ▲ Internal 2.6 Ah Li-ion battery*
- ▲ Built-in mic for HT-style operation
- ▲ Wide-range internal ATU*

KX3 Compact 160-6 Meter, All-Mode Transceiver

- ▲ Best-in-class performance
- ▲ 7.4" x 3.5" x 1.7" (weight: 1.5 lbs.)
- ▲ Matching PX3 panadapter*
- ▲ 160-6 meters plus 2 or 4 m*
- ▲ SSB, CW, AM, FM, Data
- ▲ Up to 15 W TX
- ▲ Wide-range internal ATU*



K4 DIRECT-SAMPLING SDR AND KPA1500 LEGAL-LIMIT AMP

K4 Features

- ▲ High-Performance Direct Sampling SDR
- ▲ Comprehensive I/O
- ▲ 7" color screen with touch and mouse control
- ▲ 3 antenna jacks
- ▲ Single or dual RX panadapter
- ▲ Full remote control via Ethernet
- ▲ ATU with 10:1+ range
- ▲ Up to 5 receive antenna sources

KPA1500 Features

- ▲ 1500 W • Very compact design
- ▲ Built-in ATU with dual antenna jacks
- ▲ Fast, silent PIN diode T/R switching
- ▲ Compatible with nearly any transceiver – custom cables available 160-6 meters
- ▲ CE for Europe



NEW!

K4D Packages!
Visit elecraft.com
for details

ELECRAFT®

*Options


For complete features and specifications, visit elecraft.com | Sales@elecraft.com | 831.763.4211

**MAKE WAVES IN STYLE
WITH THE NEW K-LINE**

Up Front

CQ Hotel — The Place Where Hams Stay

While traveling through Philadelphia, Pennsylvania, Paul Sacks, WB9CZS, came across this hotel, CQ Club Quarters. Looks like a perfect place for hams, though there is no mention of a ham shack in the hotel's list of amenities.

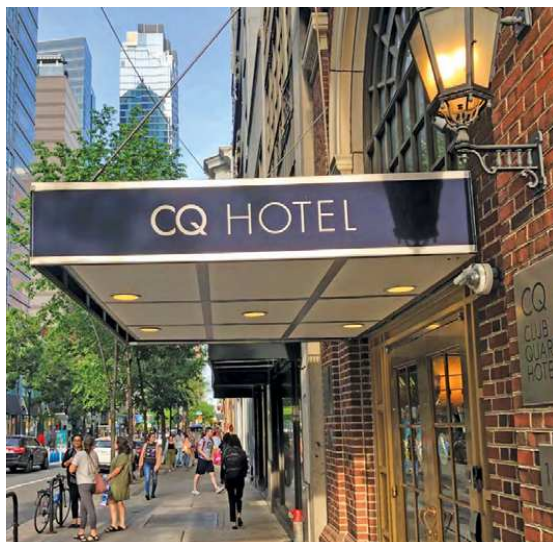

FCC Expanding Services?

Looks like the FCC may be providing a new service. Peter Parrish, KG6KWV, snapped this photo while doing errands in Sunnyvale, California. We couldn't find a direct connection to the FCC from this auto body repair shop; perhaps the letters are the original owner's initials.



Going QRT?

This QRT van has been seen in many places throughout Hurricane, West Virginia. Clark Stewart, W8TN, finally got a photo while at Putnam County Parks and Recreation Valley Park. Fortunately, this QRT is not signing off. Quick Response Teams are three-person teams consisting of a paramedic, a law enforcement professional, and a counselor/recovery coach. Their goal is to reduce overdoses and overdose-related deaths, promote treatment services, and build healthy communities.



QRM Mystery Solved

Todd Gahagan, WA7U, took this photo to let us know he has finally discovered where QRM comes from. And he says, "It looks like they have a lot of it!" This is the sign for Quality Ready Mix concrete in Bozeman, Montana.



If you see something ham-related out in the world, take a photo of it and send it to "Up Front" at upfront@arri.org.

FOR THE THRILL OF THE HUNT.

We're for every corner of the earth. So much so it's led to revolutionizing the ham radio industry as the leader in software-defined radios (SDRs) design. Because when you're looking to connect with people and places that may or may not even be on the map, you better have the best partner in technology on the planet. Contest season is upon us, and it's time to prepare your station. To learn more about our boundary-pushing products, visit FlexRadio.com.



Find Everywhere

GO. SEEK. FIND.





TRUSTED QUALITY

That Makes Amateur Radio EASY!

***For
novice &
advanced
users.***

✓ ***Huge Selection***

✓ ***Premium Quality***

✓ ***Affordable Prices***

✓ ***Unparalleled Customer
Service***




Desktop Tuners



Zero Power Tuners



Remote Tuners

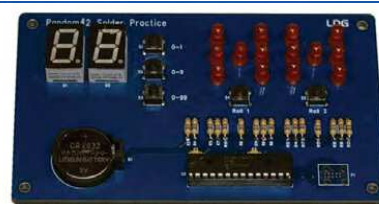

Hobby Accessories



www.LDGElectronics.com

Phone: 410-586-2177

Serving HAMS Everywhere!

Put A Spring In Your STEP

Stay Active On All The Bands



IC-905

2M / 70CM / 23CM / 13CM / 5CM

***Optional
CX-10G**
10GHz Transverter



IC-705

HF / 6M / 2M / 70CM

ANALOG / DIGITAL



IC-7610

HF / 6M



ID-50A

2M / 70CM



IC-7300

HF / 6M



IC-7100

HF / 6M / 2M / 70CM



ID-52A

2M / 70CM



ID-5100AD

2M / 70CM



IC-V86

2M



IC-V3500

2M

ANALOG



IC-T10

2M / 70CM

For the love of **ham radio.**



www.icomamerica.com/amateur
insidesales@icomamerica.com

©2024 Icom America Inc. The Icom logo is a registered trademark of Icom Inc.
All specifications are subject to change without notice or obligation. 31602



Correspondence

Letters from Our Members

Troubleshooting Kept Me from Buying New Gear

My Kenwood TM-V71A started acting up and rebooted itself whenever I keyed the transmitter. I also have a Kenwood TS-590S and an Icom IC-7600. I use an Alinco DM-330MV for switching power supply. I use two grounding bar kits to distribute the power from the Alinco. I'm downsizing, so I don't have an exotic setup for repairs. I have a digital voltmeter and a few other basic items, and after asking my fellow club members for help, I still couldn't figure out what was wrong.

I took everything apart, took all the power leads off the terminal strips, and did a complete hands-on check of the fuses with the Alinco. I had a couple of Powerpoles that I thought were installed correctly, but I cut them off and soldered the wires. I hooked up the radio directly to the Alinco, and it failed. I realized I should have checked the meter on the front of the Alinco. I always keep it in the power position. If I had switched it to the amp position, I would have seen that when I keyed up the amp meter, it didn't register anything. When I used the antenna tuner on the Kenwood TS-590S, the radio turned off and came back on when I released the AT button. I disconnected the Kenwood TS-590S, hooked up the Icom, and got the same results.

I remembered I had a Samlex SEC-1235M stashed away. I found it and hooked it up, and everything worked! I hooked the Alinco back up and put the meter to the amp position, but there was no reading when I keyed it. I looked at www.groups.io and saw a suggestion that the power cable might be bad, and after the repair, it worked.

Looking back, I could have saved time if I had the Alinco switch in the amp position and saw that no amperage was being drawn — and I had a better understanding of what happens when you key a radio. I was 10 minutes away from ordering a new radio. I wonder

how many people would have bought new gear only to find it wouldn't have worked. It's a matter of putting in the time and being a self-starter. The information is there; it's just a matter of finding it, learning, and understanding.

John Smale, K2IZ
Copiague, New York
Life Member

Suggestions to Build on FT8 Article

I love QST and look forward to it every month. There is always something interesting to read. The article "FT8 Visualized" by Thomas W. Brooks, KE1R, in the January 2024 issue was fantastic. Learning some of the nuts and bolts behind FT8 was eye-opening. I would love a follow-up article that gets more in-depth about what Gray code is, why that matters, and how all of this is translated to the American Standard Code for Information Interchange.

Thomas Johnson, K9KJ
Munster, Indiana
Life Member

FT8 Configuration and On-Air Noise Tips

To properly ensure good amateur practices on FT8, an operator must monitor their incoming and outgoing audio on a speaker or headphones. The proper transceiver and software configurations for FT8 operation are frequently ignored. If you listen in the FT8 windows on HF, you regularly hear a cacophony of noise, even possible rule violations.

For microphone sounds, I found that my Yaesu FTdx101D does not disable my boom microphone when using the USB connection for FT8. So, telephones ringing, dogs barking, and conversations go over the air. SSB voice is not permitted in the RTTY/DATA/CW band segment. The only fix is to turn the mic gain to zero or disconnect it. The menu misleads you to believe you have selected the correct USB connection source on the rear of the radio, but it still leaves the mic input active.

Proper transceiver configuration and monitoring will prevent this.

Computer sounds such as dings, "you've got mail," etc., are sent to the radio's speakers rather than the computer's. There is a setting that turns the computer's sounds off if you cannot get the configuration right. *JTAlert* sounds also go out over the air because they go to the rig's sound card instead of the computer speakers. If you cannot get the *JTAlert* audio sent to the right place, turn off the audio notifications.

This is particularly important on 60 and 30 meters, where you cannot discern a primary user's request to suspend operation from a waterfall. We must ensure our operating practices are appropriate to continue to access that spectrum. Even on our primary spectrum, we need to prevent interference.

Janis Carson, AB2RA
Ithaca, New York

Frequent Activator and Hunter

Great job on the "How to Become a POTA Hunter" article in the January 2024 issue of QST. I love to activate and hunt, and Harold Kramer, WJ1B, addressed all the key points.

As an activator, I try to spend a bit of time conversing, which is admittedly a balancing act. The challenge, of course, is realizing a hunter is patiently waiting. I'm curious about what people are up to and enjoy learning about their stations. It's refreshing to step off the assembly line of rapid-fire signal report exchanges. This has resulted in some wonderful on-air friendships. Congrats on a great piece!

Paul Talbot, K7RKO
Las Vegas, Nevada

Send your letters to letters@arrl.org. We read every letter received, but we can only publish a few each month. We reserve the right to edit your letter for clarity, and to fit the available page space. Letters published in "Correspondence" may also appear in other ARRL media. The publishers of QST assume no responsibility for statements made by correspondents.



Work the World with a **DX Commander Antenna!**

Take advantage of lightning-fast shipping and savings when you purchase world-famous DX Commander HF multiband vertical antennas from DX Engineering. Choose from seven innovative models, from the CLASSIC Plus 80 (80-2M) to the Expedition Portable (40-6M)—all designed by Callum McCormick, M0MCX for easy deployment and proven performance.

Packages come with sturdy fiberglass telescopic mast, stainless fasteners, aluminum ground and driven plates, spreader plates, EzyClamp stay-up kit, antenna wire, guying rope, and shock-cord.

- Antenna design based on the same principles as a fan dipole
- Efficient resonance on every HF band of operation
- Low SWR without the need for traps, coils, or tuners
- Low take-off angle
- Power rating of 1,500W SSB/CW; 400W Digital

DX COMMANDER



Order by Phone

800-777-0703 Country Code: +1
9 am to midnight ET, Monday-Friday
9 am to 5 pm ET, Weekends



Order Online

www.DXEngineering.com
Most orders over \$99 ship free
Request a Free Catalog



Tech Support





330-572-3200
DXEngineering@DXEngineering.com
9 am to 7 pm ET, Monday-Friday
9 am to 5 pm ET, Saturday

DX[®]
ENGINEERING

DX Engineering is the exclusive distributor of DX Commander Antennas in North America.





OnAllBands.com is dedicated to educating and informing the Amateur Radio community.

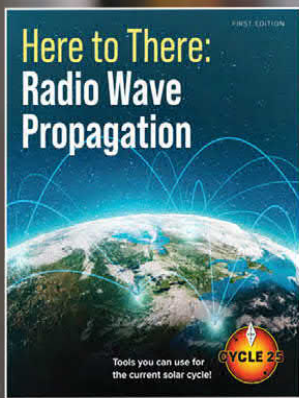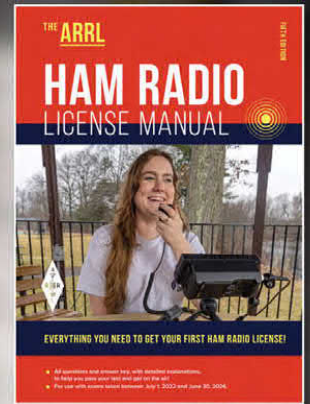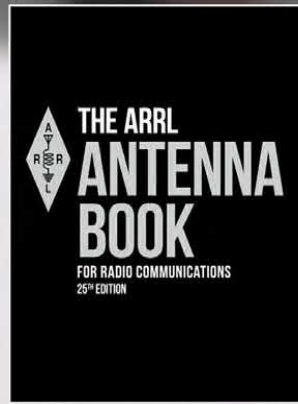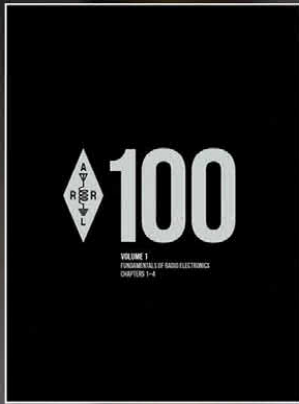


Stay in the Know

ARRL Publications
and Journals

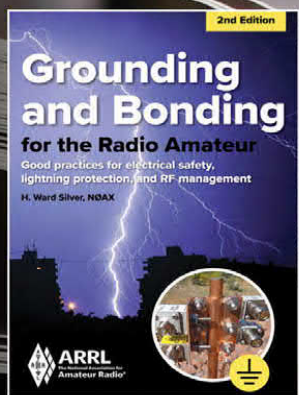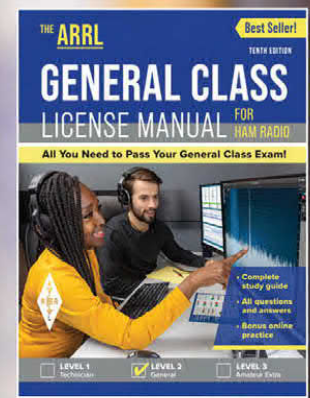

www.arrl.org/shop

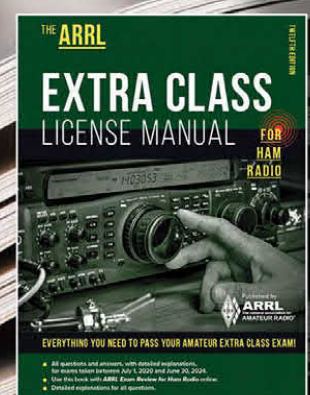



Get Expert Advice
and Faster Delivery of

EMCOMM Products

We Make it Easy

Make DX Engineering your source for incredibly fast shipping of everything you need to stay prepared and help during a crisis: handheld, mobile, and base rigs; all-in-one Go Boxes; Red Cross-endorsed emergency weather radios; portable antennas; and much more.

Plus, you'll talk with longtime hams who make sure you're getting just the right EMMCOMM gear for effective home and portable operations.

Make the Change to a More Satisfying Ham Radio Purchasing Experience

- Easy ordering by phone or web
- Products from over 170 leading manufacturers
- Friendly customer service from hams with a combined 1,000+ years in amateur radio
- Fastest shipping in the industry
- Responsive and ongoing technical support
- Not 100% happy? We make it right!



Order by Phone

800-777-0703 Country Code: +1
9 am to midnight ET, Monday-Friday
9 am to 5 pm ET, Weekends



Order Online

www.DXEngineering.com
Most orders over \$99 ship free
Request a Free Catalog



Tech Support

330-572-3200
DXEngineering@DXEngineering.com
9 am to 7 pm ET, Monday-Friday
9 am to 5 pm ET, Saturday



SANGEAN

etON

GATOR
Cases

plasticase
NANUK
PROFESSIONAL PROTECTIVE CASES

 **Bioenno Power.**

**ON ALL
BANDS**

OnAllBands.com is dedicated to educating and informing the Amateur Radio community.

W1AW Schedule

PAC	MTN	CENT	EAST	UTC	MON	TUE	WED	THU	FRI
6 AM	7 AM	8 AM	9 AM	1300		FAST CODE	SLOW CODE	FAST CODE	SLOW CODE
7 AM-12 ⁴⁵ PM	8 AM-1 ⁴⁵ PM	9 AM-2 ⁴⁵ PM	10 AM-3 ⁴⁵ PM	1400-1945	VISITING OPERATOR TIME				
1 PM	2 PM	3 PM	4 PM	2000	FAST CODE	SLOW CODE	FAST CODE	SLOW CODE	FAST CODE
2 PM	3 PM	4 PM	5 PM	2100	CODE BULLETIN				
3 PM	4 PM	5 PM	6 PM	2200	DIGITAL BULLETIN				
4 PM	5 PM	6 PM	7 PM	2300	SLOW CODE	FAST CODE	SLOW CODE	FAST CODE	SLOW CODE
5 PM	6 PM	7 PM	8 PM	0000	CODE BULLETIN				
6 PM	7 PM	8 PM	9 PM	0100	DIGITAL BULLETIN				
6 ⁴⁵ PM	7 ⁴⁵ PM	8 ⁴⁵ PM	9 ⁴⁵ PM	0145	VOICE BULLETIN				
7 PM	8 PM	9 PM	10 PM	0200	FAST CODE	SLOW CODE	FAST CODE	SLOW CODE	FAST CODE
8 PM	9 PM	10 PM	11 PM	0300	CODE BULLETIN				

W1AW's schedule is at the same local time throughout the year. From the second Sunday in March to the first Sunday in November, UTC = Eastern US time + 4 hours. For the rest of the year, UTC = Eastern US time + 5 hours.

♦ Morse code transmissions: Frequencies are 1.8025, 3.5815, 7.0475, 14.0475, 18.0975, 21.0675, 28.0675, 50.350, and 147.555 MHz.

Slow Code = practice sent at 5, 7½, 10, 13, and 15 WPM.

Fast Code = practice sent at 35, 30, 25, 20, 15, 13, and 10 WPM.

Code bulletins are sent at 18 WPM.

For more information, visit us at

www.arrl.org/w1aw

♦ W1AW Qualifying Runs are sent on the same frequencies as the Morse code transmissions. West Coast qualifying runs are transmitted by various West Coast stations on CW frequencies that are normally used by W1AW, in addition to 3590 kHz, at various times. Underline 1 minute of the highest speed you copied, certify that your copy was made without aid, and send it to ARRL for grading. Please include your name, call sign (if any), and complete mailing address. Fees: \$10 for a certificate, \$7.50 for endorsements.

♦ Digital transmissions: Frequencies are 3.5975, 7.095, 14.095, 18.1025, 21.095, 28.095, 50.350, and 147.555 MHz.

Bulletins are sent using 45.45-baud Baudot, PSK31 in BPSK mode, and MFSK16 on a daily revolving schedule.

Keplerian elements for many amateur satellites will be sent on the regular digital frequencies on Tuesdays and Fridays at 6:30 PM Eastern time using Baudot and PSK31.

♦ Voicetransmissions: Frequencies are 1.855, 3.99, 7.29, 14.29, 18.16, 21.39, 28.59, 50.350, and 147.555 MHz. Voice transmissions on 7.290 MHz are in AM double sideband, full carrier.

♦ Notes: On Fridays, UTC, a DX bulletin replaces the regular bulletins. W1AW is open to visitors 10 AM to 3:45 PM Monday through Friday. FCC-licensed amateurs may operate the station during that time. Be sure to bring a reference copy of your current FCC amateur license. In a communication emergency, monitor W1AW for special bulletins as follows: voice on the hour, teleprinter at 15 minutes past the hour, and CW on the half hour.

W1AW code practice and CW/digital/phone bulletin transmission audio is also available real-time via the *EchoLink Conference Server* W1AWBDCT. The conference server runs concurrently with the regularly scheduled station transmissions. The W1AW Qualifying Run texts can also be copied via the EchoLink Conference Server.

During 2024, Headquarters and W1AW are closed on New Year's Day (January 1), Presidents Day (February 19), Memorial Day (May 27), Independence Day (July 4), Labor Day (September 2), Veterans Day (November 11), Thanksgiving and the following day (November 28 and 29), and Christmas Day (December 25).



KENWOOD

3rd IMDR 110 dB*

RMDR 122 dB*

BDR 150 dB*

Performance Exceeding Expectations.

The most happy and sublime encounters happen in the worst circumstances and under the harshest conditions.

There are enthusiasts who know this all too well because of their love of HF radio.

Results born of certainty and not circumstance. Delivered through impeccable performance. This is our offering to you.



"The Kenwood TS-890S has the highest RMDR of any radio I have ever measured."

- Rob Sherwood - NCOB - December 2018

HF/50MHz TRANSCEIVER TS-890S

Top-class receiving performance

3 kinds of dynamic range make for top-class performance.

- ▶ Third order intermodulation Dynamic Range (3rd IMDR) 110dB*
- ▶ Reciprocal Mixing Dynamic Range (RMDR) 122dB*
- ▶ Blocking Dynamic Range (BDR) 150dB*

*Values are measured examples. (2kHz spacing: 14.1 MHz, CW, BW 500 Hz, Pre Amp OFF)

- ▶ Full Down Conversion RX
- ▶ High Carrier to Noise Ratio 1st LO
- ▶ H-mode mixer

4 kinds of built-in roofing filters

500Hz / 2.7kHz / 6kHz / 15kHz (270Hz Option)

7 inch Color TFT Display

- ▶ Roofing frequency sampling band scope
- ▶ Band scope auto-scroll mode
- ▶ Multi-information display including filter scope

Clean and tough 100W output

Built-in high-speed automatic antenna tuner

32-bit floating-point DSP for RX / TX and Bandscope

*: 2 kHz spacing measurement standard - Receiver frequency 14.2 MHz, MODE CW, BW 500 Hz, PRE AMP OFF

Customer Support: (310) 639-4200


www.kenwood.com/usa



ADS#16221

Using the tinySA Ultra Spectrum Analyzer to Solve Amateur Radio and OTA TV Problems



Expanded applications for a useful device.

The 0.2 – 1500 MHz noise source and filter connected to the tinySA Ultra.

Phil Salas, AD5X

I reviewed the \$130 tinySA Ultra 6 GHz spectrum analyzer for Product Review in the April 2023 issue. In this article, I discuss expanding the use of this inexpensive spectrum analyzer by solving ham and non-ham problems.

Filter Response and Return Loss Measurements

Besides the spectral monitoring functions of the tinySA Ultra, it can also help you look at filter response and return loss. I first noted these techniques in my Rigol DSA705 review (see Product Review, July 2017). Now that some of the necessary equipment is different or less expensive, I'd like to revisit those techniques. For filter response and return loss measurements, you will need a broadband noise source. The lead image shows an aluminum box containing a 0.2 – 1500 MHz noise source that I purchased from Amazon for less than \$20. Its output is essentially flat out to 800 MHz — my main area of interest. The noise source itself can be seen in Figure 1. Using this noise source with the tinySA Ultra's internal attenuator set

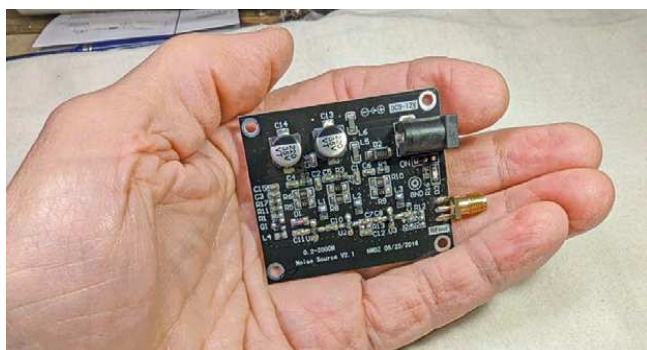


Figure 1 — The 0.2 – 1500 MHz noise source. [Phil Salas, AD5X, photo]

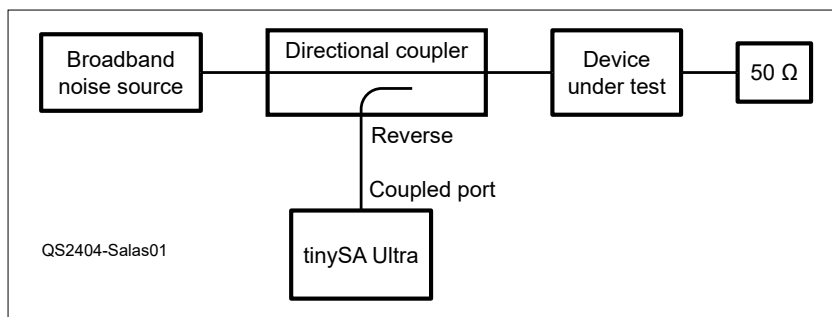


Figure 2 — A diagram depicting the use of a directional coupler to measure return loss.

tinySA Tips

When using a noise source for through and return loss measurements, the plot will be “noisy” rather than smooth. The **DISPLAY/CALC/AVER4** or **AVER16** features will smooth the plot and make it easier to read. These averaging features are slow to update, so when adjusting a filter, don’t use averaging until the adjustments are done.

Use the **NORMALIZE** feature to directly display the difference between the smoothed level from the noise generator and the output of a network. This makes it much easier to read the actual value of network loss.

To measure return loss, put a short or open on the output of the directional coupler to generate the reference curve, and then smooth it and use the **NORMALIZE** feature to read the actual return loss, which will be directly displayed in dB.

For accurate results, use external or built-in tinySA attenuators as needed to prevent overloading. Visit www.arrl.org/qst-in-depth for more information about checking for overload with a noise source. — *John Stanley, K4ERO*

to 11 dB and an external 10 dB attenuator, the reference noise level is about –30 to –35 dBm when using the default 850 kHz video bandwidth. To look at a filter’s passband frequency response, simply place the filter between the broadband noise source and the tinySA Ultra spectrum analyzer. See the sidebar, “tinySA Tips,” for the best tinySA settings to use and precautions to take when looking at the passband frequency response.

To measure return loss, you must purchase a directional coupler. Mini-Circuits ZFDC-series directional couplers are inexpensive on eBay; I use a ZFDC-20-4+ because it covers 1 – 1000 MHz. Figure 2 is a block diagram of the return loss measurement setup. To make the measurement, replace the device under test with a short circuit to set your 0 dB reference. Normalize and then connect the device to test, and terminate it in 50 Ω if it is a through device, such as a filter. The return loss will directly read in dB, although the tinySA will label it as dBm.

Solving a Second Harmonic Problem

For my first task, I needed to solve an FCC issue with a 6-meter transverter. For transmitters that run less than 25 W on any frequency from 30 to 225 MHz, the FCC requires all harmonic and out-of-band spurious signals to be greater than 40 dB below the main signal. The transverter’s second harmonic fell short of the

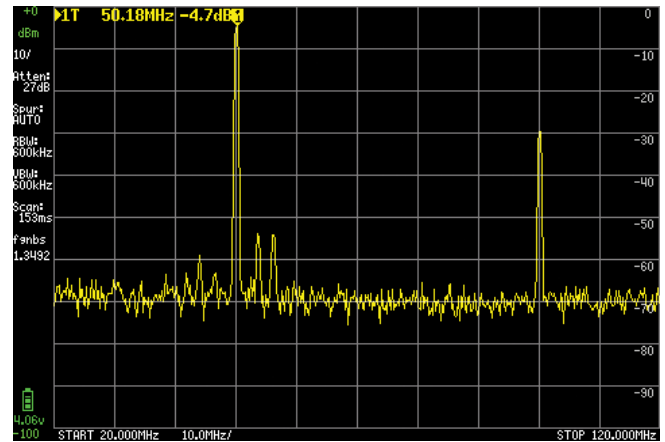


Figure 3 — The transverter’s second harmonic is only about 25 dB below the main signal.

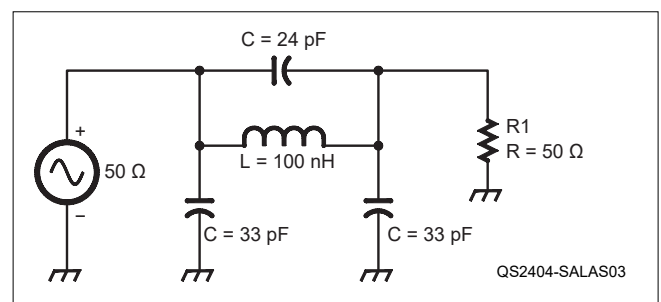


Figure 4 — A schematic of the Cauer low-pass filter.

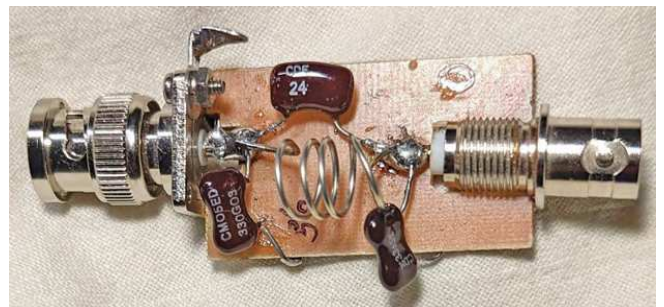


Figure 5 — The Cauer low-pass filter. [Phil Salas, AD5X, photo]

FCC requirement by about 15 dB. Figure 3 shows the tinySA Ultra’s spectral display of the transverter output.

I designed a Cauer low-pass filter with the notch at 100 MHz (see Figures 4 and 5). By using the noise source method, I was able to easily tune the inductor (stretching and squeezing) for the correct response (see Figure 6). With the filter in line, the second harmonic now meets the FCC requirements (see Figure 7). I also measured the filter’s input return loss using the reverse coupler method to ensure that it was rea-

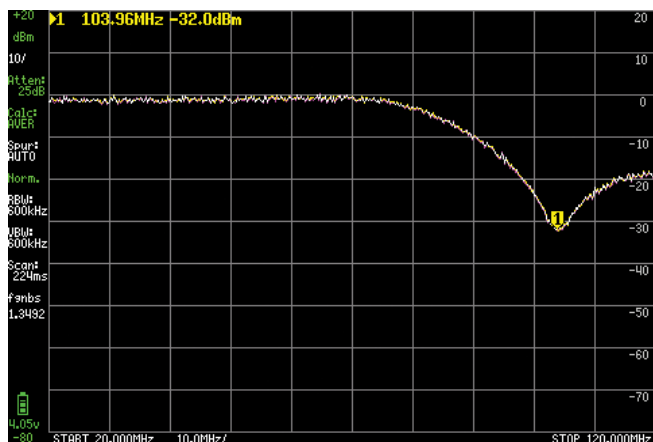


Figure 6 — The Cauer low-pass filter's response.

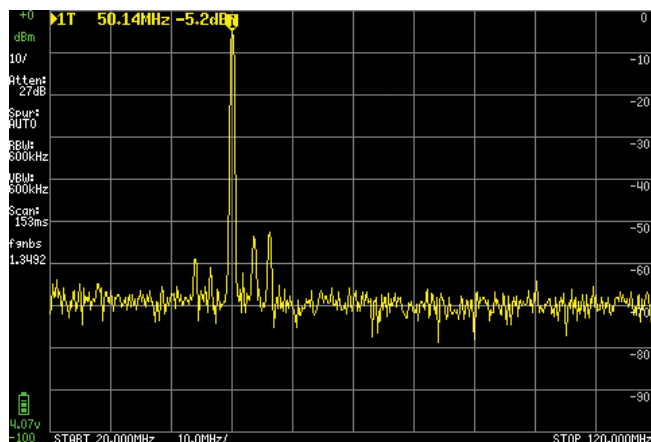


Figure 7 — The filtered transverter's output.

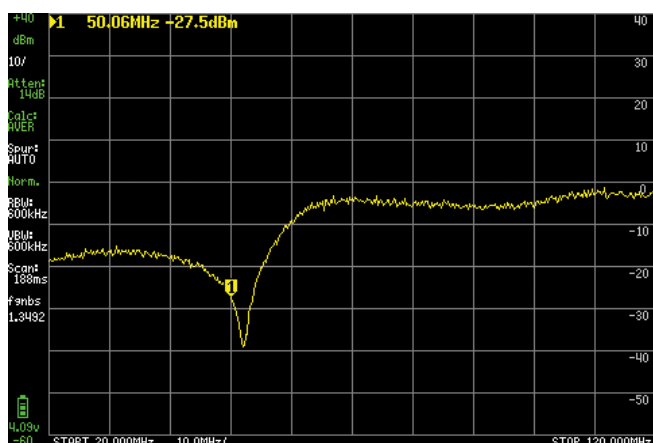


Figure 8 — The terminated filter's return loss.

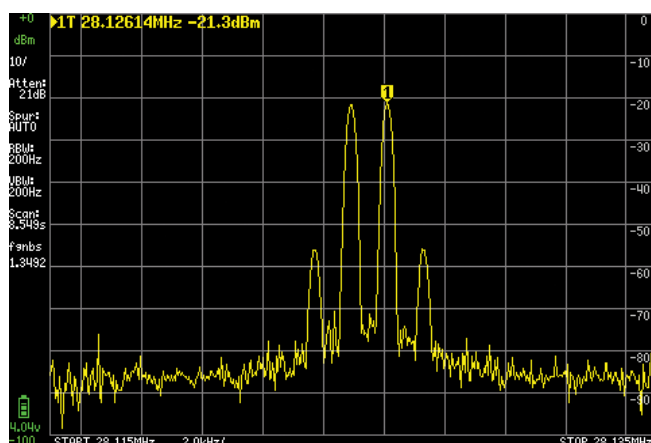


Figure 9 — The 10-meter two-tone transverter's input.

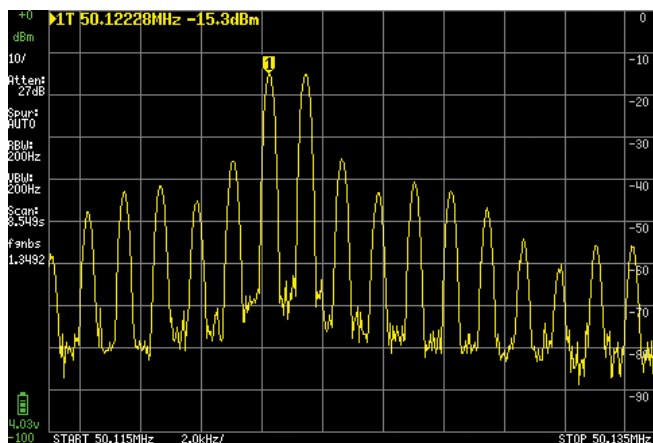


Figure 10 — The resultant 6-meter two-tone spectrum.

sonable, too. Figure 8 shows the terminated filter's return loss normalized to the return loss with the coupler feeding into a 0 dB return loss (short). It reads 27.5 dB of return loss at 50 MHz (the standing wave ratio is less than 1.1:1).

Measuring IMD Performance

After taking care of the FCC issue, I wanted to measure two-tone intermodulation distortion (IMD) performance. My Siglent SDG1062X dual-output signal generator permits combining two outputs. So, I set two frequencies on 10 meters, each 1200 Hz apart (per ARRL Lab test requirements), and then I fed the combined signals to a broadband amplifier to get the necessary transverter driving power level. Figure 9 shows the 28 MHz two-tone spectrum. As you can see, the results are desirable. The second-order products are 35 dB below the two primary tones, and the higher-level products are almost nonexistent. Figure 10 shows the resultant 50 MHz two-tone spectrum at 5 W output power. Here, the second-order products are about 20 dB below the two primary tones. This is actually 26 dBc, as the ARRL

Table 1 — XG3 versus tinySA Ultra Signal Levels as Measured on a Siglent SSA3021X Spectrum Analyzer

Band (meters)	XG3 at -73 dBm	tinySA at -73 dBm	XG3 at -107 dBm	tinySA at -107 dBm
80	-75 dBm	-74 dBm	-107 dBm	-107 dBm
40	-75 dBm	-74 dBm	-107 dBm	-107 dBm
20	-75 dBm	-74 dBm	-110 dBm	-107 dBm
10	-75 dBm	-74 dBm	-110 dBm	-107 dBm
6	-76 dBm	-74 dBm	-110 dBm	-107 dBm
2	-77 dBm	-73 dBm	-110 dBm	-107 dBm

Table 2 — Common OTA Channels in the Dallas Area

Channel	Old Channel No.	Digital Channel No.	Frequency (MHz)
FOX 4 KDFW	4.1	35	596 – 602
H&I	4.3	35	596 – 602
Get TV	4.4	35	596 – 602
NBC KXAS	5.1	24	530 – 536
COZI	5.2	24	530 – 536
ABC WFAA	8.1	8	180 – 186
CBS KTVT	11.1	19	500 – 506
PBS KERA	13.1	14	470 – 476
21 KXTA	21.1	18	494 – 500
Movies KDFI	27.2	27	548 – 554
CW33 KDAF	33.1	32	578 – 584
Comet KTXD	47.2	23	524 – 530
Grit KSTR	49.3	34	590 – 596
MeTV KAZD	55.1	31	572 – 578
Decades KAZD	55.6	31	572 – 578
Grit KPXD	68.3	25	536 – 542
ION KPXD	68.1	25	536 – 542

Lab measures distortion products. This result isn't terrible, as it is not much different than that of many transceivers on the market. The concern is that the higher-order products don't quickly roll off. I would feel comfortable running this transverter at 5 W, but I wouldn't suggest using an amplifier with it. I verified this spectrum by adding additional attenuation to avoid overloading the tinySA.

Using the tinySA Ultra Signal Generator

You can select the tinySA Ultra's signal generator function with the **MODE** menu. Any frequency or level can easily be set. An accurate signal generator can effectively measure receiver sensitivity, so I compared the tinySA Ultra to my Elecraft XG3 generator. I measured the levels on my Siglent SSA3021X spectrum analyzer, which has National Institute of Standards and Technology-traceable calibration. The results are shown in Table 1. As you can see, the tinySA Ultra's output level settings are highly accurate.

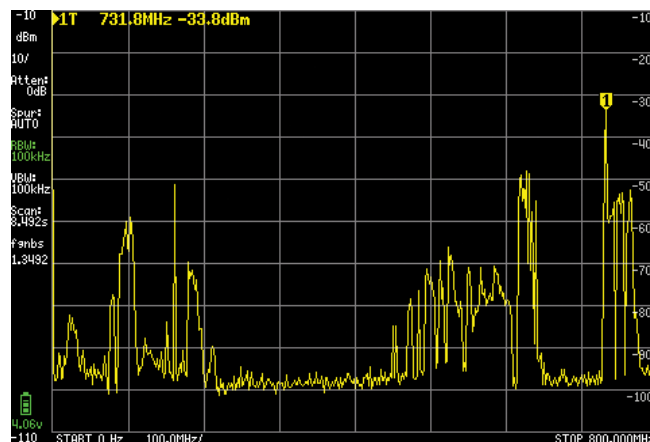


Figure 11 — The tinySA Ultra 0 – 800 MHz spectrum at the TV antenna feed.

A Non-Ham tinySA Ultra Application

Consider some over-the-air (OTA) TV basics; a North American 6 MHz TV RF channel can contain up to seven eight-level vestigial sideband-modulated ATSC (Advanced Television Systems Committee) TV channels, depending on the mix of high- and standard-definition channels. Typically, the main channel is high-definition, and the others are standard-definition. Table 2 lists some common OTA channels in the Dallas, Texas, area. Notice that ABC is VHF (180 – 186 MHz). All other channels are UHF (470 – 602 MHz). While the channel numbers are similar to the original analog TV channel numbers, in most cases, the frequencies have been changed. For example, the old analog FOX 4 KDFW TV channel was in the range of 66 – 72 MHz. However, while it is still Channel 4, the new digital FOX 4 KDFW TV channels (4.1 – 4.4) have been moved to 596 – 602 MHz (digital Channel 35). You can obtain the specific channel frequencies for any area at www.fcc.gov or other online resources. Incidentally, frequencies from 608 to 800 MHz have been transferred to 4G Long-Term Evolution (LTE) and 5G cellular service providers.

I wanted to receive local OTA TV stations, but my eight-way amplified splitter was being overloaded by local FM, as well as 4G and 5G transmissions. I had a lot of pixelation on several desired channels, and there was frequent loss of synchronization. In order to better understand what was going on, I took the tinySA Ultra into my attic and connected it directly to the TV antenna feed. Figure 11 shows the 0 – 800 MHz spectrum observed. You can see the 180 – 186 MHz TV channel and the rest of the TV channels from 470 to 608 MHz. The strong signal at 162 MHz is a National Oceanic

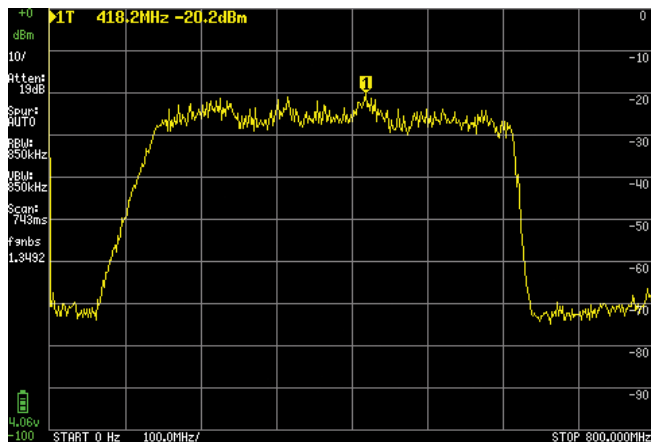


Figure 12 — The response when both of the filters shown are used in series.

and Atmospheric Administration Weather Radio transmitter. The FM broadcast signals are visible from 88 to 108 MHz. There is a strong signal just above 600 MHz, and there are several more from about 750 to 800 MHz. Some of these are probably 4G LTE or 5G signals from the AT&T cell tower located a few blocks away and directly in my TV antenna's main pattern. There are other strong signals from 700 to 800 MHz. Most of the non-TV signals are 10 – 40 dB higher than the TV signals; because the active splitter amplifies signals from 50 to 1000 MHz, all of the non-TV signals are amplified along with the desired TV signals. This can cause amplifier overload, TV front-end overload, or IMD products falling within the TV channels. Such IMD can happen when non-linearities from strong non-TV signals mix with each other and/or the TV signals.

So, what can be done? If I find a way to reduce the level of out-of-band undesired signals, it might help solve the pixelation and loss of synchronization. Amazon sells a variety of inexpensive LTE filters. I ordered several for analysis, but most of them were of poor quality. However, while the KBFUSHI filter shown in Figure 12 didn't have much attenuation above 600 MHz, it turned out to be an excellent FM broadcast and HF filter. It has 3 dB of attenuation at


148 MHz, 21 dB of attenuation at 108 MHz, and 30 – 50 dB of attenuation below 50 MHz. Besides helping attenuate the FM broadcast stations, this filter will help eliminate HF front-end overload of my TV system from nearby ham transmitters.

I still needed a good LTE band filter; after further investigation, I found that the Channel Master CM-3201 had good attenuation characteristics above 600 MHz, but no attenuation below 150 MHz. That is, it was strictly a low-pass filter. My final solution was to put the KBFUSHI high-pass filter in series with the Channel Master CM-3201 low-pass filter. The combined band-pass response of the two filters is shown in Figure 12. This dual-filter configuration prevented out-of-band signals from having greater signal strengths than the desired TV signals. This completely resolved my OTA TV problems. This process, and the results, are covered in more detail at www.arrl.org/qst-in-depth.

See QST in Depth for More!

Visit www.arrl.org/qst-in-depth for the following supplementary materials and updates:

- ✓ More information on checking for overload with a noise source
- ✓ Additional details about applying filters to solve the OTA TV problem

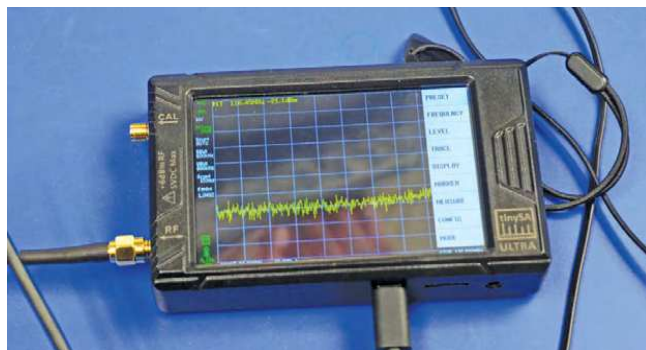

Click here to watch ARRL Lab Digital RF Engineer John McAuliffe, KD2ZWN, use the TinySA Ultra to measure the corner frequency and return loss of an RF filter.


Phil Salas, AD5X, an ARRL Life Member, has been licensed continuously since 1964. His interest in ham radio led him to pursue BSEE and MSEE degrees from Virginia Tech and Southern Methodist University, respectively, followed by a 35-year career in UHF, microwave, and lightwave design and management. Now fully retired, Phil enjoys tinkering with ham radio projects and spending time with his two grandsons. He can be reached at ad5x@arrl.net.

For updates to this article, see the **QST Feedback** page at www.arrl.org/feedback.



A Modest 20- to 10-Meter LPDA

This log-periodic dipole array is constructed on a 21.2-foot boom.

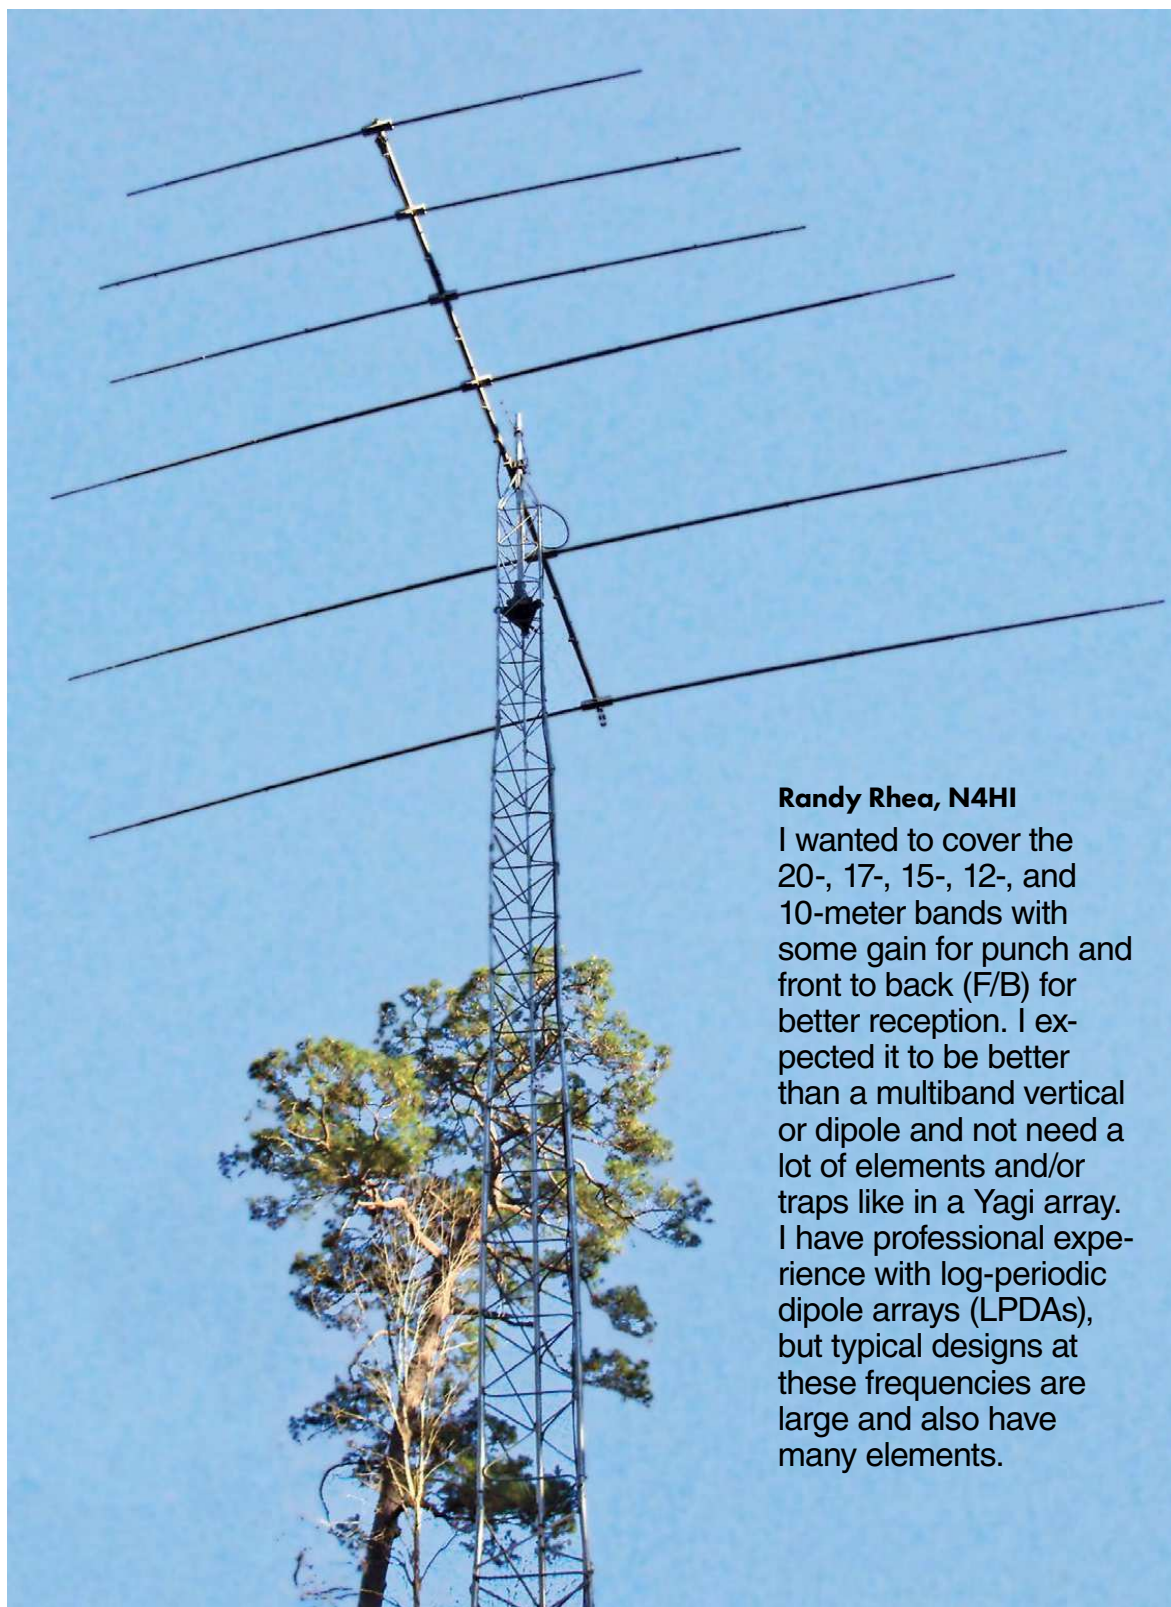

Randy Rhea, N4HI


I wanted to cover the 20-, 17-, 15-, 12-, and 10-meter bands with some gain for punch and front to back (F/B) for better reception. I expected it to be better than a multiband vertical or dipole and not need a lot of elements and/or traps like in a Yagi array. I have professional experience with log-periodic dipole arrays (LPDAs), but typical designs at these frequencies are large and also have many elements.

Only about 2 MHz of total frequency coverage was needed in a 15 MHz span from 14 to 29 MHz, so I wondered if a conventional LPDA could be optimized for the ham bands by sacrificing the non-ham frequencies to obtain reasonable performance on a limited boom. I explored designs using *EZNEC* and optimized them using *AutoEZ*.

My goal was to achieve the best-possible performance with my old 24-foot Hy-Gain TH6DX boom. I planned to use any aluminum that I could from the TH6DX and purchase the rest.

Initial Results

The simulation revealed that reasonable performance could be achieved on a 24-foot boom with just six elements. The structure deviated from true log-periodic geometry after optimization for gain, F/B, and standing wave ratio (SWR). The long rear elements resulted in an unbalanced weight. Because the boom-to-mast clamp of the TH6DX also joined the two 12-foot boom segments, to balance the antenna at the clamp, I cut 32.5 inches off the rear boom — I now had a 21.29-foot boom. Fortunately, the simulated performance

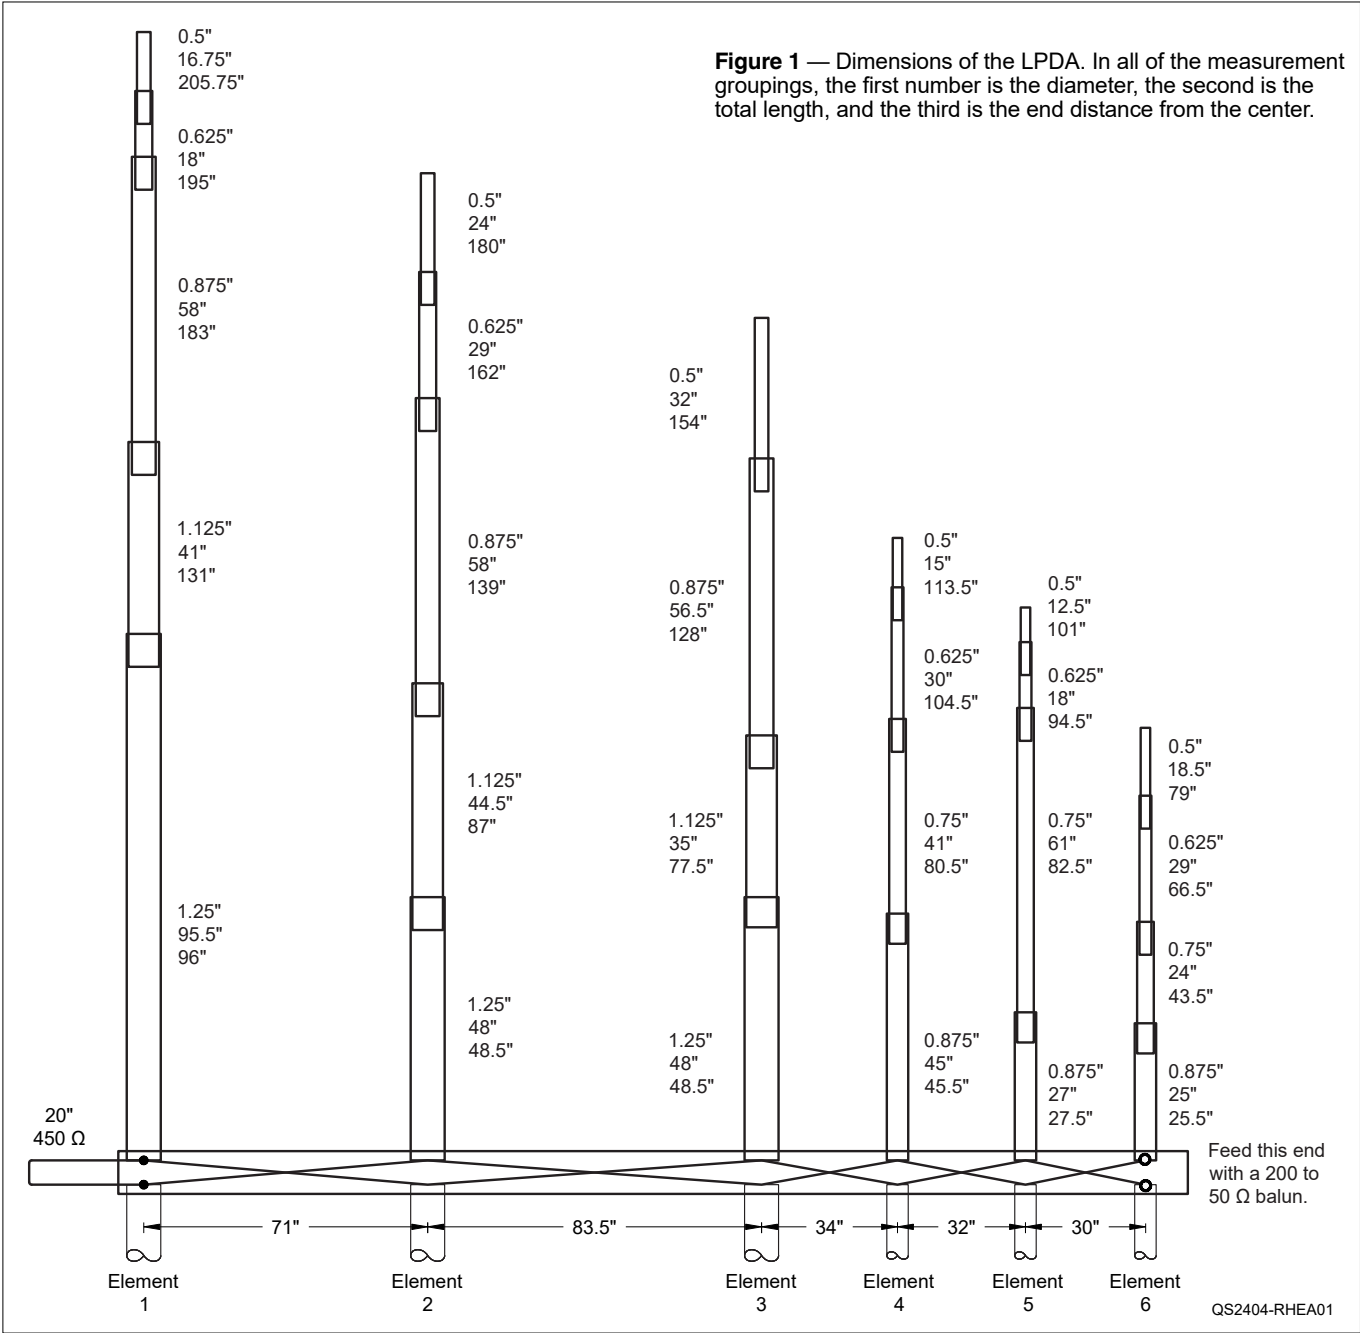

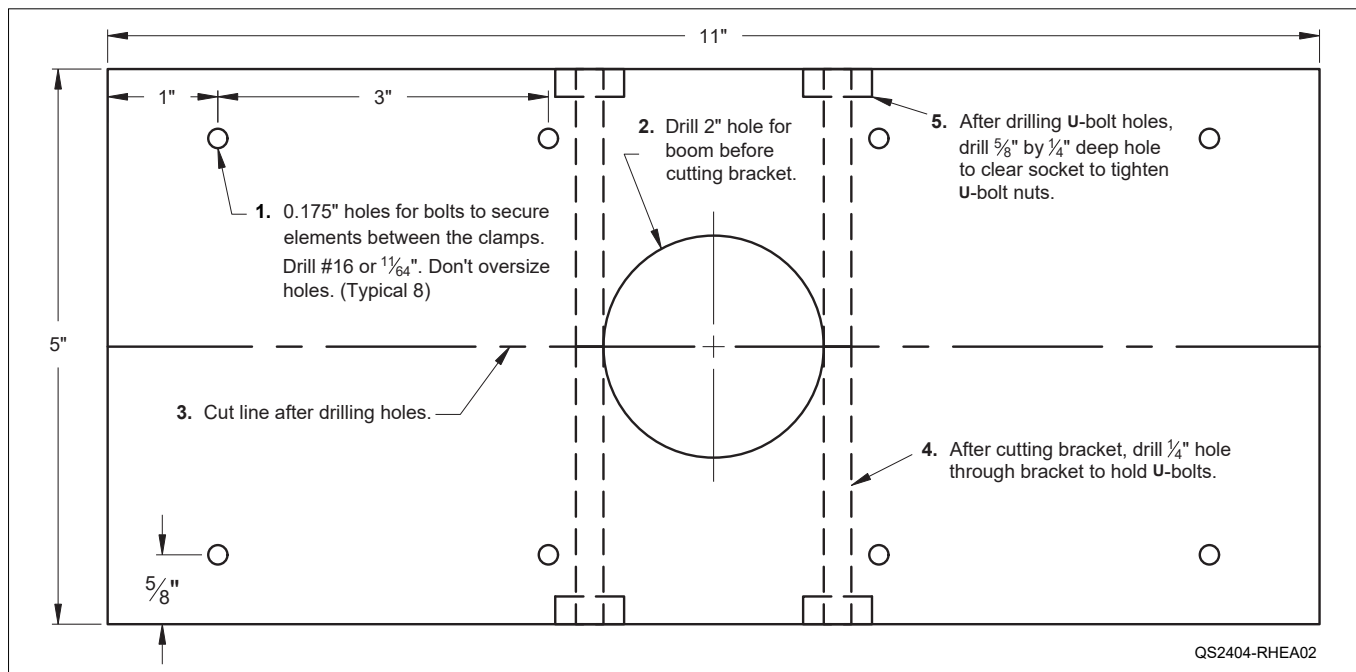


Figure 2 — The boom-to-element bracket. Observe the order of the construction steps.

was still good. The lead photo shows the final LPDA at the top of a self-supporting aluminum tower.

Antenna Construction

Figure 1 shows the spacing and design of each of the elements. The element lengths and spacings are not quite log periodic, which allowed me to optimize the design for good performance with a shorter boom and fewer elements.

Maximizing the use of aluminum from my old TH6DX dictated the unusual element taper. While most homebrewers will likely purchase aluminum rather than salvaging what they can, I recommend using these element tapers; a more conventional taper would change the resonant frequency of the elements, and this is a proven design. The TH6DX has some elements with swaged ends, resulting in steps larger than 0.125 inch. I recommend using sleeves made of short tubing lengths to create 0.250-inch steps where necessary. I used 6 inches of overlap to join the tubes.

LPDA antennas drive each element with a balanced transmission line and thus require that the elements be insulated from the boom. I homebrewed the element-to-boom brackets using 0.75- × 5.5-inch PVC trim boards from a local box store. Figure 2 shows the dimensions for constructing the brackets. Cut the board into 11-inch lengths and then rip 0.5 inch from the width of each cut piece. The center 2-inch hole is drilled before ripping the PVC into two brackets. Next,

drill the U-bolt holes. Sandwich each element between two brackets and secure them with two 10-32 bolts. The four holes in each bracket and element should fit the bolt tightly so the elements don't droop. (If I were to redo mine, I would raise the outer holes by $\frac{1}{32}$ inch to slightly pre-tilt the elements upward.) Space the ends of the left and right elements about 1 inch apart at the boom, and use U-bolts to attach the brackets to the boom. Make sure the elements don't contact the boom U-bolts, which would short the elements to the boom.

The LPDA Feed Line

Each LPDA element is fed with a balanced twinlead transmission line with an inverted phase for each element. This is done by twisting the twinlead between each element, or simply crossing the short jumper wires that connect the twinlead to the elements.

The parameters of the LPDA determine the required characteristic impedance of the feed line. In this design, a 200 Ω driving-point impedance is achieved with 250 Ω twinlead. Because this is not a commercially available twinlead impedance, I constructed the line using #8 AWG bare copper wire spaced 0.51 inch center to center. Remove any kinks in the unrolled bare wire by clamping one end in a vice and pulling hard on the other end to slightly stretch the wire. Using short pieces of the ripped PVC board, drill 0.51-inch holes center to center to serve as small spacers roughly 2 feet apart along the feed line. Screw these spacers to the element brackets to stabilize the feed



Figure 3 — The boom-to-element bracket with the feed-line spacer supported on standoffs. Just visible behind the spacer are the crossed wire jumpers from the antenna elements to the feed line.

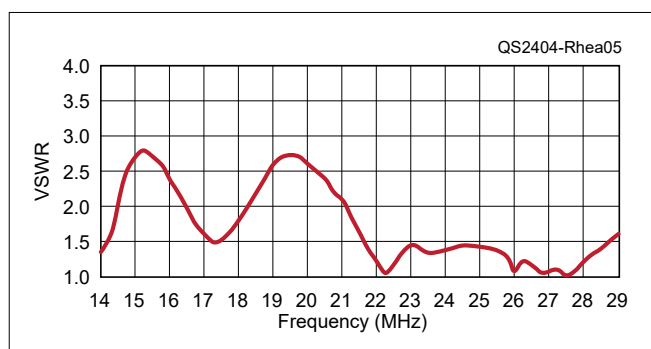


Figure 4 — VSWR of the LPDA through TMR-400 coax at the tower base.

line at the brackets. The bracket for element two and the feed line are pictured in Figure 3.

I homebrewed a 200 to 50 Ω balun to feed the dipole array at the high-frequency end of the LPDA. Your balun design can be verified using a 200 Ω resistor across the balanced terminals and measuring the SWR on the 50 Ω port. It should be better than 1.5:1, preferably 1.2:1. Some commercial baluns are not that good.

Element one serves as a reflector. To reduce its required length, use a 20-inch section of commercial 450 Ω ladder line to short the element.

Simulated Patterns and Measured VSWR

On the QST in Depth web page (www.arrl.org/qst-in-depth) you'll find the EZNEC-simulated azimuth patterns for the CW segment of each band. Each pattern is cut at the indicated optimum elevation angle for each band with the antenna mounted at 50 feet. The patterns in the phone portions are similar because of the

broadband nature of LPDAs. The gain ranges from 10.5 to 11.3 dBi, and the F/B ranges from 10 to 15 dB.

Figure 4 shows the VSWR at the base of the tower with the LPDA fed through foam LMR-400-type coaxial cable, measured using a RigExpert AA-35 Zoom vector network analyzer.

On-Air Performance

I've been using my LPDA since May 2020, and it has survived 60 mph winds. I've used it on all five bands with my IC-7300 without a tuner. It demonstrates good F/B and signals peak well on beam. I operate exclusively HF CW, and I used it to extend my barefoot DXCC from 274 to 288 countries.

See QST in Depth for More!

Visit www.arrl.org/qst-in-depth for the following supplementary materials and updates:

- ✓ EZNEC-simulated azimuth patterns of the LPDA at the peak elevation angle of each band.



Click here to watch a video of Randy Rhea, N4HI, share why he wanted to build this project.

All photos provided by the author.

Randy Rhea, N4HI, was first licensed in 1962 as WN9FFO and has held the call signs WA7NLA and WB4KSS. He worked as an electrical engineer at Boeing, Goodyear Aerospace, and Scientific Atlanta. In 1985, he founded Circuit Busters (now known as Eagleware), which was acquired by Keysight in 2005. The Eagleware RF/microwave software design suite *Genesys* is still supported by Keysight and used by thousands of engineers worldwide. Randy is the author of five engineering reference books covering oscillators and filters, and he exclusively operates HF CW. Randy is married and has two children and five grandchildren. He can be reached at randy.rhea@gmail.com.

For updates to this article, see the QST Feedback page at www.arrl.org/feedback.



Product Review

ACOM 500S 160 – 4-Meter Linear Amplifier

Reviewed by Mark Wilson, K1RO
k1ro@arrl.net

ACOM's product line includes a wide variety of solid-state and tube-type amplifiers with RF output levels up to the 1500 W legal limit. Over the past 20 or so years, Bulgarian manufacturers' products have developed a reputation for quiet, reliable operation, and QST has reviewed many of their products. ACOM's latest offering, the 500S, uses solid-state technology to deliver 500 W from 160 through 4 meters (the 70 MHz band, available to amateurs in some countries outside North America).

Amplifiers in this power class have long been popular. They offer a 7 dB (more than 1 S-unit) improvement in signal strength compared with a 100 W transceiver, and are significantly less expensive than full-power models. Modern 500 W solid-state amplifiers such as the ACOM 500S are easy to operate. They switch bands automatically and require no tuning. Extensive protection circuitry helps keep them safe in case of operator error or failure in another part of the station (such as a broken feed line).

Documentation

The ACOM 500S does not include a printed manual, but a 66-page PDF manual is available online. The manual includes many color illustrations and covers installation, hookup, operation, remote control, maintenance, and troubleshooting. Other support files and firmware updates are available from ACOM's website.

I liked the **HELP** button available on most of the menu screens. That brought up information that answered most of my questions without having to consult the manual.

Overview

The ACOM 500S measures 6.2 × 11.5 × 10.7 inches (height, width, depth) and weighs just 17 pounds. You could easily take it along for a DXpedition or portable operation in addition to home station use. The 500S can operate with 100 to 240 V ac and requires 25 to



45 W of RF drive power depending on the band (see Table 1), and will deliver 500 W into a standing wave ratio (SWR) below 1.5:1. Output power folds back as SWR rises above 1.5:1. ACOM offers two optional antenna-matching units that integrate with the 500S and other ACOM solid-state amps. The 04AT can be mounted indoors or outdoors, while the 06AT is a desktop unit with styling that matches the amplifier.

The **ON/OFF** rocker switch on the rear panel controls ac to the power supply input and is left on to keep the amplifier in a low-energy standby mode when not in use. Pressing the front-panel **POWER** button for a few seconds begins the amplifier's start-up routine and turns on the display. After about 10 seconds, the 500S is ready for operation. Pressing the front-panel **POWER** button again returns the amplifier to the low-energy standby mode.

The 500S shares a simple front-panel design with other ACOM solid-state amplifiers. Control, metering, and monitoring functions are handled by a 5-inch color screen with six pushbuttons below (see Figure 1). On-screen labels for the pushbuttons are context sensitive and change depending on what you're doing. During normal operation, the screen shows the

Bottom Line

The ACOM 500S solid-state linear amplifier operates from 160 through 4 meters and easily provides 500 W output with 25 to 45 W of drive. It's compact and easy to operate.

Table 1**ACOM 500S, serial number 230136, firmware v1.0****Manufacturer's Specifications**

Frequency range: All amateur frequencies in the range of 1.8 to 70.5 MHz.

Primary power requirements: 100 to 240 V ac.

Power output: 500 W $\pm$ 0.5 dB PEP or continuous carrier with no mode limitations.

Driving power required: Typically, 45 W for 500 W RF output.

Spurious and harmonic suppression:

Below 30 MHz >50 dBc, above 30 MHz >70 dBc below rated output.

Third-order intermodulation distortion (IMD): >30 below rated PEP.

Keying time: Unkey to key, 10 ms.

Size (height, width, depth): 6.2 $\times$ 11.5 $\times$ 10.7 inches.

Weight: 17.2 pounds.

*Reminder: US amateurs must observe a limit of 200 W PEP output on the 30-meter band.

Measured in the ARRL Lab

160, 80, 40, 30, 20, 17, 15, 12, 10, and 6 meters.*

As specified. Tested with 120 V ac supply.

As specified.

Drive level for 500 W output:

1.8 MHz, 41 W; 3.5 MHz, 35 W; 7 MHz, 42 W; 14 MHz, 45 W; 18.1 MHz, 46 W; 21 MHz, 25 W; 24.9 MHz, 30 W; 28 MHz, 41 W; 50 MHz, 45 W. See Figure A.

58 dB worst case band (10 meters); 67 dB, 6 meters.

Meets FCC requirements.

14 MHz, 3rd/5th/7th/9th:

At 500 W PEP: -35/-39/-62/-58 dB. See Figure B.

Unkey to key, 13.4 ms; key to unkey, 28 ms.

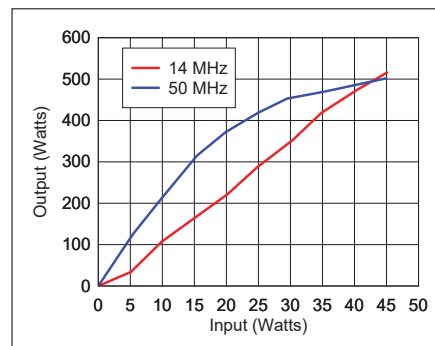


Figure A — ACOM 500S, RF power input versus RF output.

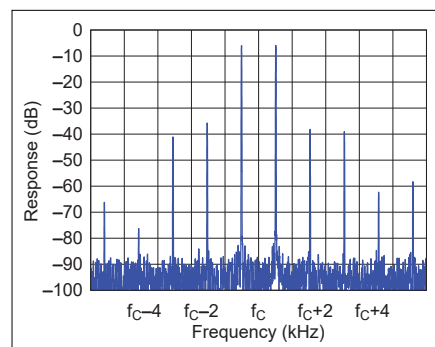


Figure B — ACOM 500S, the 20-meter band third-order IMD performance at 500 W.

band of operation, forward and reflected power, and power amplifier (PA) temperature as well as two additional user-selected parameters in the yellow bar above the frequency band display.

The yellow bar below the frequency band section indicates **OPERATE**, **STANDBY**, or **AUTO OPERATE** mode, transmit-receive relay status, whether or not the amplifier operating frequency is set to follow the transceiver (**CAT/AUX CONTROL**), and if the amplifier is under remote control.

When you turn on the amplifier, it goes into the **STANDBY** mode. Press the **OPR/STB** button to switch it to **OPERATE**. If you select **AUTO OPERATE** from the **USER PREFERENCES** menu, the amplifier goes into **OPERATE** mode when you turn it on.

Pressing the **MENU** button brings up a list of screens for monitoring or changing amplifier operation, as shown in Figure 2. The **AMP MEASURE** menu shown in Figure 3 selects the two user-selectable parameters shown on-screen. Choices include input or output power, forward or reflected power, SWR, amplifier gain, PA bias, PA voltage, or PA current. The **AMP SERVICE** menu is used to check the drain current of the PA transistors and to test relay and fan operation.

The **CAT/AUX SETTINGS** menu is used to set up the amplifier to interface with a transceiver via band data or RS-232. The manual includes settings for transceivers from Elecraft, Icom, Kenwood, and Yaesu. Note that the 500S will switch bands automatically when it senses RF at the input, but the CAT connection ensures that the ampli-

fier follows your radio and is always set to the correct band before you start transmission. Transceiver interface cables are available from DX Engineering (ACOM's US distributor), or you can consult documentation from ACOM's website to make your own.

In addition to the **AUTO OPERATE** feature described previously, the **USER PREFERENCES** menu controls beep volume and display brightness. It's also used to add your call sign or other text to the message displayed at start-up. The **FAULTS LOG** menu displays information such as amplifier serial number, hardware and firmware versions, and total hours of operation. Along the bottom of the screen is information that can be used for troubleshooting in the event of an amplifier

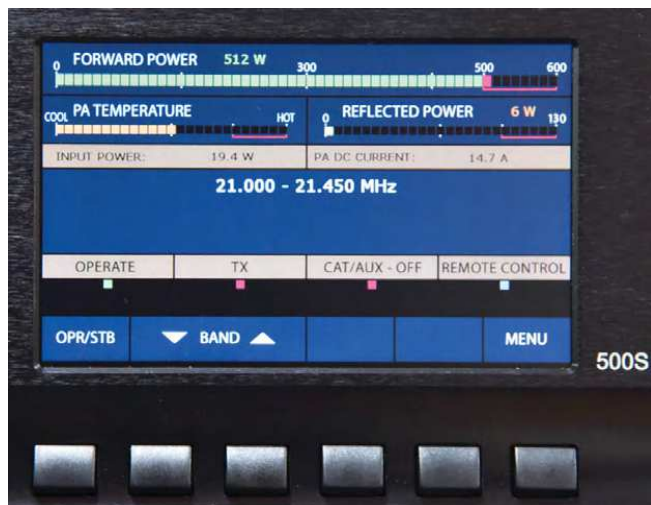


Figure 1 — The main operating screen shows important operating parameters such as selected band, forward and reflected power, drive power, and PA temperature. It's not a touchscreen — selections are made using the buttons below the screen. The **MENU** button at the lower right brings up various setup and monitoring screens.

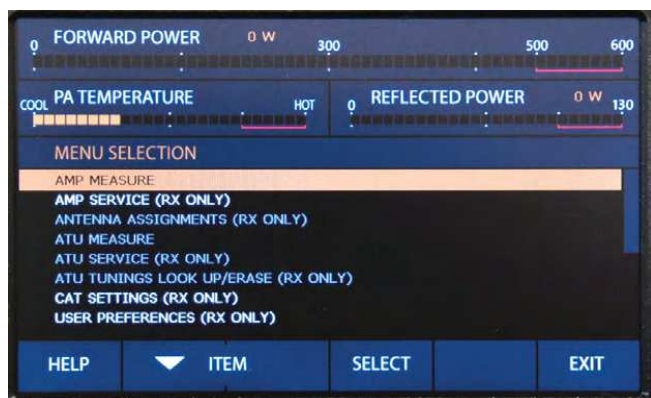


Figure 2 — The **MENU** screen is used to set up the amplifier. Several of the screen selections are not active without an ACOM automatic antenna tuner connected.



Figure 3 — The **AMP MEASURE** screen is used to select the parameters displayed in the bar just above the band display.

fault. Using the **RESTORE DEFAULT SETTINGS** menu, you can restore the amplifier's factory settings, reset the user preferences to default values, erase the faults log, or reset the hours counter.

Protection Features

The 500S incorporates an automatic protection system similar to other ACOM solid-state amplifiers. The control unit monitors drive frequency and power, transmit-receive (TR) relay switching times, final transistor drain voltage and current, gate bias voltage, power supply temperature, heatsink temperature, forward and reflected output power, and other parameters.

If a monitored value approaches the protection threshold, a clear warning message appears on the screen in a yellow bar above the **BAND** and **OPR/STB** buttons below the frequency display. If you correct the problem (for example, lower the drive level), then the warning goes away. The next level is a "soft fault" where the amplifier switches to standby and displays a detailed error message. If **AUTO OPERATE** is active, the amplifier will stay in standby for 4 seconds before returning to operation. It will return to standby if the problem is not corrected.

The most serious problems trigger a "hard fault," which shuts off the main power supply, stores data about the fault in memory, blanks the front panel, and sounds a string of Morse code **F** characters. After a hard fault, the amplifier may or may not power up again depending on the problem. If it does, a fault message appears on the screen. In the event of a hard fault, the amplifier stores diagnostic data that may assist with troubleshooting.

Setting Up the 500S

The power supply can operate from 85 to 132 V ac with 10 A fuses, or 170 to 265 V ac with 6.3 A fuses. The ac line fuse holders are on the rear panel. Just install the correct power plug for your station, make sure the right fuses are installed, and plug it in — no jumpers or switches are needed to select the ac mains voltage. The review amplifier came with fuses and a plug for 120 V operation installed. I had no problem operating it from a standard household 120 V, 15 A circuit in my station.

The rear panel (see Figure 4) has SO-239A jacks for the transceiver and antenna. If you have one of the matching ACOM automatic antenna tuners, use **RF OUTPUT 1**. Otherwise, use **RF OUTPUT 2**. There's a phono jack for TR switching (**KEY-IN**), 15-pin **CAT/AUX** connector for band data, and 9-pin **RS-232** connector.



Figure 4 — The rear panel, showing the cooling fan and available connections.

The **KEY-OUT** phono jack is for controlling a transmit inhibit function if one is available on your transceiver.

To switch bands, you can either connect an appropriate cable between your transceiver and the 500S, rely on the amplifier's built-in frequency counter, or use the **BAND UP/DOWN** buttons on the front panel.

We didn't order a compatible cable for this review, so I relied on the frequency counter. The amplifier will switch bands automatically when it senses RF at the input, but you need to make a brief transmission (such as a single CW character or voice syllable), then allow the amplifier to change bands. There is a slight switching delay, so you need to pause before resuming transmission. On digital modes such as FT8 or RTTY, the transmission is continuous (no convenient way to send a character or two and pause). If you don't pause until the band change is complete, there is no power output and a warning to remove drive power immediately flashes on the screen. For permanent installations, I highly recommend using a CAT cable so the amplifier follows the transceiver instantly at band changes.

The 500S has no automatic level control (ALC) connection to adjust transceiver drive power automatically. You need to adjust your transceiver's power output to drive the amplifier to 500 W without tripping the amplifier's overdrive protection. I found that the drive power varied from about 25 to 45 W depending on the band.

I didn't try it, but the 500S includes some remote control and monitoring features via the amplifier's RS-232 jack or ACOM's optional eBox Ethernet remote control device. You can turn the amplifier on and off, switch between operate and standby, switch

between transmit and receive, change bands, and adjust some of the options. More information is available from ACOM's website or the eBox manual.

Operation

According to the manual, the 500S will work into an SWR below 1.5:1 at full power, and that is sufficient for most of my antennas. Above 1.5:1, the power output folds back quickly. Although the 500S protection kicks in if the SWR is too high, in a number of places the manual stresses the importance of keeping the antenna system SWR under 1.5:1.

TR switching is relay-based, and the 500S doesn't offer full break-in (QSK) capability. Be sure to set your transceiver for a 14-millisecond or longer TR delay time to avoid potential damage to the amplifier from hot switching (applying RF before the amplifier relay contacts are fully closed).

The ACOM 500S is rated for 500 W continuous duty, so I used it while working weak DX stations on FT8/FT4 and also for a few hundred contacts in the CQ World Wide RTTY DX Contest. The PA temperature indicator stayed well within the safe range even during extended operating periods.

During receive periods, the amplifier cooling fans run at low speed. Fan speed increases as soon as the amplifier goes into transmit mode. During extended transmitting periods, especially when using digital modes, the fans run at higher speed all the time. While the fans are quieter than some high-power solid-state amplifiers I've used, they are not as quiet as my ACOM 1000 tube-type amplifier. I normally wear good headphones, so fan noise generally doesn't bother me.

Wrapping Up

ACOM's compact 500 W amplifier will find a spot in many stations where legal-limit power isn't desired or needed. Documentation is excellent, and the amplifier is simple to set up and use. Support is available from the factory in Bulgaria and from DX Engineering, the US distributor. ACOM amplifiers are also supported by user communities on <https://groups.io> and Facebook.

Manufacturer: ACOM Ltd., Sofia, Bulgaria, www.acom-bg.com. Available at US distributor DX Engineering. Price: \$3,400 without ac plug; \$3,475 with ac plug; transceiver interface cables, \$50.

W2IHY Multi-Switching System: 3 × 4 Switch Plus Controller, iPlus Audio Switch, and iBox Interface

*Reviewed by Pascal Villeneuve, VA2PV
va2pv@arrl.org*

This review includes many products offered by W2IHY Technologies. It's hard to understand the complete value of these products by reviewing them separately. So, this review consists of a solution using four W2IHY products: the 3 × 4 coax switch plus controller, the iPlus audio switch, the iBox audio interface, and the eight-band audio equalizer that was reviewed in the December 2000 issue of QST.



As soon as you have more than one HF radio and want to use it in the same station, you need to be careful if you want to keep the two connected and ready to use; otherwise, you may damage one of the receivers. You can use different radios on different bands/antennas using band-pass filters, or you can set up a switching solution to use them independently. That's what I did, as my radio usage depends on the operating modes, not the band. In June 2019, I posted on my personal YouTube channel a video about how I safely managed multiple HF radios in the same station. To view the video, titled "Safely connect several HF radios with multiple antennas," see <https://youtu.be/9FntelKOjoc?si=sb0PV4krwBRzkip3N>. This setup has served me well over the years, and I've never damaged anything, which is the most important. But it doesn't allow me to enjoy my different HF radios quickly. Yes, it protects my rigs from switching mistakes, but it takes too long to compare my radio performance in a particular situation. Although I can switch the coax, all radios have their own speakers. My PTT connections are going through homemade splitters hanging from the wires behind the desk.

I started looking for a better solution. My plan was to keep my current coax antenna switch that is located outside, but replace my radio switch with something that can also switch the PTT and ALC, and it has to offer the same isolation protection or better than my

current setup. In parallel I was looking for a speaker switch. The goal was to make some room on my shelves by removing some extra speakers. I also wanted to be able to use any of my radios with my bhi audio equalizer with DSP noise filtering. If everything can switch together, it will simplify and facilitate the comparison between my radios, as they will be using the same set of speakers. In my online search, I found some interesting products, but I kept coming back to the W2IHY website. My first impression was that it was expensive — until I understood its value. After a lot of reading, I couldn't find any equivalent. At the end, I concluded that the W2IHY coax switch and the iPlus were the best integrated solution for my needs.

Bottom Line

W2IHY Technologies offers one of the most advanced switching solutions for a station using multiple radios with multiple antennas. With its well-thought-out product integration, one-switch knobs allow switching safely between three radios, the microphone, the audio speaker output, the PTT, the amplifier keying, the ALC, and the coax input.

My initial intention was to buy only three out of the four units, but I soon found that if I added the W2IHY eight-band audio equalizer and noise gate, I would be able to use only one microphone that would be switched at the same time as the coax, PTT, ALC, and speakers. This also means that I can use an Icom, Kenwood, or Yaesu microphone that will work on all three HF radios.

The W2IHY 3 × 4 Switch Plus Controller

The 3 × 4 switch plus controller lets you control up to three radios to a single coax output. It's built to last with a rugged steel chassis, and it screams quality. The unit is 16 × 3½ × 5 inches. It's also possible to rack it into a 19-inch rack mount (an optional bracket is available for \$40). It can handle up to 10,000 W of RF (PEP) and offers isolation between its coax ports greater than -70 dB, according to the manufacturer. My observations confirm that this is accurate and similar to my previous setup (more on this later; not tested by the ARRL Lab).

With this coax switch you can switch and route up to three radios to a single amplifier or one antenna output, plus the amplifier keying (PTT). The ALC and the speaker's output will automatically follow the selected radio.

There's another option that you can buy to switch multiple antennas to multiple radios — the 1 × 4 coax switch. But I wanted to keep my outside remote switch for my HF antennas, so I didn't need it. The 1 × 4 coax switch combined with the 3 × 4 coax switch plus will provide more output connection, allowing for the ability to switch three radios to up to three amplifiers or up to four antennas. If you have more than three radios, you can cascade another 3 × 4 switch if you wish.

The Front Panel

On the front panel, from left to right, you have the **POWER** switch with a yellow LED on top that will be lit when turned on. When the switch is in the off position, coax for all three radios will be put to ground. This is automatic and very convenient. Then you have the **TUNE** switch. When the red LED above is off (switch down), the amplifier PTT will be keyed, but when the switch is up, the LED will be on and your amplifier will not be keyed. Next, you have the **LOCAL / REMOTE INPUT SELECT** switch for the **RF INPUT** (the radios). You have four positions that you can switch using this rotary knob: radio **A**, **B**, **C**, and

REMOTE. Obviously, this lets you switch between three radios — **A**, **B**, and **C** — and the **REMOTE** position is used when the switching is controlled by another box, like the iPlus (more on this later). For each radio you have a rotary knob with three positions for the **RF OUTPUT**, **1**, **2**, and **3**. If you have only one output connected on the coax switch and no 1 × 4 remote switch (like me), then all three radios' **RF OUTPUT** will be the same even if they are set to different positions (**1**, **2**, or **3**). If you have the 1 × 4 remote switch, you can set different output for each of the three radios. The final switch on the front panel is the **AUX** switch, which is to be used when the coax input of the optional 1 × 4 switch is connected to the auxiliary coax output of the 3 × 4 switch. In my case, this one is off.

The Rear Panel

On the rear panel (see Figure 5), from left to right, on top you have five DIN types of connectors. The first two have six pins and are for power — **POWER IN** and **POWER OUT** — if you need to power a second switch. The power requirements are 10 to 15 V dc at 1 A for powering one 3 × 4 controller and one 1 × 4 antenna switch. You will need 2 A if you want to power two of each. The power cable is included but you will need to connect it to your station's power supply. Keep in mind that the cable has no fuses but there is a fuse inside the unit. I used a dc power distribution outlet that is already fused.

The three other DIN connectors use five pins. The first one, **INPUT SEL**, is used when the **LOCAL / REMOTE** input select switch is in the **REMOTE** position. It allows the selection of the **A**, **B**, and **C** coax inputs (the three radios) to be selected remotely. The **OUTPUT SEL** is used to identify which of the three coax outputs (**1**, **2**, or **3**) on the optional 1 × 4 switch is active. This DIN connector can also be used to connect to the input select (**INPUT SEL**) of a second 3 × 4 switch when adding more radios, and an additional level of switching is required. The **OUT TO 1 × 4 SEL** connection switches the coax input of the 1 × 4 switch to one of the four coax outputs. If you want to switch the coax input with the iPlus audio switch, only the RCA connectors need to be connected, and you will

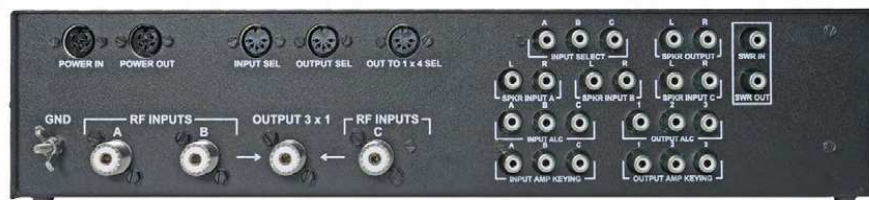


Figure 5 — The W2IHY 3 × 4 Switch Plus controller rear panel.

be able to switch remotely if the coax switch is in the **REMOTE** position.

Below the DIN connectors you have an obvious **GND** connection and four SO-239 connectors. The first two are for radios **A** and **B** (**RF INPUTS**). Then you have the **RF OUTPUT 3 × 1**, where you connect your amplifier or your antenna depending on your setup. The next one is for the third radio input (**RF INPUTS C**).

From the middle to the right of the rear panel, you have multiple RCA connectors, along with all the input and output for radios **A**, **B**, and **C** for the PTT, ALC, and speakers. Other than the input and output mentioned previously, you have three RCA connectors for remote switching, **INPUT SELECT** (where I connected the iPlus audio switch). You also have two RCA connectors for **SWR IN** and **SWR OUT**, which prevent keying the amplifier in case of high SWR or for other reasons. They may be connected to an SWR meter, an antenna tuner, or a SteppIR controller that has circuitry to disable amplifier keying when required. If you want to enable the PTT feature at all times and have nothing to connect to the **SWR IN** and **SWR OUT**, you will need to connect them; otherwise, the PTT won't work.

For more information about the 3 × 4 switch plus controller, you can download the manual online at <https://w2ihy.com/wp-content/uploads/2020/06/3x4SwitchManual.pdf>.

The W2IHY iPlus Audio Switch

The iPlus audio switch can be used to switch between three radios, the audio speaker output, the audio mic input, and the PTT. It must sound similar to the coax switch, but it can use one or two audio inputs to any of the three connected radios, plus it's meant to work in combination with the coax switch, as it can remotely control the radio selection. This means that if you have both units, you have only one switch that will switch everything to any of the three radios. I needed the iPlus audio switch to have two audio inputs and three audio outputs to the radios (the mic inputs). The first audio input is for the microphone (in my case it's the eight-band EQ), and the other is used to connect the iBox interface that is used for the LP-700 two-tone audio output. This allows me to inject a two-tone audio signal to the selected radio, a very convenient option.

The Front Panel

On the iPlus front panel, the first rotary knob on the left is the main switch for the three radios. If you connect the iPlus to the **INPUT SELECT** RCAs on the 3 × 4

switch plus controller, the iPlus will remotely switch the coax as well if the controller is in the **REMOTE** position. Next, there is a flip switch named **INVERT PHASE ON**, which reverses the phase of the audio output 180 degrees for proper AM modulation asymmetry. The other three knobs are for the **OUTPUT LEVEL**. These allow you to adjust the audio level output to the radio's microphone input independently.

The Rear Panel

On the rear panel (see Figure 6), from left to right, you will find the first two audio inputs (there are a total of three). The **AUX INPUT** uses a five-pin DIN connector, and the other uses an XLR named **AUDIO INPUT**. Next, on the right you have three other five-pin DIN audio outputs, named **AUDIO OUT**. I use these to connect up to three radio microphone inputs. On the right side of the rear panel, you have several RCA connectors to connect the speaker output and the PTT of all three radios to one output. In my case, the iPlus is used only for audio input, and all the PTT, speakers, and ALC connections are made into the 3 × 4 controller.

The iPlus is passive equipment, and no external power is required. The unit dimensions are 9 × 3 × 5.5 inches. There is no ground connector, but I used a screw on the chassis to ground the iPlus to the station common ground.

For more information about the iPlus audio switch, download the manual online at https://w2ihy.com/wp-content/uploads/2020/06/iPlus_manual_8_21_12.pdf.

The W2IHY iBox Audio Interface

The iBox is a variable attenuator and an interface box. Its dimensions are 4 × 1¼ × 1¼ inches. It's small (see the lead photo), and it doesn't require any power. You can buy it in a kit or as a fully assembled unit. This unit is simple but very useful, as it can serve many purposes, like interfacing an external audio device to your radio equipment, matching impedance, isolating your audio from hum caused by ground loops, providing RFI isolation, and interfacing with balanced and unbalanced audio gear. On top of the



Figure 6 — The W2IHY iPlus audio switch rear panel.

There are many reasons that you would need an iBox, but in my case it was to connect the audio output of my Telepost LP-700 to the iPlus in order to be able to send a two-tone signal to any of my HF radio mic inputs. What's funny is that on page 10 of my LP-700 user guide, Telepost suggests using the W2IHY iBox to interface the two-tone output to the radio.

Planning and Making the Connections

I decided to buy from W2IHY all the necessary cables to connect my radios and equipment. I could have bought all the connectors and cables and soldered them myself, but I would still have to buy the cables, connectors, etc., and I would have to do the soldering of many small pins, which is always a struggle for me. So, I bought the 3 × 4 switch cable package (\$60) and three pre-made 8-foot mic

Julius had carefully prepared the diagram and all the cables to connect my equipment. Figure 7 is just one example, as there were many in the custom manual. Every diagram comes with a text description, and there's one for each type of connection, like the speakers, microphone inputs, ALC and PTT amplifier connections, etc. — this includes all your gear you need to connect. Julius sent the custom diagrams to me prior to shipping the equipment to ensure we were both confident it would be correct for my setup.

On-the-Air Operation

Since I added the W2IHY equipment to my station, the way I operate my HF radios has changed com-





Figure 8 — The complete pre-wiring of all four pieces of W2IHY equipment.

pletely. Sometimes I even switch radios in between a transmission while in a QSO, and the receiving station can't even tell. It's such a pleasure to be able to enjoy my radios with a flip of a single switch. Now I do it all the time, just for fun.

I have only one microphone on the desk and only one set of speakers connected to the bhi audio equalization amplifier with DSP noise filtering that switches along with the other radio connections. At any moment I can send a two-tone audio signal to the active radio without touching any cables or going into any menus to change the mic input. All followed the only switch I used, the one on the iPlus. I can switch quickly and safely between radios and compare them in different situations.

When I switched radios before, I put the unused transceivers on another band (usually 6 meters), as far as possible from the transmitting frequency. While doing the tests with the Expert Electronics MB1 after installing the W2IHY equipment, I forgot to put the Icom IC-7610 to 6 meters, so both radios were set at the same frequency. I was running 1 kW on 80 meters and didn't hear any feedback while transmitting as the speaker was on the active radio, but when I looked at the Icom IC-7610, the received signal was only +20 over S-9, so the coax switch was doing a great isolation job. This is good to know, and with the coax switch, the speakers switch automatically. It's like putting the other transceiver on mute. Switching radios has never been easier, and I'm confident that it's safe.

Conclusion

The W2IHY Multi-Switching System is a great addition to my setup. I'm very pleased with the result and the simplicity of operations that it provides.

I already knew that the W2IHY service was incredible, not only because of the reputation of the company but also from a past personal experience. In 2003, I bought a used W2IHY eight-band equalizer on eBay, and when it arrived it didn't work. I contacted Julius, W2IHY, and he tried to solve the issue over the phone. Ultimately, however, he asked me to ship the unit to him. When the unit was returned, it was repaired for free as the unit was still under warranty, so I only had to pay the shipping. This tells a lot about the manufacturer backing its products. Even if I didn't buy the unit from him, he still provided the support service. Plus, if you're not totally satisfied, he offers a 30-day, no-questions-asked, money-back guarantee.

If you have many radios and want to use them safely without disconnecting any cables, W2IHY can help you set up a safe and efficient multi-switching system to suit your operating needs.

Manufacturer: W2IHY Technologies Inc., 19 Vanessa Ln., Staatsburg, NY 12580, www.w2ihy.com. Price: 3 x 4 Switch Plus Controller, \$549.99; iPlus, \$239.99; iBox, \$79.99; Eight-Band Audio Equalizer, \$299.99. Shipping and cabling not included.

DVMEGA Globetrotter Digital Voice Companion


Reviewed by John Leonardelli, VE3IPS
jleonardelli@arrl.net

One of the fastest-growing segments of the radio hobby is the use of digital voice modes, and one of the significant devices catering to this growth is hotspots. As an avid user of the D-STAR digital mode, I've explored various radio frequency hotspots and dongles over the years. These devices act as bridges, connecting radios to the internet and facilitating communication through digital modes. Most digital hotspots have become increasingly popular, necessitating the use of a digital radio for operation. In contrast, some AMBE (Vocoder Chip) dongles/servers ("server" is the term used by DVMEGA) offer a unique advantage, as they don't necessitate a digital radio for this mode of communication, making them a compelling addition to your communication tool kit.

The DVMEGA Globetrotter stands out as a powerful digital voice communication AMBE dongle, offering an array of features for amateur radio enthusiasts. Utilizing *BlueDV* and *Peanut* software, in partnership with David, PA7LIM, this dongle transforms into a versatile digital voice communication tool, enabling radio-less communication from any location with an internet connection and a personal computer. Supporting various digital radio protocols, such as D-STAR, C4FM (Yaesu System Fusion), DMR, and NXDN, the Globetrotter is an upgraded version of the DVMEGA DVstick30, both manufactured by Guus, PE1PLM, and Dooren Electronic Systems. You can find new coverage on digital protocols and modes in the 100th edition of *The ARRL Handbook*.

Build and Design

The Globetrotter features a compact and rugged design suitable for both indoor and portable use. While not waterproof, its splash-resistant membrane-covered front panel enhances durability. The well-thought-out setup using front-panel buttons ensures fast and easy configuration. The bright and crisp 1-inch OLED display, along with a screensaver option, adds to the user-friendly design.

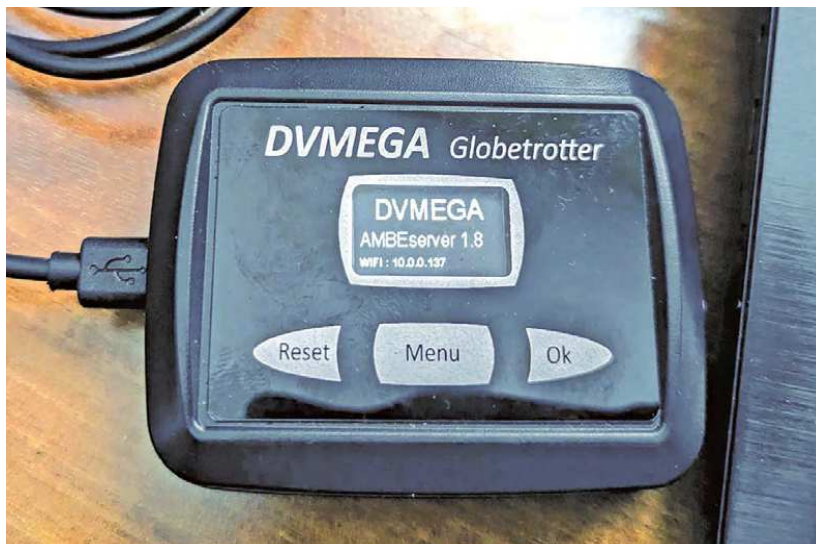

This palm-sized dongle connects to your computer via the supplied Micro USB-B cable, utilizing your computer's soundcard, microphone, and speaker (see Table 2). It also draws power from the PC USB port. The Globetrotter serves as a Swiss Army knife for digital voice communications, eliminating the need for a dedicated radio. Dual connectivity options set the Globetrotter apart. It is essentially an AMBE server and AMBE dongle in one, with the ability to switch between the two modes.

Setup Instructions

To get started with the Globetrotter, follow these steps to configure Wi-Fi settings and choose between the two AMBE modes. The *BlueDV* software is a crucial component to make everything work and is the equivalent of a physical radio front panel.

For digital voice communication with other radio operators, it is imperative to be registered for various digital modes, ensuring inclusion in their infrastructure trust access list. Visit www.radioid.net to facilitate your registration process and obtain the required IDs.

Bottom Line

The DVMEGA Globetrotter paired with *BlueDV* software allows radio-less digital voice communications using your internet-connected personal computer.

Table 2**DVMEGA Globetrotter Digital Voice AMBE Hotspot****Manufacturer's Specifications (not tested in the ARRL Lab)**

Digital modes	Support for DMR, D-STAR, NXDN, and C4FM (Yaesu System Fusion)
Boot time	Less than 2 seconds
Display	1-inch bright OLED display
IP addressing	Static or DHCP (dynamic)
Software update	Automatic feature
Dimensions	3.5 × 2.5 × 1.2 inches (90 × 62 × 30 millimeters)
PC connection	Micro USB-B to USB-A (cable included)
Power	5 V dc via Micro USB-B
Baud rate in dongle mode	230400

Given the absence of provided instructions, I visited their website and found a helpful video link. The setup process for the *BlueDV* software is straightforward (see Figure 9). Shu, JA3GQJ, has crafted a comprehensive manual for this software, available at <http://radioham.mydns.jp/bluedv/BlueDVWindows.pdf>. Familiarize yourself with this manual before initiating the configuration process, as it explains the essential configuration parameters and user guide. I followed the video instructions and took notes, and after a few attempts to program both the Globetrotter and *BlueDV* application, I got it working.

Navigation through menus and inputting alphanumeric characters using the Globetrotter front-panel **MENU** and

OK buttons are user-friendly, contributing to an overall positive user experience.

I configured the Globetrotter as an AMBE dongle, establishing a direct connection to the USB port on my Microsoft Windows PC. You may have to identify the COM port for your Globetrotter using the Windows Device Manager. Configure *BlueDV* for the COM port, and click **SAVE**. After rebooting the Globetrotter, I successfully monitored an ongoing QSO on a D-STAR Reflector REF030C.

Configuring the AMBE server mode is just as straightforward, this time utilizing Wi-Fi for connectivity to the *BlueDV* application. Employ the Wi-Fi **<SCAN>** function to locate your Wi-Fi router, input the password, and click **EXIT AND SAVE**. Configure *BlueDV* to enable **USE AMBE SERVER**, entering the host IP address of the dongle and clicking **SAVE**.

Use Cases

The Globetrotter, functioning as an AMBE dongle, is exceptionally well-suited for radio-less communication, catering perfectly to my operating preferences at home, during travel, and in portable setups. All that's needed is access to a Wi-Fi network connected to the internet.

For fixed mobile applications, connecting your PC to a Wi-Fi travel router or utilizing the shared Wi-Fi connection on your smartphone is an optimal setup.

Operating from various locations, such as parks, campsites, coffee shops, or club meetings, where Wi-Fi is available, is seamless and mirrors the experience from the comfort of your home.

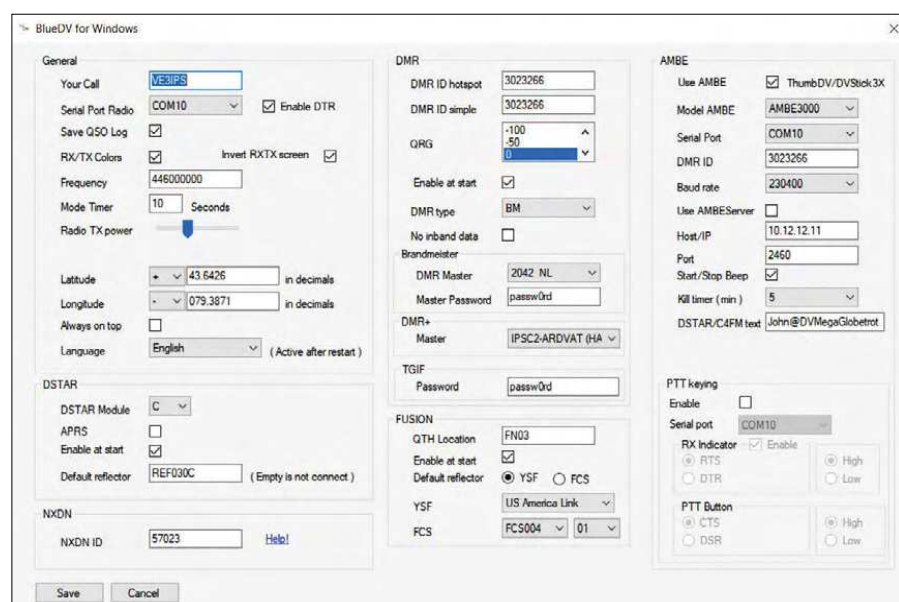


Figure 9 — The PC software screen capture of the *BlueDV* AMBE dongle settings.

During a recent club meeting, the Globetrotter garnered interest, particularly from individuals unable to set up high-frequency antennas. It serves as an alternative, enabling QSO activity in the hobby using the internet as your ionosphere.

I also used Globetrotter as an AMBE server. This time, I powered the device with my Goal Zero Sherpa 100PD power bank, allowing me to leave the Globetrotter in my shack while moving freely around the house with my laptop for seamless communication. This convenience proved invaluable,



Figure 10 — The DVMEGA Globetrotter in AMBE dongle mode on the kitchen table.

especially when transitioning from my shack to the kitchen for various tasks (see Figure 10).

I also enjoyed making contacts from a local coffee shop, but this time I used my Bluetooth headset.

I configured *BlueDV* to default to D-STAR REF030C, Fusion America Link, and NXDN Talk Group 65000, facilitating enjoyable participation in diverse conversations with fellow hams. Globetrotter, as its name implies, opens up global digital voice communication opportunities with just a click.

I now keep Globetrotter in my computer bag for digital voice communications without the need for radios, batteries, chargers, and rubber duck antennas. In the past when traveling, I would bring multiple radios with me, and now I bring just a handheld radio for local repeater access and my Globetrotter.

Looking ahead, I am eager to explore the possibilities of using Globetrotter with the available *BlueDV* and *Peanut* Android software, anticipating further experimentation and expanded capabilities.

Performance

The Globetrotter stands out with remarkable audio quality and signal clarity. Whether utilizing the PC's internal microphone and speakers, Bluetooth speakers, or wired gaming headsets, its sound quality surpasses that of other dongles and hotspots. The Globetrotter excels in monitoring all four digital radio modes using *BlueDV* simultaneously, offering the flexibility to select the desired mode for transmission by clicking on the mode icon. Dashboards allow "last heard" and other information to be available in the side bar windows.

I was able to operate using an i7 Core Windows 10 laptop, an HP Stream netbook, and a Microsoft Surface Go 2 laptop. With a dongle boot-up time of less than 2 seconds, the Globetrotter proved to be highly stable, with no observed issues or reboots necessary.

I conducted a power drain assessment with an external power source, using my USB analyzer and measured approximately 180 mAh in idle mode and 250 mAh in transmit mode. It's worth noting that this power consumption could impact your PC's battery life. After a few usage instances, you'll gain a better understanding of its influence on your PC's operating time.

Software and Updates

The manufacturer's dedication to ongoing support is evident through regular software updates. The auto-update mechanism streamlines the updating process by checking for new software versions upon power-up. Executing a simple menu command initiates the software update. Additionally, don't forget to update the *BlueDV* software to ensure seamless compatibility with the Globetrotter. Keeping both pieces of software up to date ensures optimal performance and functionality.

Conclusion

At its price point, balancing performance, versatility, and build quality, the Globetrotter presents a sound investment for amateur radio enthusiasts. Its ability to directly communicate using a PC offers cost savings compared to acquiring multiple digital radios.

Enhancements could include the storage of multiple Wi-Fi access-point SSIDs as profiles in the dongle, streamlining reconfiguration steps. Additionally, adopting a USB-C connector and providing an instruction leaflet with step-by-step instructions would enhance the overall user experience.

In summary, the DVMEGA Globetrotter stands out as an excellent choice for amateur radio operators seeking a reliable device supporting various digital radio formats without the need for a dedicated radio. Its robust build, dual connectivity options, and impressive performance make it a standout in its category, offering enthusiasts a high-quality digital radio experience and a welcome addition to your communications tool kit.

Manufacturer: DVMEGA, Dooren Electronic Solutions, Boemdijk 6C, 4417BE Hansweert, Netherlands, www.dvmege.nl. Price: \$149.95.

Ask Dave

Get more information from the “QST: Ask Dave” YouTube playlist at <https://bit.ly/3z2MBMI>.

Tips for Common Concerns

Testing Coax for Water Infiltration

Q Rollin Gary, WA5RFG, asks: Another ham had a problem with water infiltration in one of his antenna feed lines. Standing wave ratio (SWR) would not uncover the problem because the reflected signal experienced the same loss as the transmitted signal. The only suggested approach to test the coax is to disconnect it and check the SWR with the coax open and shorted, as they should both give the same high SWR. Is there any other way to test coax while it is in service?

A Water in coax is best dealt with by prevention. Use coax rated for direct burial. Wrap all connectors with appropriate UV-resistant, weatherproof self-bonding sealing tape for coax connections. This tape makes a water-tight seal. You can also use a 3M product that is not UV-resistant and wrap it again with standard electrical tape like I do. You should check these wraps yearly to ensure the tape has not cracked. Create drip loops that can prevent water from running down the outside of your coax and encountering a connector.

The impurities in the water will start to corrode the shield. If water gets in through a connector, it can infiltrate the center conductor and eventually destroy the cable. If the cable is corroded, the only solution is to replace it.

You can strip off a couple of inches of the outer plastic shield and check for water in the cable. Touch the cable's wire leads with a tissue to indicate the presence of water. If there is any, you will need to replace the cable. Or you can chop off the connector to get a good look at the inner conductor. Note that nicks in the outer plastic cover can admit water. The woven outer shield will wick water into the entire piece of coax. This is where you should only use new cable and protect it properly.

PL-249 and SO-239 coax connectors are not waterproof. If you run coax in conduit underground, it will eventually fill with water over time, so make sure your conduit is rated for direct burial. Don't bury connections, even if they are sealed with self-sealing tape, because the tape is stretched slightly as part of applying it, and this slight tension will eventually crack the tape. For this reason, you should make the entire underground run with a single piece of

carefully inspected cable. N connectors are ostensibly waterproof but should be wrapped anyway. Conduit (plastic or burial-rated metal) can help protect the cable from gophers and other pests. Temporary cable installations can end up in place for years, so do it correctly from the beginning.

The Truth about Antenna Tuners

Q Michael Wurzer, DF7RO, asks: I'm getting back into ham radio after 44 years. In that time, old tube rigs have given way to transistors. I have heard many statements about antenna tuners, including that the tuner burns all the power reflected by the antenna and that the only purpose of the tuner is to make the transmitter happy so that it won't lower its output power. If the tuner does reflect the reflected power back to the antenna, is there some time delay? Which statements are correct?

A Old tube transmitters usually had a pi network output tuning circuit. The pi network is a form of an impedance-matching device that matches the transmitter output impedance to the input impedance of the combination of the transmission line and the antenna. However, with the introduction of transistor radios, the output impedance was fixed at 50Ω, and any mismatch between the transmission line and the transmitter could cause excess heat to be generated in the output transistors.

The solution is an antenna tuner. This is a misnomer, as we are not tuning anything. Rather, this is a small network of reactance that would look like a 50 Ω zero phase angle

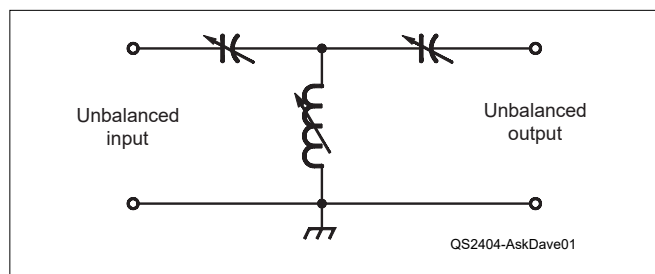


Figure 1 — A standard antenna tuner design. All three elements are adjustable. The first step is to tune for maximum received noise or signal volume. Then switch the transmitter to low power, and the knobs can be adjusted for the lowest SWR.

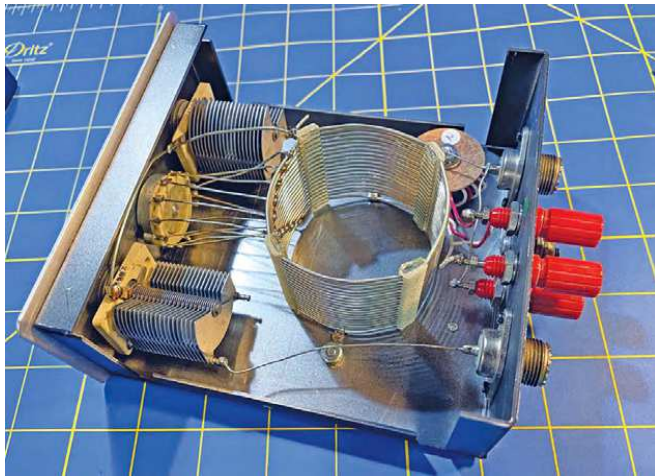


Figure 2 — The working components of an MFJ-901B manual tuner. There are two variable capacitors. A switch that can change between taps on the coil is in the middle. The schematic is the same as shown in Figure 1. The small component at the far right is a 4:1 balun that permits the tuner to drive window or ladder line.

load to the transmitter when properly adjusted. The antenna tuner only has reactive parts because its only purpose is to match impedances. Theoretically, the tuner cannot dissipate power as heat because there are only reactive components. The schematic for a standard, modern antenna tuner is shown in Figure 1, and the inside of a simple tuner is shown in Figure 2.

You need an SWR meter to tune it properly, and many external antenna tuners have built-in SWR meters. The first step is to twiddle the knobs for maximum receiver noise. Then a few watts from the transmitter will provide a steady carrier, and the knobs can be slightly adjusted for the lowest SWR. The transmitter final output transistors are happy when they see the load they want. The complex conjugate of the impedance presented by the combination of the transmission line and the antenna is in the output side of the tuner. So, if the antenna system is capacitive by virtue of being too short, the tuner adds inductance. The net of this is that the reflected power comes back to the tuner and is turned around and pointed back to the antenna. Some of that power is radiated, and some comes back to the antenna, and the same thing happens. No power (other than tiny ohmic losses) is dissipated in the tuner because it's completely reactive. The same is not true in the coax. The coax handles the power that is dissipated and the reflected power. Given a poor match, the coax sees the antenna current many times over; the resulting heat dissipation can be large, and a substantial part of the signal can be lost before radiating.

Sometimes, antennas present funky impedances when dealing with large loops used on higher frequencies. For this reason, these antennas are often fed with ladder or window line because of the much smaller losses in these transmission lines. The best option is to tune the antennas

for low SWR, so you won't need a tuner. All modern radios have built-in tuners, and many are automatic, but the built-in tuners can rarely handle an SWR larger than 3:1.

Because there are potentially large voltages and currents in an antenna tuner, higher power requires beefier tuners. Therefore, tuners are rated in watts, indicating the transmitter power they can work with. I have an MFJ automatic tuner that can handle 300 W, but I no longer use it because I've carefully tuned my antennas by trimming them to an appropriate length.

It is possible to put a remote antenna tuner at the feed point of an antenna. This is most often done at the base of vertical antennas that will be used on multiple bands. In this case, there is no transmission line between the tuner and the antenna, eliminating the transmission line ohmic losses.

Relearning Ham Radio

Q Peter Walker, KB3VQT, asks: I already have my General license. However, I don't think I truly learned the basics of ham radio. What would be the best way to relearn ham radio from the beginning?

A You can carefully follow study guides such as ARRL license manuals and associated videos. Or you can get a ham friend to mentor you. But the best and quickest way to get into ham radio is to set up a station and get on the air. I emphasize getting on the air because it requires you to get over your mic fright and transmit! Having a mentor help you through this is important. Your first several HF contacts should be with people you already know. Check out www.dcasler.com/reference for specific recommendations to build a General station. If you follow the reference design, you'll have a nice station that should keep you happy for a few years. Or you can substitute things, such as getting a Yaesu FT-710 instead of the Icom IC-7300. Getting on the air will generate questions. Ask other hams on the air or at a club, which leads to joining a club! ARRL Affiliated Clubs can be found at www.arrl.org/find-a-club. You may have to do some club shopping to find a group you feel the most comfortable with.

I also emphasize joining ARRL (see www.arrl.org/membership). It will pay rich dividends just from the magazines alone. In your ham radio journey, everything somehow seems to trace back to an ARRL publication. As with everything, the key to success is summarized in one word — persevere!

Send your questions to askdave@arrl.org. I answer some questions here, and some via videos on my YouTube channel (www.youtube.com/davecasler), or during my weekly livestream on Thursdays at 6:45 to 8:15 PM Mountain Time on my channel.

Microwavelengths

Local Oscillators for Transverters

The “Microwavelengths” column in the January 2024 issue of *QST* discussed transverters and how the local oscillator (LO) is an essential part. The LO provides a signal to the mixer at a frequency that is added to the IF signal to create a microwave signal for transmission. The LO also provides a signal to the mixer at a frequency that is subtracted from the microwave frequency to receive IF signals on a VHF or UHF transceiver. Finding weak signals or operating digital modes requires an LO that is clean, stable, and on frequency, and has low phase noise.

Traditional LOs started with a crystal oscillator, typically around 100 MHz. Then the crystal frequency was multiplied through a series of frequency multipliers, such as doublers, triplers, and quadruplers, up to the ultimate LO frequency. For a 10 GHz LO, the frequency might be multiplied 96 times or more. A crystal oscillator usually provides a very clean signal, but many multipliers can create off-frequency lower-level signals that can reach the mixer and produce unwanted signals. One result can be spurious signals in the receiver, which can be hard to differentiate from desired weak signals.

Good crystals needed for the LO frequencies have become difficult to find, so the trend is to use a flexible frequency synthesizer to generate LO signals. A modern version uses a single-chip synthesizer. These have onboard frequency dividers that convert to a low frequency, which can be compared to a reference crystal oscillator, typically at 10 MHz. Then a phase-locked loop controls the onboard voltage-controlled oscillator (VCO). The chips typically operate in the 1 to 4 GHz range, so additional frequency multiplier stages might be needed for higher bands.

Phase noise is created when any noise in the system reaches the oscillator and modulates it, changing the frequency slightly. A slight change at a low frequency (10 or about 100 MHz) is magnified by the frequency multiplication, so it worsens by 6 dB at high frequencies for each frequency doubling or almost 40 dB worse for a 96 multiplier. Crystals have very high Q, so they are less susceptible. However, the VCO in a synthesizer is sensitive to voltage, resulting in larger frequency variations from small amounts of noise. For example, if the VCO

sensitivity is 100 MHz per volt, 1 μ V of noise will result in 100 Hz wide phase noise. Digital noise from the frequency dividers on the chip and noise from power supplies reaching the oscillator make things worse. Very low noise power supplies and voltage regulators are important for synthesizers. Figure 1 shows phase noise in the output of a synthesizer and spurious signals generated by the synthesizer.

MDS and Phase Noise

The problem with phase noise is that it can raise the noise floor in your receiver, masking weak signals, and the minimum discernable signal (MDS) becomes larger. This is an insidious effect because it sounds just like any other noise.

The North East Weak Signal (N.E.W.S.) Group does an MDS comparison on several microwave bands at their annual summer picnic. Participants aim their antennas at a distant signal source, and the signal level is reduced in small steps. At some level, the signal disappears into the noise, so we can see how each system compares. This either assures that the system works well or highlights a problem to fix before the next contest or operating event.

Several years ago, I wanted to see if the phase noise of a synthesizer-based LO would affect MDS. Steve Kostro, N2CEI, at Down East Microwave, lent me a test



Figure 1 — Spectrum analyzer view of an inexpensive imported synthesizer signal with phase noise.

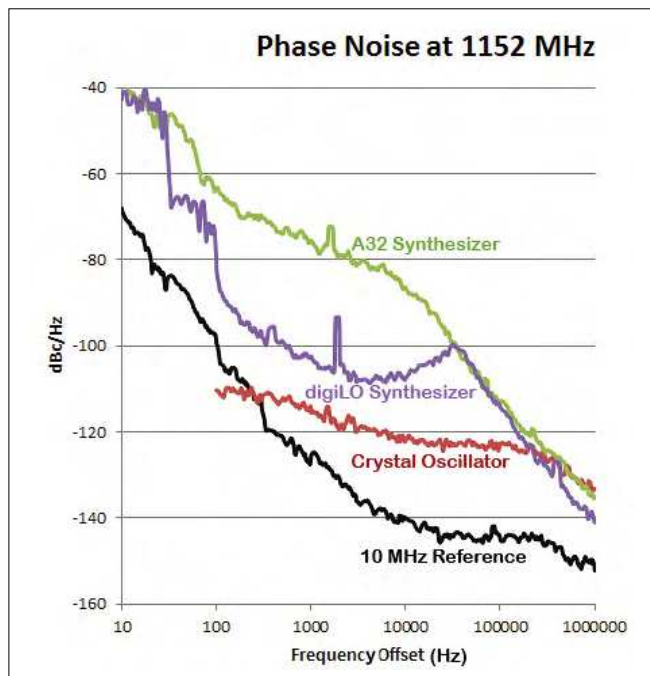


Figure 2 — Phase noise comparison of A32 synthesizer used in MDS testing to a new digiLO synthesizer and a crystal oscillator LO. The 10 MHz reference oscillator was used for both synthesizers.

10 GHz transverter with two switchable LOs, one with a traditional crystal oscillator and the other using a synthesizer. MDS testing at the picnic and switching back and forth showed that the MDS with the synthesizer was 2 dB less sensitive than with the crystal oscillator. Later, I set up a test range at home and got the same result to show that the experiment could be replicated.


Synthesizer Phase Noise

The A32 frequency synthesizer LO used in the MDS tests was one of the first made specifically for hams. A few new types have become available, some specifically for LO use, others for general purposes with pushbutton or computer-frequency selection.

I measured phase noise close to the LO carrier, where it has the greatest effect on MDS using sophisticated equipment at various VHF conferences. Figure 2 shows a few of the results. Some are significantly better by 10 to 20 dB than the A32 used for the MDS experiment. Any of the digiLO synthesizers from <http://q5signal.com>, made by and for hams, are the best. I've had excellent results at 10 GHz with one of the synthesizers but haven't repeated the MDS experiment yet.

One important factor in synthesizer performance is how it is programmed. The chip can be programmed in integer mode, where the frequency is divided by an integer, and the operation is fixed. In fractional-N mode, when

Figure 3 — Partial schematic of a typical crystal oscillator showing the recommended location for injection locking.

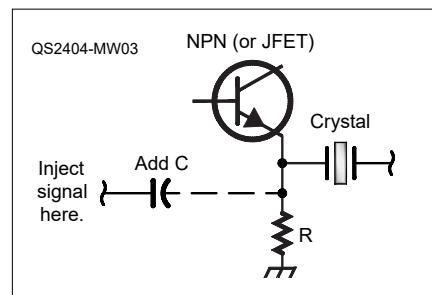

the frequency cannot be divided by an integer, the chip switches rapidly between two integer ratios and averages them to the desired frequency, which creates spurious signals. In theory, there would be no difference between the two modes, but real electronics don't always read the theory, and the integer mode is usually better. Fortunately, the LO frequencies needed for microwave transverters are all even MHz, which should be programmable with integer dividers.

The N.E.W.S. Group sponsors two 10 GHz beacons in New England that use good synthesizers to generate the beacon frequency. Tom Cefalo, W1EX, programmed them. He empirically found that certain frequencies were much cleaner than others and chose two for the beacon frequencies. If you are programming a synthesizer, pick round numbers and check carefully with a spectrum analyzer, even if you can't measure phase noise.

Practical LO Suggestions

If you are considering building a new microwave transverter, I recommend a synthesizer locked to a GPS reference for ultimate frequency accuracy. On the other hand, you might already have a good transverter where frequency accuracy or stability is marginal. The crystal in my old transverter has aged enough to have shifted 60 kHz at 10 GHz and tends to drift in the hot sun. A crystal oscillator can be stabilized by injection locking. Oscillators tend to synchronize if their frequencies are close together. A small accurate frequency injected into a crystal oscillator will cause it to settle at the same frequency. I found that a 106.5 MHz crystal oscillator will lock to an injected frequency within about ± 1 kHz, or about a 200 kHz range at 10 GHz. A signal level of about -8 dBm is adequate for locking the frequency.

Most oscillators have one end of the crystal connected to the emitter of a transistor (or source of an FET) with a resistor to ground, as shown in the "Inject signal here" portion of the partial schematic in Figure 3. The injected signal can come from a synthesizer, as the high-Q crystal in the oscillator determines the phase noise. Thus, we can have a clean LO with accurate frequency.

Introducing the ARRL Amateur Radio Innovation Award

In October 2023, John Karickhoff, MD, AA4JJ, had a vision — that we could inspire innovation in amateur radio through outstanding articles in ARRL publications. First licensed as a sophomore in high school, Dr. Karickhoff is 85 years old and has enjoyed 71 years of benefiting from amateur radio. As a licensed physician and ophthalmologist who has taught in a university and performed surgery on thousands of people, he realized that innovation is what truly advances humanity. Creativity and innovation — doing something that no one else has done before — have given him the greatest personal reward.

Dr. Karickhoff is no stranger to innovation himself. He is the inventor of multiple medical devices with US patents, the only researcher to innovate or advance treatment for all 14 parts of the human eye, and the designer of 10 original ophthalmology concepts. He also introduced 13 ophthalmic surgical procedures in Virginia and, in his spare time, published a faster method for learning to play the guitar.

Because of all of this, and through his philanthropy to endow a new award, ARRL is proud to introduce the ARRL Amateur Radio Innovation Award.

This annual award, recognizing an innovation that advances amateur radio technically or advances its enjoyment, is given to the author of an article published in *QST* or another ARRL publication. The article is determined to be the best published feature in the prior calendar year. This award further establishes ARRL as the center and repository of innovation in amateur radio within *QST* and other ARRL publications, and emphasizes that innovation is the way that the art and science of amateur radio is advanced. The \$1,000 yearly award was endowed by an initial gift from John Karickhoff, MD, AA4JJ. ARRL is grateful for the vision, inspiration, and generosity of Dr. Karickhoff, and partnering with ARRL to invest in the future of amateur radio.


ARRL Amateur Radio Innovation Award

Inaugural Recipient

Oryx “Rucio” Gazella, KØRYX

For the article “Ham Radio in Virtual Reality,” published in the November 2023 issue of *QST*.

The ARRL Amateur Radio Innovation Award is given to the author of the best article published by ARRL in the previous calendar year for an innovation that advanced amateur radio technically or advanced the enjoyment of amateur radio.

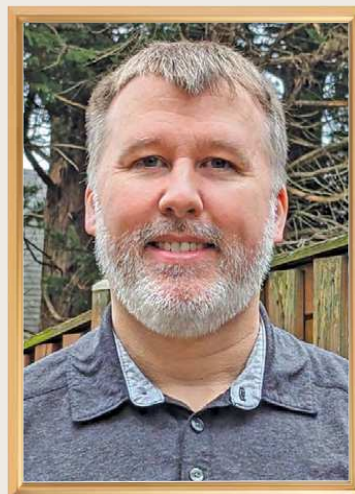

Oryx “Rucio” Gazella, KØRYX
Columbia, Maryland

This \$1,000 yearly award was endowed with an initial gift by John Karickhoff, MD, AA4JJ.

JWØX/JW1ØØQO: An Unforgettable DXpedition in the Arctic

During a memorable ham radio adventure in Svalbard, this DX crew made more than 32,000 contacts, one of which being the first ever from the QO-100 satellite.



Isfjord Radio in Kapp Linné, where the team stayed during the QO-100 DXpedition, is no longer active, but the masts and large satellite antennas are still there.

Max Van Rymentant, ON5UR

After nearly 16 months of hard work and planning, the DX Adventure team was ready to head to Svalbard for the JWØX/JW1ØØQO DXpedition on April 19 – 26, 2022. The first part of our DXpedition included operating as JWØX from Longyearbyen. Then, a handful of team members were set to travel to Kapp Linné for the second part of the operation to attempt to make the first-ever contact from Svalbard with the QO-100 satellite.

Our team members included: me; Erik De Mey, ON4ANN; Jelmer Vos, DJ5MO; Willy Ghysens, ON2BDJ; Carlo Houben, ON4BR; Cedric Baelemans,

ON4CKM; Patrick Blancquaert, ON4DCU; André Joos, ON4DTO; Erik Crabbe, ON4EC; Pascal Lierman, ON5RA; Marc Cosemans, ON6CC; Franky Beusel-inck, ON7RU; Francis Balcaen, ON8AZ; Marc Celis, ON8AK, and Mike Van Hoorickx, ON2MVH, who joined the team at the last minute to replace Marc Wullaert, ON4MA, because of a medical emergency.

JWØX Operations

Our adventure started on April 17, 2022, when we (and all of our ham radio equipment) flew from Zaventem, Belgium, to Oslo, Norway. From Oslo, we continued north to Tromsø and landed safely in Longyearbyen, Svalbard (see the sidebar, “Facts about Svalbard,” for



Erik Crabbe, ON4EC, and Marc Cosemans, ON6CC, setting up the DX Commander antenna in Longyearbyen.



Marc Cosemans, ON6CC, operating CW and Patrick Blancquaert, ON4DCU, operating FT8 for JW0X.

more information about the archipelago), on April 19. After gathering our luggage, we quickly noticed that the suitcase with our high-power band-pass filters was missing. We sent a complaint to the airline, and they promised it would arrive with one of the next flights.

The weather was perfect: sunny and only a few degrees below freezing. We cleared our 4 × 4 rental truck of snow so we could distribute all of our equipment among the three locations we would be staying at. We also had access to the Svalbard Amatørradioklubb's, JW5E, location.

We were eager to get JW0X on the air as soon as possible. By early evening, it was getting considerably colder, and the ice was incredibly slippery — while placing the DX Commander antenna, Willy had a serious fall on the ice and needed medical attention. A helpful man provided us with foil to keep him warm while waiting for emergency services. The emergency services in Svalbard are made up of volunteers, so it took some time for them to arrive. Luckily, Willy was able to leave the hospi-

tal later that evening, when our first two stations were ready to start our JW0X operations.

The first evening we made 1,390 contacts. Not all of our stations were operational yet, and we were still missing our high-power band-pass filters. Still, the pileups were better than we thought they would be — you never know what to expect in the far north.

Svalbard is almost constantly in the aurora zone, and when we were there, the sun never went below the horizon, resulting in constant light. Operating on 160 meters was hopeless, and 80 meters was very difficult. Operating on 40 meters was sometimes good, but during the day there was little to do. The 20-meter band was constantly open, and the 17-meter band was open about 20 hours a day. During the evenings, 15 meters was completely closed. Twelve meters opened sporadically, and 10 meters was rarely open. Despite the fact that some bands remained completely closed, we were able to make 4,090 contacts on the second day and 5,219 contacts on the third day. Four days



En route to Kapp Linné for the QO-100 DXpedition. The only way to get there was to take a 6-hour trip via snowmobiles.

after our arrival, we finally received our missing suitcase. After installing the filters, we were able to make 6,725 more contacts at this location.

QO-100 Operations

We visited the specialized outdoor adventure company Poli Arctici to discuss the final details of the QO-100 DXpedition with Stefano Poli; he and his team provided the transport to Kapp Linné for the DXpedition, and they were also responsible for our safety during the trip because of the large polar bear population in the area.

On the fourth day, Cedric, Patrick, and I left for Kapp Linné to join the QO-100 DXpedition. Before our departure, Stefano gave us instructions on what to do during an emergency. We then departed for our 6-hour trip with four snowmobiles, each equipped with a sled holding our ham radio gear, extra fuel, emergency equipment, and coffee.

Our trip to Kapp Linné was pure enjoyment — the beautiful scenery, the adventure, and the experience dominated the cold temperatures. We had to brave some mountains, and sometimes the slope was so steep that Stefano had to bring the sleds up one by one. We arrived safely at Isfjord Radio, a radio station that was important during World War II and was later used for communications to the mainland. The station is no longer in use, but the antennas and masts are still there, and the tourism company Basecamp Explorer has turned it into a hotel destination.



Patrick Blancquaert, ON4DCU, during the installation of the Triax satellite antennas. The team brought two 120-centimeter antennas because they were active with two stations at the same time on the QO-100 satellite.

Facts about Svalbard

Svalbard is 23,570 square miles and is the northernmost inhabited area in the world. Of the country's 2,500 inhabitants, about 1,700 moved to Longyearbyen from various countries. It's been said that Svalbard and Barents Sea are home to more polar bears (about 3,000) than humans. It's estimated that about 300 polar bears inhabit Spitsbergen, Svalbard's largest island.

From mid November to late January, Svalbard experiences a dark season, when the sun doesn't rise. Then, from April to August, Longyearbyen experiences the midnight sun, when the sun stays above the horizon. When the team was there at the end of April, they bore witness to this incredible phenomenon.

We found this location after months of research — it was the only place where we could have a line-of-sight connection with the QO-100 satellite over Africa. Remember, we are 78° north at the end of the QO-100 footprint, at an elevation angle of only 3°. Even though we had absolutely no guarantee of success, we knew it was possible.

After being welcomed with a delicious meal from Isfjord Radio Station Manager Maaïke Groeneveld and her team, it was time to unpack and build the stations. The feet of the Triax satellite dishes were stormproof, which was necessary, given their location in an open plain. At times, the wind was fierce, and with the cold temperatures, it took a little bit longer than usual to construct everything.

At the time, no one had attempted to reach the QO-100 satellite from Svalbard before; the pressure on our shoulders was enormous. When we saw the first QO-100 signals appear on our screens, the adrenaline raced through our bodies. Sixteen months of preparation and all of our efforts had paid off!

After adjusting our antennas, we had strong signals. During the first audio tests we had pronounced only a few words in Dutch, and operators went crazy — several stations immediately started calling us and shouting at each other to keep quiet. After urging them to be patient while we carried out a few more tests, it was silent again. Our thanks and respect for the discipline that was shown.

Our tests were complete, and we were ready to start operating. The first-ever contact from QO-100 in Svalbard was made with Alex Jamar, ON6AJ. To give as many people as possible a chance to contact us, we decided to put JWØX and JW1ØØQO on the air simulta-

neously. We were able to see peoples' excitement on social media, we received compliments and pictures of people celebrating, and we were sent images of the pileups. Seeing the world of ham radio enjoying itself was a great pleasure for us!

Maaike came around now and then to listen in, because it had been a very long time since signals were sent into the world from Isfjord Radio. She brought us some food so we didn't have to stop operating to eat — thanks, Maaike!

AMSAT-DL President Peter Gülzow, DB2OS, asked us if we wanted to attempt a contact with the German Antarctic research station, Neumayer Station III, DP0GVN, and on Saturday afternoon, we contacted Karsten Bøddeker, DM2KX, who was wintering there; the first-ever QO-100 connection between the north and south poles was in the name of the Belgians, thanks to the cooperation of Felix Riess, DL5XL. In total, we made 1,229 QO-100 contacts in 68 countries. We recorded 743 unique call signs in the logbook, including 38 Belgian calls. More than 50 percent of these contacts were made on our first night.

On Sunday evening, Stefano picked us up and safely brought us back to Longyearbyen. Once again, it was an unforgettable trip. We arrived a little after midnight and were welcomed by the HF crew with congratulations.

The HF crew in Longyearbyen had not been idle while Cedric, Patrick, and I were in Kapp Linné. On day five, they suffered from aurora but still made 5,797 contacts, and day six was completed with 6,730 contacts. On our last night in Longyearbyen, we stopped operating during the early hours of the morning so we could dismantle the stations and repack all 36 suitcases. We were able to make another 2,272 contacts. To our great surprise, the pileups were still as fierce as they were on day one.

Contacts Roundup

In total, we made 32,223 contacts, with 13,041 in CW, 10,115 using SSB, and 9,067 on FT8. See Table 1 for more information.

Without help from Basecamp Explorer and Poli Arcici, none of this would've been possible. Thank you for your cooperation, for answering our many emails, and above all, for your patience.

The expenses for the QO-100 DXpedition alone amounted to more than 10,000 euro (nearly 10,910 USD). Thank you for all of your donations and support — together we made this DXpedition possible! Thank

you to all of our commercial sponsors for their contributions and for their equipment donations. And thank you 32,223 times to everyone who called us for giving us an experience we'll never forget!

**Table 1 — JW0X/JW100QO
Most-Worked Countries**

Out of 32,223 contacts, 12,996 were made on 20 meters.

Country	Percentage of Contacts
United States	21.8%
Germany	9.7%
Japan	8.5%
Italy	7.7%
European Russia	6%
Belgium	4.7%



[Click here to watch the JW0X/JW100QO DX Adventure team tell the story of their DXpedition through video.](#)



[Click here to view a slideshow of additional photos from this DXpedition.](#)

All photos provided by the author.

Max Van Rymentant, ON5UR, has participated in nearly 20 DX operations since 2001, either with a team or individually. He immensely enjoys contesting, and even though he doesn't always have the time, he tries to participate often as OR1X. Max can be reached at info@maxi-print.be.

For updates to this article, see the **QST Feedback** page at www.arrl.org/feedback.



CQ CQ CQ: A Ham Radio Crossword Puzzle

April fun, with a radio theme.

Colin Phoon, AE3A



Play online at www.crosswordlabs.com/view/cq-cq-cq-a-ham-radio-crossword-puzzle.
Note: the puzzle layout differs in the online version.

Across

1 Spatial Web standard enabling interoperable hardware-software connections (abbrev.)

5 "Speed" of an engine (abbrev.)

9 Puppy sounds

13 Common lot size

14 QRN or QRM

15 Pass this to get your license!

16 "Far-out" amateur communications type

18 I-35 in Kansas, I-90 in Massachusetts, I-44 in Oklahoma, and I-76 in Pennsylvania (abbrev.)

19 What a guy does for a tower — or a radio net — in an emergency

20 Old-fashioned "go quickly"

21 Kudos with clinks

22 Skip, Reverse, Draw Two, or Wild

26 ____ de Forest, inventor of the triode vacuum tube

27 Not quite a ragchew


28 Don't stub this on your boat anchor!

29 Higher ones are more skin-protective on ARRL Field Day (abbrev.)

32 To treat one's radio gear poorly

33 Ed White accomplished this US space first (abbrev.)

34 An anonymous VPN protocol

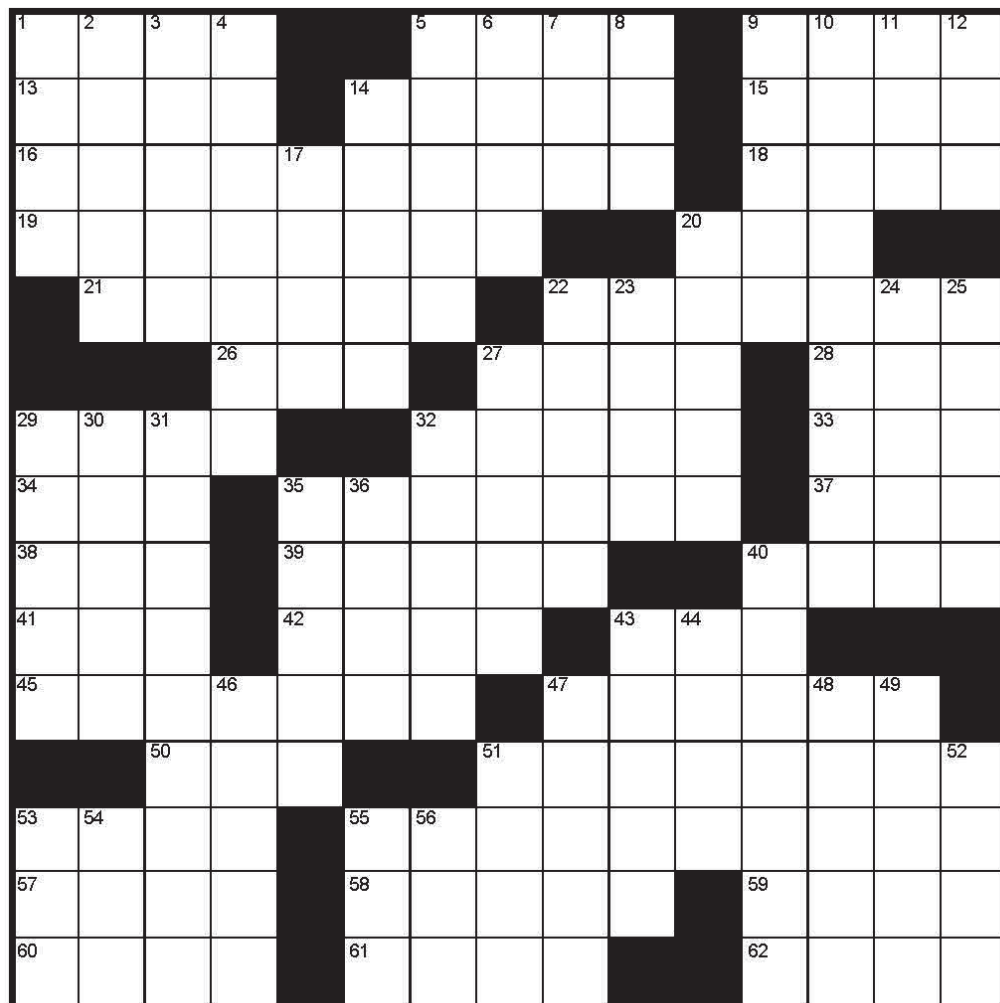

35 Class of license, or perhaps an operator at W2KGY?

37 Upper bound of safe exposure as defined by NIOSH

38 Ginger ____, a popular soft drink

39 The "U" in UHF

40 Helper (abbrev.)

41 Where to find answers on the Web, or in a specs manual (abbrev.)

42 Certain experienced IBM programmers

43 This provides in-circuit debugging functionality in CPUs (abbrev.)

45 "Above the ____ plain!"

47 A naval petty officer

50 Hare of ARRL and Snyder of W1YU

51 A multiple of your operating frequency

53 Algeria, Egypt, Iraq, Jordan, and Qatar belong to this region, according to the UN

55 40 meters, 2 meters, or 70 centimeters

57 Label (your equipment with a fine drill or laser)

58 When two waves are synced and the same, they are in ____

59 Professional association for certain engineers (abbrev.)

60 ____ Vac batteries

61 High-acuity hospital care area (abbrev.)

62 The National Association for Amateur Radio in the US

Down

- 1 Amateur radio operators, colloquially
- 2 Ten-Tec made a model 555 of this popular rig
- 3 A kind of ducting on VHF and UHF
- 4 Letter-writing friends
- 5 Defeats badly
- 6 Those tiny things that plug into boards
- 7 Graduate degree in STEM
- 8 To catch sight of
- 9 Poor location to string up your antenna
- 10 Radio relay stations
- 11 Modulation of a carrier freq. in discrete steps
- 12 Official program name of the space shuttle (abbrev.)
- 14 Dirección de Argentina a Estados Unidos
- 17 Popular speaker brand

- 20 ITU phonetic alphabet word for "H"
- 22 Communications officer on the USS *Enterprise*
- 23 US government space program
- 24 Operates portable across grid squares
- 25 Handed out, as cards
- 27 Ham operators' "cousins," with their own bands
- 29 Workers
- 30 Relating to the northern-most or southern-most regions on Earth
- 31 "QRZ, is the _____ in use?"
- 32 Started the poker pot
- 35 These can take your antenna down
- 36 "When All _____ Fails®"
- 40 Nitrogenous compound in fertilizer

- 43 "Uncle Miltie" on old radio programs
- 44 Common sight on observatories or cathedrals
- 46 State in "7" territory
- 47 Major manufacturers Icom, Kenwood, and _____
- 48 Ire
- 49 Salt peter
- 51 System that warms or cools indoor spaces (abbrev.)

- 52 Canadian slang for the NHL, or character in "The Road to El Dorado"
- 53 Sea, in "F-land"
- 54 Greek letter denoting the efficiency of a system, in electronics
- 55 CW speed (abbrev.)
- 56 Yellowfin in "KH6-land"

See page 93 for the answers!

Colin Phoon, AE3A, was first licensed as WB3GUZ in 1977. He operated at his school radio station, WA3ALW, under the tutelage of Jim Shea, W3MO. Colin's ham family includes his father-in-law, Barry, K2JV (SK); his brother, Kelvin, K13Z, and his son, Gordon, KC2SRY. Colin is a clinical pediatric cardiologist active in teaching and research, and he has published more than 100 papers and book chapters, as well as a textbook. He enjoys low-power CW, but he admits to spending far more time doing crossword puzzles. Colin started constructing crossword puzzles in 2021 and still considers himself a "newbie." He can be reached at ae3a@arrrl.net.

For updates to this article, see the **QST Feedback** page at www.arrrl.org/feedback.

VOTE

If you enjoyed this article, cast your vote at www.arrrl.org/cover-plaque-poll

April 2024 Frequency Measuring Test

There will be two transmitting stations for the April Frequency Measuring Test (FMT) — W8RKO in Ohio and K5CM in Oklahoma. Transmissions will be made on 40 and 80 meters (in that order). The FMT will start with a "call up" by K5CM at 0300 UTC on April 24 (Tuesday evening in North America). If the scheduled frequency is busy, transmissions will be on frequencies close to the published frequency, so be prepared to tune.

Measure the transmitted frequency and report your results at <http://fmt.arrrl.org>. Results must be submitted by 0200 UTC on April 27, at which time they'll be published on the website. Stations submitting measurements within ± 1 Hz for all transmissions from K5CM or W8RKO will be listed in the "Green Box" of the results.

Although the call up is scheduled to start at a specific time, both stations will try to start earlier. Every effort will be made to start key down at the published time. The call-up period will last 4 minutes, one minute longer than usual, and the key-down period will be 1 minute.

K5CM

40 meters near 7064 kHz
03:00 Call up
03:04 Key down
03:05 End 40-meter run

W8RKO

40 meters near 7065 kHz
03:15 Call up
03:19 Key down
03:20 End 40-meter run

K5CM

80 meters near 3598 kHz
03:30 Call up
03:34 Key down
03:35 End 80-meter run

W8RKO

80 meters near 3599 kHz
03:45 Call up
03:49 Key down
03:50 End 80-meter run

Arizona Hams Hit Their Local Parks



A relaxed group of Hams in Parks (HIP) have fun operating portable.

Gary Laatsch, KI7PBR

The BE-HIP group was born out of COVID-19. Many of us are part of the Chandler Ham Radio Club in Arizona, founded in July 2019. The pandemic halted most events we were planning. After several months of no interaction, a couple of members decided to go out to a local park for Winter Field Day 2021. In a park we could practice social distancing and abide by CDC guidelines. More than 20 hams showed up. It was so successful that we decided to start doing it once a month to get out of the house.

We are not competing or setting up in POTA-registered parks; we are just hams in the park, so our name, “Hams in Parks (HIP),” was born, and we evolved to “BE-HIP” to be catchy. Our events are usually scheduled on the third Saturday of the month, from October through April. BE-HIP provides a means to reach out to

the general public, who often stop by one of our several stations and ask us questions about who we are and what we are doing. In addition to the regularly scheduled BE-HIP events, we spontaneously meet up because the weather is nice and out of love for the hobby. We are still going strong more than 3 years later.

Operating

Most of us can set up our stations and be on the air in less than 30 minutes. At most BE-HIP events, seven or eight operators set up their portable stations, and the rest are curious to see what do-it-yourself projects we have put together. The events are also for socializing, as well as a place to exchange technical information. Because we are not competing or keeping logs to score points, most of us are content with making a couple of contacts, which lets us know our latest change or new piece of equipment is functional. We also communicate

within the park via our handhelds to coordinate what band and mode we will be focusing on that day, to reduce interference between our stations. We space ourselves around the park to create separation between our stations for the same reason. It has worked out very well. We have no particular mode of operation. Some of us activate on SSB or digital modes such as FT8, and many of us operate CW.

Equipment

There is no typical setup that we use; everyone has slightly different stations. We use everything from Elecraft KX2s and Yaesu FT-891s to Xiegu G90s. I started with a Xiegu G90, a home-built battery box with a Bio-enno Power 12 V 12 Ah battery, and a multi-band (up to 40 meters) end-fed half-wave (EFHW) wire strung across two telescoping fiberglass masts. The feed point was 20 feet high, and the end point was about 30 feet high. I discovered the 66 feet required for the EFHW was a bit challenging for me in local parks, and I started looking for an alternative. One of the regulars, Lee, N7LP, was using his Summits on the Air box, which has an off-center vertical dipole on a single telescoping mast. I built a similar antenna and used it at the next event. It worked well and required only a single mast. I continued to look at other quick setup solutions, and I now use a vertical end-fed random wire connected through a 9:1 unun that I built. Some of us use the old “toss a wire into a tree” method in more of an inverted V configuration.

Recently, I upgraded to the Yaesu FT-891 and paired it with an LDG Z-11 Pro II antenna tuner. This setup works well for park activations and allows me to run low power at 5 W up to a low-power max of 100 W. I was portable for a recent Ten-Ten International event and managed 10-meter SSB contacts to Hawaii and Scotland. One of our other members ran CW and had several European contacts.

A Small Community

Our members' experience levels vary from Technician to Extra-class licensees and from brand-new operators to several operators with more than 30 years of experience. We always help each other when needed and when questions or setup problems occur, and we share equipment to enable portable setups or improve them. We have paired several of our Technician members with upper-level operators to work HF for the first time. This, of course, helps motivate them to become General- and Extra-class operators.

We encounter more and more people in local parks, and they often stop and ask us what we are doing. When we explain that we are amateur radio operators,



Mark, N2IU, working his Elecraft KX2 setup. [Gary Laatsch, KI7PBR, photo]



Bert, K7DIP, and Bruce, KK7HTE, using the discone antenna at the Titan Missile Museum. [Sue Moore, photo]

quite often, we get the response, “Oh, is that still around?” Several dormant operators have stopped by and said, “I need to get back on mine. It’s been years.” We have also encouraged several non-licensed people to join the hobby.

BE-HIP events are open to all who are interested in and curious about amateur radio and portable setups. We don’t have plans to become a club. We are simply local ham radio operators who love to be outdoors and do what we love most. Basic ham radio is alive and doing well in the parks in Chandler, Arizona. If you’re scanning the bands and hear “CQ CQ CQ BE-HIP Chandler, Arizona,” be sure to respond and give us a simple RST report — and a 5- to 10-minute chat wouldn’t be a bad idea either.

For more information, join our www.groups.io email reflector, BE-HIP, or look us up on Facebook under the same name. Updates on upcoming meetup events are always posted there.

Lead photo by the author.

Gary Laatsch, KI7PBR, is a retired electrical engineer and firm-ware architect. He retired in 2016 after working at R&D Labs for nearly 40 years. Gary worked for several leading-edge high-tech companies, including Beckman Coulter, Western Digital Technologies, Inc., and Intel. He was granted a patent in 2002 for a caching algorithm used in digital video recording technology. Gary became interested in amateur radio in the early 1980s when he discovered the 2-meter Earthquake Net in Southern California. He finally became a Technician in July 2017. That September, Gary upgraded to General, and then to Extra class in December 2018. He is the co-founder and former president of the Chandler Ham Radio Club. Gary is also a certified VE for ARRL and the Laurel Amateur Radio Club, and is part of the monthly VE team in the Chandler area. He can be reached at ki7pbr@cox.net.

For updates to this article, see the **QST Feedback** page at www.arrl.org/feedback.



Congratulations

January 2024
QST Cover Plaque Award Winner

*Thomas W.
Brooks, KE1R*

In his article, “FT8 Visualized,” Tom explores the makeup of FT8 and explains the basics of error correction.

QST Cover Plaque Awards are given to the author or authors of the most popular article in each issue. *You* choose the winners by casting your vote online at

www.arrl.org/cover-plaque-poll

Log in now and choose your favorite article in this issue!

FT8 Visualized

KE1R provides an overview of the structure and intricacies of FT8.

Thomas W. Brooks, KE1R

Data streams are nothing new, and neither is error correction. We stream data all the time with our cell phones, computers, and other devices. CW is a data stream, as are RTTY and PSK31. In this article, I will explore the general makeup of FT8 and explain the basics of error correction. A list of references that I consulted for this article is provided at www.arrl.org/qst-in-depth.

In 2001, Joe Taylor, K1JT, released WSJT; this changed the ease with which hams could interface transceivers with computers and experiment with weak-signal modes. Next came the release of WSJT-X in 2012, followed by FT8 in 2017. FT8, which limits messages to 13 characters, uses a 15-second cycle with a 50 Hz bandwidth. FT8 was initially created by Joe Taylor and Steve Franke, K9AN, for 6-meter E-skip propagation. In 2019, FT4 was added, with a 7.5-second cycle and a 90 Hz bandwidth.

I was curious about FT8 waterfall data streams and how they are structured (see Figures 1 and 2). Without delving too far into data communication theory and error correction techniques, I will offer some knowledge to help hams visualize such data streams and learn how they are generated and used.

You can look at a simple sudoku puzzle to understand error correction (see Figure 3). For those who are unfamiliar with sudoku puzzle rules, each of the four small 2 × 2 matrixes must contain 1, 2, 3, and 4. Additionally, each column and row of the larger 4 × 4 matrix must also contain 1, 2, 3, and 4. This structure is similar to how low-density parity check (LDPC) coding works. That is, it enables you to find and correct errors when you look at a completed matrix.




Figure 1 — The standard WSJT FT8 waterfall display.




Figure 2 — An Icom IC-7610 waterfall display. This shows what the yellow blocks of data in Figure 1 look like when vertically spread.

2				2				2	3			2	1	3	4
	2				2			4	2			4	3	2	1
3	4		2	3	4	1	2	3	4	1	2	3	4	1	2
	2	3	1	1	2	4	3	1	2	4	3	1	2	4	3

Figure 3 — A simple 4 × 4 sudoku puzzle.

Get On the Air April 8 for the Solar Eclipse QSO Party

Contribute to ionospheric research while having fun on HF.

McKenzie Denton, KO4GLN

An extraordinary celestial event is set to occur over North America on Monday, April 8, 2024, where the sun and moon will align in a total solar eclipse! This date marks the next Solar Eclipse QSO Party (SEQP) for hams interested in HF operating or contributing to studies of the ionosphere (or both). Sponsored by Ham Radio Science Citizen Investigation (HamSCI, <https://hamsci.org>), the SEQP invites amateur radio operators to participate in an ionospheric research initiative, transforming routine radio exchanges into valuable scientific data. Operators of all experience levels, with stations small and large, are invited to make contacts on a variety of modes and bands during the SEQP. The contact data will help researchers unravel the mysteries of our planet's upper atmosphere and its interactions with the sun.

An Opportunity to Contribute to Radio Science

The 2024 SEQP is an event that no serious amateur radio enthusiast should miss because it's the last total solar eclipse visible from the contiguous United States until 2044. This event is a unique blend of scientific pursuits and radiosport. Amateur radio operators will have a chance to experience the changes to radio wave propagation when the moon's shadow temporarily reduces the amount of solar radiation reaching the ionosphere during the eclipse. This initiative is not just about radio contacts; it's also about building a vast repository of data relative to the time of the eclipse passing overhead, such as who contacted whom and when, where they were located, and on which bands their contacts occurred. Networks, such as the Reverse Beacon Network, PSKReporter, and WSPRnet, along with individual logs, will yield invaluable insights into the ionosphere's behavior to researchers. This event could be a transformative moment for amateur radio enthusiasts and scientific discoveries.



Paul Christy, N0GN, operated during the 2017 SEQP using solar power from the Rockford Lake State Recreation Area in Beatrice, Nebraska. [Denise Christy, KE0MVM, photo]

Amateur radio operators will submit logs that contain details such as frequency, mode, contact times, and signal reports to the HamSCI team after the SEQP. This information will be combined into a comprehensive database for preliminary analysis, which ensures completeness and consistency and identifies any anomalies. Then physicists, engineers, and other scientists collaborate to analyze this data pool rigorously. The focus is to observe the ionosphere's reaction to the solar eclipse by identifying shifts in signal propagation. Integrating the data with other sources, such as the Reverse Beacon Network, PSKReporter, WSPRnet, and other (non-amateur) data sources, can achieve a more detailed understanding of the ionosphere. The findings will be shared at conferences, published in scientific journals, and made available to the public, thus advancing global knowledge about the ionosphere and its impact on radio communications.

HamSCI's Recognition of Hams' Contributions to Science

As the solar eclipse nears, it's essential to acknowledge the valuable contributions of amateur radio op-



Denise Christy, KE0MVM, pictured at the campsite she shared with her husband, Paul Christy, N0GN, at the Rockford Lake State Recreation Area in Beatrice, Nebraska, during the 2017 SEQP. [Paul Christy, N0GN, photo]

erators in scientific exploration. Amateur radio has played a crucial role in advancing scientific knowledge for years, offering vital communication support and accurate data from the early days of radio. The upcoming eclipse is more than just a fascinating celestial event; it's a testament to the significance of amateur radio in scientific research. HamSCI's involvement highlights the importance of the data collected by amateur radio, validating its role in the scientific community.

As HamSCI continues to integrate and validate these contributions, it calls all amateur radio operators to be part of this momentous occasion. Operating in this event signifies more than personal achievement; it represents a collective effort in scientific discovery, where each contribution is a valuable piece of a much larger puzzle. Step into this event ready to contribute to a legacy that HamSCI and the scientific community deeply value with a sense of pride and purpose.

The HamSCI community is led by The University of Scranton Department of Physics and Engineering Amateur Radio Club, W3USR, in collaboration with Case Western Reserve University Amateur Radio Club, W8EDU, The University of Alabama, the New Jersey Institute of Technology Center for Solar-Terrestrial Research Amateur Radio Club, K2MFF, the MIT Haystack Observatory, Tucson Amateur Packet Radio in Arizona, additional collaborating universities and institutions, and volunteer members of the amateur radio and citizen science communities. We are grateful for the financial support of the United States National

Operate in the SEQP

Date and Time:

- April 8, 2024
- 1400 to 2400 UTC (may operate all 10 hours)

Station Requirements:

- Remote operation allowed with conditions
- Portable operation from a fixed location is encouraged (no mobiles or rovers)

Bands and Modes for Two-Way QSOs:

- Bands: 160, 80, 40, 20, 15, 10, and 6 meters
- Modes: CW, SSB, and digital (all types)

Exchange for Two-Way QSOs:

- Include signal report and 4-character grid square

Transmitting Digital Modes:

- Recommend *N1MM+* software with *WSJT* for FT8
- Configure software with station location into a 4-character grid square
- Enable PSKReporter to send received signal data

Scoring:

- Based on QSO points, multipliers, and bonus points (see rules, <https://hamsci.org/seqp-rules>)
- Duplicate contacts allowed after 10 minutes
- Cabrillo-formatted logs preferred, though ADIF logs, such as from *WSJT*, will be accepted

FAQs and complete contest rules can be found at <https://hamsci.org/contest-info>.

Science Foundation, NASA, and Amateur Radio Digital Communications. If you have questions regarding the SEQP or to learn more about HamSCI's many other eclipse-related events, please visit <https://hamsci.org/eclipse>.

McKenzie Denton, KO4GLN, is a fervent science enthusiast and pre-med student at Old Dominion University. She is President of the ODU Amateur Radio Club. McKenzie was first licensed in 2020 and is now an Amateur Extra-class operator and Volunteer Examiner. Her profound passion for science has steered McKenzie to be a key member of the HamSCI team. She is active in the amateur radio community and involved with the Williamsburg Area Amateur Radio Club (WAARC) and the Potomac Valley Radio Club (PVRC). McKenzie is the ARRL Virginia Section Youth Coordinator, dedicating her efforts to inspiring young enthusiasts. She can be reached at mckenziedenton15@gmail.com.

For updates to this article, see the **QST** Feedback page at www.arrl.org/feedback.



ARRL Board Holds 2024 Annual Meeting

The Annual Meeting of the ARRL Board of Directors was held on January 19 – 20, 2024, in Windsor, Connecticut.

ARRL President Rick Roderick, K5UR, led the meeting with a moment of silence for the radio amateurs who passed away since the previous Board meeting. Among the Silent Keys remembered were Thomas Ciciora, KA9QPN; John Core, KX7YT; David Lee Coons, WT8W; Marty Engstrom, Jr., N1ARY; Arnold Sexe, WB0OPZ; Gary Wilson, WD8CBO; John Gohndrone, N7TT; Mitch Wolfson, K7DX; Paul Staupe, W0AD; Ray Richards, W4RPR; Sister Lauren Weinandt, WA0RRJ; Stephen Howard, AB0XE; Stephen Merchant, K6AW; Steve Crouch, NO7V; William Kent, W0PCP; Richard King, K5NA; George Taft, W8UVZ; Carl Gansen, WB0CFF, and Elmer Berg, KC0NGY.

Report Highlights

Board members discussed proposed changes to By-Law 46, the Board's Conflict of Interest Policy. They unanimously voted to approve the establishment of a committee appointed by the ARRL President to affirm the set of ethics guidelines and standards for the Board. In addition to the guidelines, the committee will review By-Laws 42 (Ethics and Elections Committee) and 46 for possible revision. The committee will also engage with a legally qualified

independent third party to handle all Ethics and Elections inquiries in the future.

The Board voted to make the *ARRL Director Workbook* publicly available on the ARRL website after revisions have been made to update the document.

The Board approved the reintroduction of an ARRL Life Membership and a 70+ Life Membership (for members age 70 and over) on a revenue-neutral basis. The Board had suspended the Life Membership Program, pending the approval of an adjusted revenue-neutral program at the July 2023 meeting.

The Board approved two motions to engage young hams with a strong start to their lifelong journey in amateur radio and ARRL. For decades, ARRL has offered a reduced dues rate for young hams, currently priced at \$30 per year. At this meeting, the Board established a new option for a no-cost Associate Membership for full-time students age 21 and younger. The Board also approved the creation of the ARRL Student Coding Competition, which will challenge students age 21 and younger to design a software application that meets the specifications



ARRL Officers prepare to start the meeting of the Board of Directors.

established by ARRL. Awards up to a total of \$25,000 will be granted by an awards committee to the winning student(s). The committee will determine the terms and schedule for the competition.

The Board approved a commitment to expand messaging and marketing for the ARRL Amateur Radio Emergency Service® (ARES®) program at the recommendation of the Emergency Communications and Field Services Committee, with the goal of recruiting and developing greater participation.

Government Relations

The Board issued its strongest rebuke of efforts by the ad hoc group Shortwave Modernization Coalition (SMC) to introduce high-power signals to the shortwave spectrum, including frequencies immediately adjacent to the amateur radio HF bands. The Board made a clear statement that the interests of the SMC conflict with those of ARRL, and its membership has requested that ARRL Volunteer Monitors explore ways to gather data on SMC station emissions.

The Board voted to expand ARRL's ongoing efforts to help hams who face involuntary limitations with their amateur radio operations beyond the regulatory efforts pursued in Washington, DC.

ARRL Foundation

ARRL Foundation President David Norris, K5UZ, presented a report about the status of the Foundation, which marked its 50th anniversary last September. The Foundation provides philanthropic support for amateur radio through the ARRL Foundation Scholarship Program and Club Grant Program, and other grants and funds. In 2023, the Foundation awarded 113 scholarships totaling more than \$600,000 through the generosity of individuals and clubs. Norris also recognized the generous commitment made by Amateur Radio Digital Communications (ARDC), which will fund more than \$2.1 million over 3 years, to support scholarships, radio technology for classroom teachers, and amateur radio club grants.

Elections

Officers

The Board re-elected ARRL President Rick Roderick, K5UR, for his fifth 2-year term. The Board also elected Pacific Division Director Kristen McIntyre,

K6WX, as First Vice President, succeeding Michael Raisbeck, K1TWF. Northwestern Division Director Mike Ritz, W7VO, was elected Second Vice President, succeeding Bob Vallio, W6RGG. International Affairs Vice President Rod Stafford, W6ROD, was re-elected.

The elections of McIntyre and Ritz to the Vice President positions mean that incumbent Vice Directors Anthony Marcin, W7XM, of the Pacific Division, and Mark Tharp, KB7HDX, of the Northwestern Division, will succeed as Division Directors, creating vacancies for Vice Director in those Divisions. Michael Sterba, KG7HQ, has been appointed Vice Director of the ARRL Northwestern Division. The position of Vice Director of the ARRL Pacific Division will also be filled by appointment.

Executive Committee

First Vice President Kristen McIntyre, K6WX, will remain on the Executive Committee (EC), succeeding former Vice President Michael Raisbeck, K1TWF. Directors re-elected to the EC include Jim Boehner, N2ZZ, of the Roanoke Division, Fred Kemmerer, AB1OC, of the New England Division, and Art Zygielbaum, K0AIZ, of the Midwest Division. Newly elected members include Jeff Ryan, K0RM, of the Rocky Mountain Division, and Bill Lippert, AC0W, of the Dakota Division.

Finances

ARRL Treasurer John Sager, WJ7S, reviewed the fourth quarter and full-year investment results of 2023. The fourth quarter had a return of \$3.03 million, or 9.1%. In 2023, the ARRL portfolio had a return of \$4.7 million, or 14.4%. The balance of ARRL investment assets was \$35.7 million as of December 31, 2023, which includes approximately \$16 million in Board-controlled assets.

ARRL Chief Financial Officer Diane Middleton, W2DLM, stated that ARRL had a deficit spending of approximately \$1.3 million from operations in 2023. She noted that revenues remained relatively flat, with increases in most expenses across the organization. The balance sheet remained healthy, with some growth due to the partial investment market recovery.

The next meeting of the ARRL Board of Directors is scheduled for July 19 – 20, 2024.

US Amateur Radio Bands

Operator license classes: **E** = Amateur Extra **A** = Advanced **G** = General **T** = Technician **N** = Novice
CW operation is permitted throughout all amateur bands. Except as noted, all frequencies are in megahertz (MHz).

■ = RTTY, data, phone, image
 ■ = USB phone, RTTY, data and CW
 ■ = RTTY and data
 ■ = phone and image
■ = SSB phone
 = CW only

LF – Low Frequency band

2200 Meters (135 kHz) E,A,G 1 W EIRP maximum



Amateurs wishing to operate on **2200 or 630 meters** must first register with the Utilities Technology Council online at <https://utc.org/plc-database-amateur-notification-process/>. You need only register once for each band.


630 Meters (472 kHz) E,A,G

5 W EIRP max, except in Alaska within 496 miles of Russia where the limit is 1 W EIRP




MF – Medium Frequency bands

160 Meters (1.8 MHz) E,A,G




HF – High Frequency bands

80 Meters (3.5 MHz) E,A,G,T,N

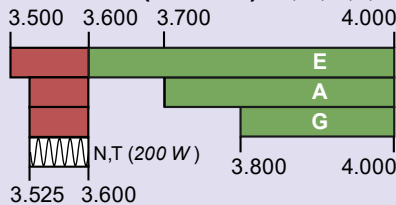


60 Meters (5.3 MHz) E, A, G (100 W)

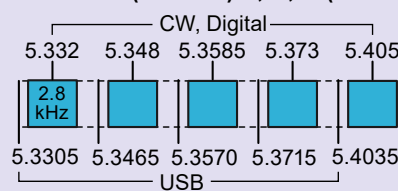

General, Advanced, and Extra licensees may operate on a secondary basis with a maximum ERP of 100 W (relative to a half-wave dipole antenna).

40 Meters (7 MHz) E,A,G,T,N

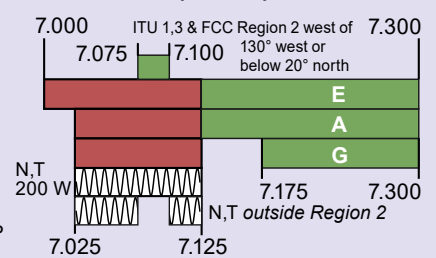


30 Meters (10.1 MHz) E,A,G




20 Meters (14 MHz) E,A,G




17 Meters (18 MHz) E,A,G




15 Meters (21 MHz) E,A,G,T,N

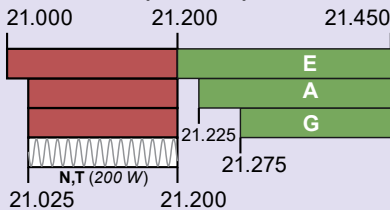

12 Meters (24 MHz) E,A,G




10 Meters (28 MHz) E,A,G,T,N

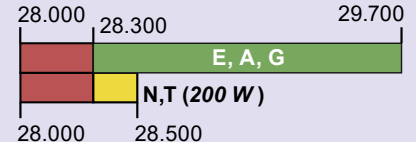

VHF – Very High Frequency bands


6 Meters (50 MHz) E,A,G,T



2 Meters (144 MHz) E,A,G,T



1.25 Meters (222 MHz) E,A,G,T,N



UHF – Ultra High Frequency bands


70 cm (420 MHz) E,A,G,T



33 cm (902 MHz) E,A,G,T



23 cm (1240 MHz) E,A,G,T,N

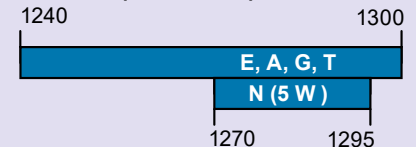

SHF&EHF – Super and Extremely High Frequency bands

All licensees except Novices are authorized all modes on the following frequencies:

2300-2310 MHz	3300-3450 MHz	10.0-10.5 GHz	47.0-47.2 GHz	122.25-123.0 GHz	241-250 GHz
2390-2450 MHz	5650-5925 MHz	24.0-24.25 GHz	76.0-81.0 GHz	134-141 GHz	All above 275 GHz

See www.arrl.org/band-plan for detailed band plans.

Copyright © ARRL 2023
OTAbands rev. 11/16/2023

Amateur Radio Represented as Educational Tool in Washington, DC

ARRL and Amateur Radio Digital Communications (ARDC) represented amateur radio at a symposium in Washington, DC, on February 1, 2024. At this symposium, top domestic spectrum policymakers from the federal government considered implementation of the National Spectrum Strategy (NSS). For more information about the NSS, see www.ntia.doc.gov/sites/default/files/publications/national_spectrum_strategy_final.pdf.

ARRL ensures that amateur radio is represented at sessions like this so that decision-makers understand amateur radio's roles when spectrum decisions are made. Such roles include creating student interest in science, technology, engineering, and mathematics (STEM) subjects, and providing communications during natural disasters and other emergencies.

In the NSS, which was released by the White House in November 2023, national policymakers identified 2790 MHz of spectrum to be considered for future commercial needs. No new amateur spectrum was included, and only the ongoing reallocation studies related to 3.1 – 3.45 GHz were addressed.

The NSS was prepared for the President by the National Telecommunications and Information Administration (NTIA) in collaboration with the Federal Communications Commission. NTIA considered input from federal executive branch agencies that use spectrum, in addition to input from other spectrum users, including amateur radio operators. As the NSS was being formulated in 2023, ARRL's Washington Counsel presented information about amateur radio to policymakers at an NTIA listening session. This was followed by a written submission about amateur radio spectrum concerns and a one-on-one meeting with NTIA's Senior Spectrum Advisor, who was overall in charge of formulating the NSS.

The February 2024 symposium followed the release of the NSS and supported finalizing NSS implementation plans; as of press time, the plans are expected to be announced by the White House in mid-March 2024.

ARRL Life Member and ARDC Director and former President Phil Karn, KA9Q, was a panelist at the symposium. He reinforced amateur radio's national role in workforce development, with personal testimony based on his own career at Qualcomm.



Phil Karn, KA9Q (far right), represented amateur radio in the National Telecommunications and Information Administration spectrum symposium. [BOC Engineering YouTube photo]

Karn's recruitment by Qualcomm was due to his pioneering amateur radio accomplishments and digital wireless projects. He retired from his position as Qualcomm's Vice President for Technology in 2011. Karn's life experience also supported his remarks about amateur radio's role in attracting youth to STEM projects.

"I see [amateur radio] — having been involved in it for 52 years now — as fundamental as an educational system... It is a type of hands-on, intuitive learning that is almost impossible to get any other way," said Karn. You can watch a recording of the panel at www.youtube.com/watch?v=NaaFb6Sh61E&t=21090s.

Senators Roger Wicker and Richard Blumenthal Introduce S.3690 to Eliminate Private Land Use Restrictions on Amateur Radio

On January 30, 2024, US Senators Roger Wicker (Mississippi) and Richard Blumenthal (Connecticut) introduced S.3690, the Senate companion bill to H.R.4006, introduced in June 2023. Both bills reflect ARRL's congressional campaign efforts to eliminate homeowner association land use restrictions that prohibit, restrict, or impair the ability of an amateur radio operator to install and operate amateur station antennas on their residential properties.

Amateur radio operators are repeatedly relied upon to provide essential communications when disaster strikes, but their ability to do so is being impaired by the exponential growth of residential private land use restrictions. Such

restrictions hinder the ability to establish home stations that can be used to train and provide emergency communications when needed. When announcing the introduction of S.3690, Senator Wicker said:

Because communication during natural disasters is often hindered, we should be making every attempt to give folks more options. Reliable access can make the difference between life and death in an emergency. Our legislation removes roadblocks for amateur radio operators looking to help their friends, families, and neighbors.

In a similar announcement, Senator Blumenthal stated:

Our measure will help clarify the rules so ham radio enthusiasts can successfully continue their communications. In the face of emergency or crisis, they help provide vital,

life-saving information that allows listeners to properly and safely respond, but prohibitive home association rules and confusing approval processes for installing antennas have been an unnecessary impediment. The Amateur Radio Emergency Preparedness Act resolves these bottlenecks and ensures that radio operators can function successfully.

ARRL President Rick Roderick, K5UR, and ARRL Government Affairs Committee Chair and Director of the ARRL West Gulf Division John Robert Stratton, N5AUS, both extended their thanks on behalf of ARRL, its members, and the amateur radio community. They voiced their appreciation for the leadership of Senator Wicker and Senator Blumenthal in their efforts to support and protect the rights of all amateur radio operators.

Highlights from 2024 HamCation®

Warm weather greeted the crowds of radio amateurs who attended the 2024 Orlando HamCation® on February 9 – 11. The convention hosted the ARRL Florida State Convention, but it drew attendees from across the country, and some from even farther, thereby renewing HamCation's reputation as the second-largest US ham radio convention.

HamCation is sponsored by the Orlando Amateur Radio Club (OARC). The convention sprawled across the Central Florida Fairgrounds and Expo Park, and it included a huge outdoor tailgate and buildings filled with exhibitors and swap tables. The convention enjoys significant participation from amateur radio manufacturers, dealers, clubs, and organizations. In the months leading up to this year's event, HamCation International Relations Co-Chairs Lidy Meijers, KJ4LMM, and Peter Meijers, AI4KM, traveled to ham radio conventions across Europe to cast a spotlight on the convention. Their work paid off by garnering an attendance of amateurs from many other countries, and even by attracting exhibitors from international societies, including the Radio Society of Great Britain and the Deutscher Amateur Radio Club.

"It was very successful and very busy," said OARC President John Knott, N4JTK. "The vendors reported that traffic at their booths was high and both the trunk fest and the flea market were busy." Knott also said that reservations filled 200 RV spaces.

The East-West Hall included a row of booths organized by ARRL. Attendees had the opportunity to meet ARRL President Rick Roderick, K5UR; ARRL CEO David Minster, NA2AA, and Director of the ARRL Southeastern Division Mickey Baker, N4MB. Baker also moderated the ARRL membership forum on Saturday afternoon during the event. Together, Baker, Roderick, and Minster cov-

ered several key areas of membership interest. Roderick, who asked attendees to consider what they've done for amateur radio lately, urged members to find opportunities to support new licensees and strengthen radio clubs.

Minster spoke about a new, free ARRL membership for students 21 and younger. He also described ways that ARRL is increasing amateur radio's role in education through teachers, students, and schools. "ARRL knows that amateur radio is an effective tool in developing student experiences in the science, technology, engineering, and math (STEM) disciplines," said Minster. "Our efforts to increase our outreach in education and other areas is playing a prominent role with the development of the new ARRL strategic plan."

Also at HamCation was ARRL Education and Learning Manager Steve Goodgame, K5ATA. Goodgame presented a forum covering recent efforts and success stories to develop pathways for more teachers and students to use amateur radio in their classrooms. His wife and member-volunteer Cyndi Goodgame, K5CYN, who is also an educator, engaged dozens of young and prospective hams by collecting their experiences and interests for ARRL's ongoing student outreach.

A familiar face to many was ARRL National Instructor Gordon West, WB6NOA. In January 2024, ARRL announced that it had become the new publisher of Gordon West's popular license preparation books and related resources. HamCation attendees were also drawn to the ARRL booths to meet Gordon West. He was introduced as ARRL National Instructor at the membership forum. On Saturday night, HamCation recognized Director of the ARRL New England Division Fred Kemmerer, AB1OC, and his wife, Anita Kemmerer, AB1QB, with the 2024 Gordon West Ambassador of the Year Award.

Bob Allphin, K4UEE, Silent Key

Prolific DXpedition leader, ARRL Maxim Society member, and former ARRL DX Advisory Committee Chair Robert C. "Bob" Allphin, Jr., K4UEE, has become a Silent Key. Allphin passed away on February 10, 2024, at the age of 79.



Prolific DXpedition leader, ARRL Maxim Society member, and former ARRL DX Advisory Committee Chair Robert C. "Bob" Allphin, Jr., K4UEE (SK).

Allphin was first licensed at the age of 14, and he graduated high school in Okinawa, Japan. He served in the US Air Force as an electronic warfare instructor during the Vietnam War. After an honorable discharge with the rank of Captain, Allphin entered the world of financial services. He retired after 28 years to focus on his passion for DXpeditions.

"Bob was always optimistic and hopeful in DXpedition planning. He encouraged and coaxed his fellow team members to bring out the best in everyone. If there were disappointments, he turned them into humor and diplomatically mitigated conflicts. He excelled in DXpedition PR and financing," said Ralph Fedor, KØIR, who frequently co-led DXpeditions with Allphin.

"Bob was very good at organizing and motivating people to participate," said Dr. Glenn Johnson, WØGJ, who co-led several DXpeditions with Allphin. "He was always thinking outside of the box. His concern was to put on the 'best show' possible and to work the hard-to-reach areas," said Johnson.

Iconic activations were Allphin's specialty. According to his QRZ page (www.qrz.com/db/k4uee/sk2024?aliasfrom=k4uee), Allphin participated in, led, or co-led DXpeditions to locations like the Howland and Baker Islands, Heard Island, Bhutan, and more. In all, he participated in 38 contest DXpeditions.

Allphin was a generous donor to ARRL, being honored as part of the President Class of the Maxim Society and a member of the Diamond Club. He was a major gift donor to the 2014 ARRL Second Century Campaign. "Bob leaves amateur radio with a legacy of accomplishments. Above all, he strove to do things well, do things right, and do things fairly," said Fedor.

Details about Allphin's many non-radio accomplishments may be found in his online obituary at www.dignitymemorial.com/obituaries/marietta-ga/robert-allphin-11663385. A photo memorial has been assembled by photographer Tom Roscoe, K8CX, at www.hamgallery.com/tribute/k4uee/index.html.

Section Manager Nomination Notice

To all ARRL members in Connecticut, Idaho, Minnesota, North Dakota, Ohio, Oklahoma, Southern Florida, Western New York, Puerto Rico, and the US Virgin Islands. You are hereby solicited for nominating petitions pursuant to an election for Section Manager (SM). Incumbents are listed on page 16 of this issue.

To be valid, a petition must contain the signatures of five or more full ARRL members residing in the Sections concerned. It is advisable to have a few more than five signatures on each petition. A sample nomination form is available on the ARRL website at www.arrl.org/section-terms-nomination-information. Nominating petitions may be made by facsimile or electronic transmission of images, provided that upon request by the Field Services Manager, the original documents are received by the manager within 7 days of the request. It is acceptable to submit signatures that have been sent via email or mail under the following guidelines: The petition copies must be made from the original form supplied by ARRL or downloaded from the ARRL website. The form must be exactly the same on both sides (i.e., autobiographical information should appear exactly the same on all copies). All forms/copies must be submitted together.

Candidates may use any of the available electronic signature platforms such as DocuSign, Dropbox Sign, and Signed PDF. Candidates who use an electronic signature platform to be nominated, as described above, do not have to send original paper copies of the nominating documents. The packet that is sent to ARRL Headquarters must be complete. Multiple files or emails for a single petition will not be accepted.

We suggest the following format:

(Place and Date)

Field Services Manager, ARRL
225 Main St.
Newington, CT 06111

We, the undersigned full members of the _____ ARRL Section of the _____ Division, hereby nominate _____ as candidate for Section Manager of this Section for the next 2-year term of office.

(Signature _____ Call Sign _____ City _____ ZIP _____)

Any candidate for the office of Section Manager must be a resident of the Section, an amateur radio licensee of Technician class or higher, and a full member of ARRL for a continuous term of at least 2 years immediately preceding receipt of a nominating petition. Petitions must be received at Headquarters by 4:00 PM Eastern Time on June 7, 2024. If more than one member is nominated in a single Section, ballots will be mailed from Headquarters no later than July 1, 2024, to full members of record as of June 7, 2024, which is the closing date for nominations. Returns will be counted on August 20, 2024. Section Managers elected as a result of the above procedure will take office October 1, 2024.

If only one valid petition is received from a Section, that nominee shall be declared elected without opposition for a 2-year term beginning July 1, 2024. If no petitions are received from a Section by the specified closing date, such Section will be resolicited in the October issue of QST. A Section Manager elected through the resolicitation will serve a term of 18 months. A Section Manager vacancy occurring between elections is filled through appointment by the Field Services Manager. — Mike Walters, W8ZY, Field Services Manager



WRC-23 Wrap-Up

In this month's column, International Amateur Radio Union (IARU) Secretary Joel Harrison, W5ZN, briefly reviews the handling of agenda item 9.1b at the International Telecommunication Union World Radiocommunication Conference 2023 (WRC-23). He also addresses pertinent agenda items discussed at the conference that were not widely reported by ARRL.

WRC-23, held in Dubai, United Arab Emirates, concluded on December 15, 2023. Amateur radio fared well despite enormous pressures.

At the top of the priority list for the IARU was agenda item 9.1b, which concerned the coexistence of the secondary amateur and amateur-satellite allocation with the primary radionavigation-satellite service systems from 1240 to 1300 MHz. Four years of strenuous effort in the run-up to WRC-23 resulted in an agreed-upon recommendation at the Radio Assembly, followed by an agreement at WRC-23 to mention the recommendation in a new footnote for the allocation. For more information about the conclusion of agenda item 9.1b, see the February 2024 "Happenings" column.

Other items relevant to the Amateur Radio Service were taken up at the conference, including:

- ◆ Agenda item 1.12: 40 – 50 MHz radar sounders. These are now largely limited to the polar regions.
- ◆ Agenda item 1.14: 231.5 – 252 GHz re-allocations for remote sensing. Fortunately, our secondary 241 – 248 GHz allocation remained un-



The WRC-23 IARU team included: (back row, from left) ARRL Technical Relations Specialist Jon Siverling, WB3ERA; Barry Lewis, G4SJH; Deutscher Amateur Radio Club Representative Bernd Mischlewski, DF2ZC; Radio Society of Great Britain Representative Murray Niman, G6JYB; IARU Secretary Joel Harrison, W5ZN; Wireless Institute of Australia Representative Peter Pokorny, VK2EMR; Singapore Amateur Radio Transmitting Society Representative Roland Turner, 9V1RT; (front row, from left) Radio Amateurs of Canada Representative Paul Coverdale, VE3ICV; Liga de Amadores Brasileiros de Rádio Emissão Representative Flavio Archangelo, PY2ZX; IARU President Tim Ellam, VE6SH; IARU Vice President Ole Garpestad, LA2RR; Organisasi Amatir Radio Indonesia Representative Wahyudi Hasbi, YB1PR, and Wireless Institute of Australia Representative Dale Hughes, VK1DSH. Not shown is Japan Amateur Radio League Representative Ken Yamamoto, JA1CJP.



changed, and the primary allocation of 248 – 250 GHz is unaffected.

◆ Agenda item 9.1a: This concerned the issue of space weather sensors, and it was an item of major interest. After much discussion, a clear definition for such sensors was formulated, and the subject of frequency protection was added as an agenda item for WRC-27.

◆ Agenda item 1.2: More broadband usage at 3.3 GHz and 10 GHz in Region 2. This was a complicated

issue because amateur services are secondary on these bands, with numerous — mainly South American — countries allocating mobile broadband in this spectrum by way of footnotes. Instead of a region-wide designation for International Mobile Telecommunications at 10.0 – 10.5 GHz in Region 2, there is a footnote limiting it to a dozen countries.

An Effective Team

IARU WRC Coordinator and Vice President Ole Garpestad, LA2RR, expressed his pleasure with the results and complimented the extraordinary effort of the dedicated IARU volunteers who worked long hours to achieve outcomes that will benefit all radio amateurs.

Public Service

Goals for ARES Growth and Development

At its Annual Meeting in January, the ARRL Board of Directors set a goal of recruiting and developing greater participation in the venerable Amateur Radio Emergency Service® (ARES®) based on a recommendation of its Emergency Communications and Field Services Committee. The Board established a commitment to expand messaging and marketing for the program.

Every ARES registrant and emergency coordinator (EC) should rally around this year's effort. The need for a vibrant, well-staffed ARES program has never been greater, given the rise in frequency of climate-related disasters and the severity of natural meteorological emergencies and disasters. The situation is exacerbated by understaffed and under-resourced local and state departments of emergency management, as well as the ever-increasing demand for volunteers.

Precursors to the ARES Program

More than a hundred years ago, hams attending colleges in Michigan and Ohio passed disaster messages when other means of communication were down during the aftermath of severe storms and flooding in that part of the country. A US Department of Commerce bulletin followed, proposing a dedicated communications network of radio amateurs to serve during disasters. They became essential auxiliary assets of the national public's welfare, and we've responded with emergency communications services ever since.

Around this time, a memorandum of understanding was set with the American railroad system for them to have amateur radio support whenever the railroad's wire lines were down, and the ARRL Railroad Emergency Service Committee was formed. A major New England flood had amateurs supplying the only efficient means of communication from the devastated areas to the outside world, prompting the chairman of the Federal Radio Commission (which became the Federal Communications Commission in 1934) to say that the future of radio depended on radio amateurs.

In 1933, ARRL Field Day was created to help amateurs prepare for portable operations. The ARRL Emergency Corps was formed with the goal of having an amateur radio emergency station in every community; similar goals are manifested today. The American Red Cross became a served agency. Technical advances supported this

evolution. There was even a World War II War Emergency Radio Service for natural disaster response. The Cold War resulted in the Radio Amateur Civil Emergency Service (RACES) for civil defense purposes and is the basis for today's emergency management model and ARES program.

Over the past 60 years, the roles, procedures, protocols, equipment, and techniques of amateur radio in emergency communications have continued to develop, thanks to advances in amateur radio technology and its application, as well as lessons learned through hotwashes and after-action reports and improvement plans from each and every incident. The need for amateur operators has never been greater, with training that has never been more professional and rigorous.

Recruitment Techniques

There's an infinite number of ways to recruit new ARES members. One of the most effective methods is to align local and county amateur radio clubs with ARES programs. In Florida, Columbia County EC Brad Swartz, N5CBP, has fostered an excellent working and cooperative relationship between the Columbia Amateur Radio Society (CARS) and the Columbia County ARES (CCARES). As a result, CCARES continues to grow in numbers and vitality through recruitment, exercises, and planning linked with CARS.



Columbia County EC Brad Swartz, N5CBP, at the helm of the amateur radio station at the Florida county's Emergency Operations Center.

Other methods include mailing recruitment flyers and newsletters to a county's amateur population. These mailings can be used to invite amateurs to meetings of the club and ARES group. Also, talk about the benefits of being an ARES volunteer on local repeater chat nets, swap nets, ARES nets, etc. Mailings can also include invitations to join county ARES exercises, general club activities and meetings, and to participate in public event responses. One of the best recruitment devices is a public event where new hams and veteran operators work side by side to provide radiocommunications for event leaders, public safety, and medical and law enforcement personnel. These events generate excitement, adventure, team spirit, and camaraderie in a public service environment.

Incident Communications Planning

In Columbia County, Florida, after a spate of various natural disasters, ARES leadership coordinated with the county's professional emergency manager to embrace more sophisticated planning as the critical key to efficient, effective, organized, and coordinated responses. This was recognized by the emergency manager when he recently devoted 90 minutes to a one-on-one planning and coordination meeting with county EC Swartz.

As a result, ARES meetings are held every month, and communications planning documents are more comprehensive in response to the more complex and demanding disaster management arena. Two good examples can be found in the drafting and publication of a new local county emergency communications plan and a simplex net protocol. The new 48-page document covers every aspect of responsibilities, protocols, alerting mechanisms, rosters, evacuation centers with addresses, frequencies and repeaters to be used for various functions, and much more.

A Directed Simplex Net Protocol

Because repeater systems sometimes go down during a disaster, the county ARES group has instituted a protocol for conducting voice communications using simplex operation — peer-to-peer communications without repeater use. On this net, the net control station (NCS) doesn't use a roster to call from. Instead, stations are asked to check in by suffix. For example, the NCS may call for stations with a suffix of Alpha through Golf, and the station KE4BQI could answer, but station KK4KSM couldn't check in until the NCS calls for stations with a suffix beginning with Hotel through November. If the NCS doesn't hear a station, another station that's able to copy the unheard station can write down that station's call sign and wait for the NCS to ask for relays. Then, the copying station would give their call sign and wait to be acknowledged. Once acknowledged, the station then gives the NCS the call sign using phonetics.

Generally speaking, for a simplex net, a mobile or base



CCARES Net Control Dalton Weatherford, KK4KSM (on the left), and Colen Boutwell, WA5RKR (on the right), of CARS at an antenna workday at the CCARES headquarters in Lake City, Florida.

station radio with an RF output of 25 W or greater is preferred. Handheld radios may be used if there's sufficient height above the average terrain and an efficient antenna is employed.

FEMA Independent Study Courses

Duane Mariotti, WB9RER, is the veteran coordinator of the Kaiser Permanente Amateur Radio Network (KPARN), a California-based organization of hams who volunteer their technical expertise to support emergency preparedness. "We require KPARN communicators to pass the Federal Emergency Management Agency (FEMA) Independent Study courses ICS 100, 200, and 700 on the Incident Command System for Initial Response and National Incident Management System, respectively," Mariotti said. "All are taken online and take about 4 hours to complete. ARRL and ARES emergency coordinators should require [these courses] as part of basic EmComm training." Visit <https://training.fema.gov/is> for more information.

All photos provided by the author.

Contest Corral

April 2024

Check for updates and a downloadable PDF version online at www.arrl.org/contest-calendar.

Refer to the contest websites for full rules, scoring information, operating periods or time limits, and log submission information.

Start - Finish Date-Time	Date-Time	Bands	Contest Name	Mode	Exchange	Sponsor's Website
1 1500	1 1729	3.5,7	DARC Easter Contest	CW Ph	RS(T), DOK or serial	www.darc.de
1 1900	1 2300	144	144 MHz Spring Sprint	CW Ph Dig	4-char grid	sites.google.com/site/springvhfupsprints
4 0000	5 0300	7	Walk for the Bacon QRP Contest	CW	Max 13 WPM; RST, SPC, name, mbr or pwr	qrptest.com/pigwalk40
4 1700	4 2000	3.5	SARL 80m QSO Party	Ph	RS, serial, grid locator or QTH	www.sarl.org.za
4 1800	4 2200	28	NRAU 10m Activity Contest	CW Ph Dig	RS(T), 6-char grid	nrau.net/nrau-contests-in-general
6 1000	7 0400	14	PODXS 070 Club PSK 31 Flavors Contest	Dig	SPC, mbr or name	www.podxs070.com
6 1200	7 1200	3.5-28	EA RTTY Contest	Dig	RSQ, province or serial	concursos.ure.es
6 1200	7 1200	1.8-28	RSGB FT4 International Activity Day	FT4	Signal report	www.rsgbcc.org
6 1200	7 2359	No WARC	Georgia State Parks on the Air	CW Ph Dig	RS(T), park nbr or SPC	gaparks.org/forms-rules-register
6 1400	7 0200	1.8-28, 50,144	Louisiana QSO Party	CW Ph Dig	RS(T), LA parish or SPC	laqp.louisianacontestclub.org
6 1400	7 0200	1.8-28, 50,144	Mississippi QSO Party	CW Ph Dig	RS(T), MS parish or SPC	www.arrlmiss.org
6 1400	7 2000	1.8-28, VHF/UHF	Missouri QSO Party	CW Ph Dig	RS(T), MO county or SPC	www.w0ma.org/index.php
6 1400	7 2200	3.5-28	Florida State Parks on the Air	CW Ph Dig	Park nbr or SP	flspot.org/rules
6 1500	7 1500	1.8-28	SP DX Contest	CW Ph	RS(T), SP province or serial	spdxcontest.pzk.org.pl
7 1000	7 2100	3.5-14	WAB 3.5/7/14 MHz Data Modes	Dig	RS, serial, WAB square or country	wab.intermip.net/Contests.php
8 1400	8 2359	1.8-28,50	Solar Eclipse QSO Party	CW Ph Dig	RS(T), 4-char grid	hamsci.org/seqp-rules
8 1900	8 2030	3.5	RSGB 80m Club Championship, CW	CW	RST, serial	www.rsgbcc.org
9 1800	9 1929	3.5,7	DARC RTTY Sprint	Dig	RST, DOK or serial	www.darc.de
13 0000	13 0600	1.8-28	QRP ARCI Spring QSO Party	CW	RS, SPC, mbr or pwr	qrparci.org
13 0700	14 1300	1.8-28	JIDX CW Contest	CW	RST, JS prefecture or CQ zone	www.jidx.org/jidxrule-e.html
13 1200	14 1200	1.8-28	OK/OM DX Contest, SSB	Ph	RS, OK/MO county code or serial	okomdx.crk.cz
13 1200	14 1800	3.5-28	IG-RY World Wide RTTY Contest	Dig	RST, 4-dig yr first licensed	www.ig-ry.de
13 1400	14 0200	1.8-28, 50,144	New Mexico QSO Party	CW Ph Dig	Name, NM county or SPC	www.newmexicoqsoparty.org
13 1500	13 1900	3.5-14	Africa FT4 DX Contest	FT4	Signal report, 4-char grid	www.sarl.org.za
13 1800	14 2359	1.8-28,50	Georgia QSO Party	CW Ph	RST, GA county or SPC	gaqsoparty.com
13 2100	14 2059	1.8-28, sat	Yuri Gagarin International DX Contest	CW Ph	RST, ITU zone	gccontest.ru
16 1900	16 2300	222	222 MHz Spring Sprint	CW Ph Dig	4-char grid	sites.google.com/site/springvhfupsprints
17 1900	17 2030	3.5	RSGB 80m Club Championship, SSB	Ph	RS, serial	www.rsgbcc.org
18 0000	19 0300	14	Walk for the Bacon QRP Contest	CW	Max 13 WPM; RST, SPC, name, mbr or pwr	qrptest.com/pigwalk20
20 0500	20 0859	3.5,7	ES Open HF Championship	CW Ph	RS(T), serial	www.erau.ee
20 0600	21 0559	3.5-28	Worked All Provinces of China DX Contest	Ph	RS(T), BY province or serial	www.mulandxc.com
20 0700	21 0659	3.5-28	YU DX Contest	CW Ph	RS(T), YU/YT county or serial	www.yudx.yu1srs.org.rs
20 0900	21 2359	3.5-28	CQMM DX Contest	CW	RST, continent abbr, mbr code (if any)	www.cqmmdx.com/rules
20 1100	21 0059	1.8-28, VHF/UHF	Nebraska QSO Party	CW Ph Dig	NE county or SPC (FT8: grid)	nebraskaqsoparty.com
20 1400	21 2000	No WARC	Texas State Parks on the Air	CW Ph Dig	RST, park nbr or SPC	www.tspot.org
20 1600	21 0400	3.5-28	Michigan QSO Party	CW Ph	RST, MI county or SPC	miqp.org/index.php/rules
20 1700	21 1200	3.5-28	EA-QRP CW Contest	CW	RST, category, "M" if mbr	www.eaqrp.com
20 1800	21 1800	1.8-28, 50,144	Ontario QSO Party	CW Ph	RS(T), ON county or SPC	www.va3cco.com/oqp/rules.htm
20 1800	21 1800	1.8-28, 50,144	North Dakota QSO Party	CW Ph Dig	RS(T), ND county or SPC	www.ndarrlsection.com
21 0700	21 1900	3.5,7	International Vintage Contest HF	CW Ph	RS(T), 6-char grid	vintagecontest.webnode.it
21 1200	21 2200	1.8-28, 50,144	Quebec QSO Party	CW Ph	RS(T), QC zone or SPC	wp1.quebecqsoparty.org
21 1800	21 2359	3.5-28	ARRL Rookie Roundup, SSB	Ph	Name, 2-dig yr first licensed, state/province/XE area/DX	www.arrl.org/rookie-roundup
21 2300	22 0100	1.8-28	Run for the Bacon QRP Contest	CW	RST, SPC, mbr or pwr	qrptest.com/pigrun
24 1900	24 2300	432	432 MHz Spring Sprint	CW Ph Dig	4-char grid	sites.google.com/site/springvhfupsprints
25 1900	25 2030	3.5	RSGB 80m Club Championship, Data	Dig	RST, serial	www.rsgbcc.org
27 0001	28 2359	28	10-10 Int'l Spring Contest, Digital	Dig	Name, mbr or "0," SPC	www.ten-ten.org
27 1200	28 1200	3.5-28	SP DX RTTY Contest	Dig	RST, SP 2-letter province or serial	www.pkrvg.org
27 1200	28 1200	3.5-28	UK/EI DX Contest, CW	CW	RST, UK/EI district code, serial	www.ukeicc.com
27 1600	28 2159	7,14,21,28	Florida QSO Party	CW Ph	RS(T), FL county or SPC	floridaqsoparty.org
28 1300	28 1859	3.5-28	UA1DZ Memorial Cup	CW Ph	RS(T), RDA district or 4-char grid	ua1dz.ru
28 1700	28 2059	3.5-28	BARTG Sprint 75	Dig	Serial	bartg.org.uk

There are a number of weekly contests not included in the table above. For more info, visit: www.qrpfoxhunt.org, www.nccsprint.com, and www.cwops.org. All dates and times refer to UTC and may be different from calendar dates in North America. Contests are not conducted on the 60-, 30-, 17-, or 12-meter bands. Mbr = Membership number. Serial = Sequential number of the contact. SPC = State, Province, DXCC Entity. XE = Mexican state. Listings in blue indicate contests sponsored by ARRL or NCJ. The latest time to make a valid contest QSO is the minute listed in the "Finish Time" column. Data for Contest Corral is maintained on the WA7BNM Contest Calendar at www.contestcalendar.com and is extracted for publication in QST 2 months prior to the month of the contest. ARRL gratefully acknowledges the support of Bruce Horn, WA7BNM, in providing this service.

2024 Straight Key Night Results

“CW is music to my ears!” — Rich Zott, WA2ELW


Paul Bourque, N1SFE, ARRL Contest Program Manager

Many hams look forward to starting the new year with the sounds of Morse code. 2024 was no exception, as 161 participants reported 1,360 contacts on Straight Key Night (SKN). Stations throughout the United States and Canada submitted entries. There were also DX entries from stations in Guatemala, Panama, and the Netherlands.

Craig Bishop, W2NTN, noted that the event is “a fun and terrific way to start the new year!” Thomas Brede-mus, KC0INP, commented, “Straight Key Night was a nice way to start 2024 on the radio, meeting some new friends and having some longer and interesting QSOs.” Howard Holden, WB2AWQ, said he hasn’t missed SKN since its inception in 1971.

Seasoned operators and those new to CW can enjoy the leisurely pace of SKN. On holiday break from his re-search studies at the US Naval Academy in Annapolis, Maryland, Michael “Mac” Cullen, K6MAC, made his first-ever CW contact with John Magliacane, KD2BD, on 40 meters using a key that was last used by his father, Michael Cullen, K1NPT, in 1972.

For some hams, SKN is more than just a night to get on the air using Morse code; it’s a way to remember relatives and friends. Richard “Woody” Linwood, W0UI, used a 1920s-era Signal Electric Manufacturing Co. key that belonged to his grandfather, who served in World War II. Colin Phoon, AE3A, used a Ten-Tec Omni VI Plus transceiver with a Lionel J-38 straight key that

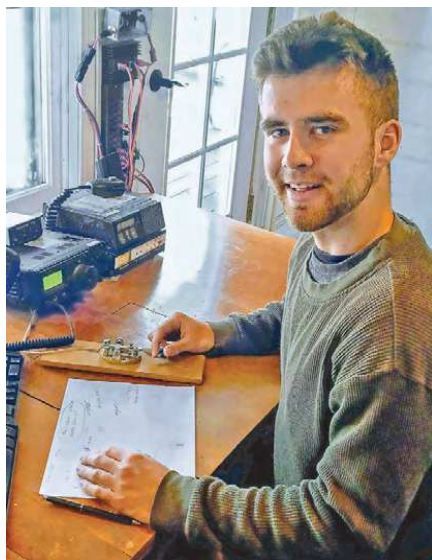

Michael “Mac” Cullen, K6MAC, made his first-ever CW contact during the 2024 Straight Key Night. Licensed since 2011, he recently upgraded to Extra class in 2023. He used a key that was last used by his father, Michael Cullen, K1NPT, in 1972. [Michael Cullen, K1NPT, photo]

belonged to his father-in-law, Barry Cohen, K2JV, who was licensed for more than 75 years.

Best Fist and Most Interesting QSO

SKN participants are asked to vote for “Best Fist” and “Most Interesting QSO.” This year’s vote for “Best Fist” is a five-way tie between Mark Melchiori, N9AK; David Miller, N9SS; Dennis Sokol, W0JX; Robert Sauvan, W0YBS, and Jim Wickstrom, W1IK. For “Most Interesting QSO,” there is a tie between Scott Overholt, KA6IOM, and Ed Moxon, K1GGI, who operated the WHNJ Amateur Radio Association’s club station, W1HJ, from the Marconi-RCA Wireless Museum in Chatham, Massachusetts.

The next ARRL Straight Key Night will be held on January 1, 2025.

Participating Stations

AA1HO, AA4RA, AA4TB, AA8UU, AA0QZ, AB8FJ, AB9BZ, AE3A, AE7AX, AE7CG, AF4MY, AK4KM, AL7JK, K1AJ, K1EEE, K1TW, K2AL, K2RP, K3BVQ, K3LO, K3MD, K3SWZ, K3TW, K4DS, K4FOY, K4TRH, K5EC, K5MBA, K5NZ, K5RIX, K6DF, K6GPB, K6KQV, K6MAC, K6PBQ, K8EG, K9MMS, K9PFA, K9SB, K9YA, K0JW, K0WOI, KA4WJB, KA5HRF, KA7T, KA9FZR, KA0LDG, KB8PGW, KB8TXZ, KB9W, KC2KWA, KC2LM, KC6MIE, KC0INP, KD2BD, KE1R, KE4Q, KE0TT, KF8KS, KF9AQ, KG5IEE, KG7BF, KG7CW, KI4DEF, KI5PED, KK7B, KQ6BZ, KQ9J, KR4EE, KW6G, N1SFE, N2HM, N2KZ, N4FTD, N4HAY, N4QR, N5LB, N6KZ, N6TCZ, N6ZO, N7MM, N7QR, N8GU, N9BOR, N9EVP, N9RU, N9SS, N0QLT, N0ZB, NA5N, NC6Q, NI8W, NN3E, NV5P, NW6V, NZ0T, VA3RKM, VE3CBK, VE3FIT, VE7CA, VE7NI, VO1NA, VY1KX, W1AST, W1FJ, W1PID, W1RO, W1TPB, W1TS, W2NTN, W2WSC, W3GW, W3SOX, W3TIM, W4NNF, W5ESE, W5NZ, W5ZA, W6LX, W6SGJ, W7AIT, W7FOX, W7IY, W7VHW, W8DPK, W8FDV, W8WTS, W8WZ, W0CTX, W0EJO, W0ESE, W0UI, W0YBS, WA1CFX, WA2ELW, WA3WAW, WA9LKZ, WA9PWP, WA9ZBW, WA0JLY, WB2AWQ, WB3JKQ, WB6VRN, WB7AEA, WB7EHX, WB8CFO, WB8DQT, WB8RFB, WB9HFK, WB0B, WB0CJB, WD8RIF, WD4OQH, WI5ARD, WK0X, and WN4OFT.

DX stations included HP1IBF, HP1RIS, PA3AAA, and TG9ADM.

2023 September VHF Contest Results

Check out the results of the event, held September 9 – 11, 2023.

Regional Leaders

LM = Limited Multioperator; R = Classic Rover; RL = Limited Rover; RU = Unlimited Rover; SO-ALG-3B = Single Operator, Analog Only, Three-Band; SO-ALG-HP = Single Operator, Analog Only, High Power; SO-ALG-LP = Single Operator, Analog Only, Low Power; SO3B = Single Operator, Three-Band; SOFM = Single Operator, FM Only; SOHP = Single Operator, High Power; SOLP = Single Operator, Low Power; SOP = Single Operator, Portable; SOP-ALG = Single Operator, Portable, Analog Only; UM = Unlimited Multioperator

West Coast Region (Pacific, Northwestern, and Southwestern Divisions; Alberta, British Columbia, and NT Sections)	Midwest Region (Dakota, Midwest, Rocky Mountain, and West Gulf Divisions; Manitoba and Saskatchewan Sections)	Central Region (Central and Great Lakes Divisions; Ontario East, Ontario North, Ontario South, and Greater Toronto Area Sections)	Southeast Region (Delta, Roanoke, and Southeastern Divisions)	Northeast Region (New England, Hudson, and Atlantic Divisions; Maritime and Quebec Sections)
WA6OEM/R 1,668 R KD6EFQ/R 1,649 R N7DA/R 546 R N6VHF/R 468 R N6GP/R 6,902 RL KA7RRA/R 2,268 RL WE7X/R 1,648 RL NN6U/R 1,406 RL K6LMN/R 1,105 RL N7EPD 8,322 SOHP N6UTC 7,018 SOHP K6KLY 5,600 SOHP N7KSI 3,774 SOHP W7MEM 2,795 SOHP N7IR 6,192 SOLP AL1VE 5,920 SOLP N6ZE 2,337 SOLP N7DB 2,016 SOLP KG7PD 1,368 SOLP K6MI 4,320 SO-ALG-HP KB7IOG 858 SO-ALG-HP VE7AFZ 616 SO-ALG-HP VA7SC 4,060 SO-ALG-LP K2GMY 3,422 SO-ALG-LP VE7HR 1,037 SO-ALG-LP K6MUG 960 SO-ALG-LP KE7UQL 800 SO-ALG-LP WQ6D 230 SOP W7IMC 4,095 SOP-ALG W7JET 1,360 SOP-ALG AA6XA 116 SOP-ALG N7JA 68 SOP-ALG KG7RQJ 36 SOP-ALG WA7PVE 1,309 SO3B KI6X 848 SO3B AA7EA 450 SO3B WA8ZID 372 SO3B WA2KDL 264 SO3B N7QOZ 3,087 SO-ALG-3B K7CX 2,340 SO-ALG-3B KN7Y 884 SO-ALG-3B WB7FJG 550 SO-ALG-3B KG7D 360 SO-ALG-3B K6RJF 1,056 SOFM K1CT 728 SOFM AF6GM 660 SOFM N6DRE 456 SOFM N6MX 261 SOFM WO1S 1,092 LM KC6NKK 551 LM W6SPR 70 LM KN6UWK 5,859 UM	KC0P/R 11,417 R N0HZO/R 9,064 R N5ZY/R 4,182 R AF4JF/R 1,460 R WA0CNS/R 952 R K0LTC/R 1,863 RL AB0YM/R 1,333 RL W5OC/R 986 RL WA5AZQ/R 750 RL N0LD/R 135,888 RU AB0RX/R 99,862 RU K1SVZJ/R 27,712 RU W0AUS (W0ZQ, op) 47,088 SOHP W5PR 30,960 SOHP K5ND 18,232 SOHP K5GZR 16,830 SOHP N5JS 12,702 SOHP WM5L 27,776 SOLP N5EKO 19,448 SOLP WB5TUF 19,240 SOLP AJ4F 10,033 SOLP KM5RG 7,935 SOLP W0GHZ 5,664 SO-ALG-HP WA5LFD 320 SO-ALG-HP KA0PQW 5,376 SO-ALG-LP KA0CRO 1,140 SO-ALG-LP KB0KQI 220 SO-ALG-LP AE0EE 84 SO-ALG-LP AE0G 30 SO-ALG-LP N0JK 703 SOP N0SUW 243 SOP WD5AGO 3,168 SOP-ALG W5TRL 39,182 SO3B KF0LKJ 2,336 SO3B N5UM 1,776 SO3B KC7QY 1,530 SO3B N0AT 1,456 SO3B N0UI 42 SO-ALG-3B KE0OR 2 SO-ALG-3B KG5UNK 392 SOFM K5QE 107,124 LM W0VB 3,640 LM N0EO 2,840 LM WQ0P 25,800 UM KC5MVZ 5,856 UM	VE3OIL/R 97,966 R KA9VVQ/R 34,914 R W9FZ/R 33,728 R K9JK/R 444 R KG9OV/R 28,391 RL W8ISS/R 1,189 RL K9CT 40,320 SOHP VE3WY 20,298 SOHP W9EWZ 16,000 SOHP VA3KE 14,924 SOHP WA8MCD 14,678 SOHP K2DRH 123,384 SOLP K9MU 49,407 SOLP K9KLD 43,043 SOLP KA9UVY 28,860 SOLP W9XT 7,345 SOLP K2YAZ 15,232 SO-ALG-HP N9LB 11,766 SO-ALG-HP K8TQK 3,713 SO-ALG-HP VE3KG 20 SO-ALG-HP VE3DS 24,880 SO-ALG-LP VE3RWJ 1,540 SO-ALG-LP K8BB 1,125 SO-ALG-LP N9GH 54 SO-ALG-LP VE3RVZ 52 SO-ALG-LP KO9A 59,714 SO3B K9PW 13,203 SO3B KA9FOX 9,052 SO3B WB9TFH 6,360 SO3B W9AV 4,032 SO3B N9OBB 285 SO-ALG-3B WO3X 20 SO-ALG-3B VA3PHP 24 SOFM VE3RGO 1 SOFM W9VW 34,638 LM K8AEP 108 LM WD9EXD 75,174 UM N8GA 72,268 UM VE3MIS 47,880 UM N2BJ 25,615 UM	AG4V/R 15,128 R W5VY/R 7,020 R KQ4GEX/R 1,176 R KM4OZH/R 10,976 RL NV4B/R 63,142 RU K4CNY/R 7,257 RU W8BRY/R 4,284 RU W3IP 52,302 SOHP K1HTV 24,012 SOHP K3SK 23,520 SOHP WA4GPM 16,530 SOHP N3MK 16,128 SOHP W4TM 12,560 SOLP AJ6T 10,400 SOLP W2UA 10,224 SOLP KY4G 5,252 SOLP AA4DD 4,264 SOLP WB4WXE 3,666 SO-ALG-HP K4WI 1,312 SO-ALG-HP W4HLR 850 SO-ALG-HP N4RA 480 SO-ALG-HP N1GC 450 SO-ALG-HP W4RAA 5,016 SO-ALG-LP KW4G 448 SO-ALG-LP WA4WZQ 63 SO-ALG-LP AD4IE 6 SO-ALG-LP NJ4Q 1 SO-ALG-LP N2BMN 1 SO-ALG-LP W4RXR 9,570 SOP W2QL 432 SOP N3AWS 4 SOP-ALG KK4MA 20,768 SO3B KO4ECD 13,950 SO3B NS4T 10,349 SO3B KD4ADC 6,600 SO3B K3FR 3,850 SO3B KW4SW 49 SO-ALG-3B KV4ZY 35 SO-ALG-3B K14POT 102 SOFM WX4DAT 78 SOFM KQ4CAX 6 SOFM WB2FKO 6 SOFM KG5FHU 6 SOFM AA4ZZ 184,646 LM W4AD 67,398 LM N9HF 14,792 LM NE5BO 6,138 LM W4NH 49,138 UM	K2QO/R 78,516 R KF2MR/R 73,341 R KV2X/R 14,196 R KE2BUY/R 9,009 R KJ1K/R 2,336 R AA2SD/R 6,680 RL KE5HDE/R 1,809 RL N2SLN/R 17,884 RU N2XRE/R 3,306 RU K1TEO 306,606 SOHP N2JMH 165,066 SOHP N2NT (N2NC, op) 79,846 SOHP K1KG 46,620 SOHP WA3DRC 37,520 SOHP N2WK 83,000 SOLP NR2C 81,736 SOLP WB1GQR (W1SJ, op) 72,720 SOLP KA2ENE 41,934 SOLP N2OA 30,149 SOLP W2FU 94,612 SO-ALG-HP WZ1V 49,450 SO-ALG-HP K1TR 26,896 SO-ALG-HP WA1PBU 14,720 SO-ALG-HP KR1ST 8,750 SO-ALG-HP AF1T 71,853 SO-ALG-LP WB2JAY 19,108 SO-ALG-LP AC1J 5,254 SO-ALG-LP K0SM 3,675 SO-ALG-LP KD2HZI 3,267 SO-ALG-LP WX3P 960 SOP N2MAK 264 SOP K3GD 210 SOP KC3UKC 52 SOP KC2JRG 9 SOP WB2AMU 988 SOP-ALG K2AXX 700 SOP-ALG NU2H 18 SOP-ALG NF3R 11,256 SO3B W3FAY 11,220 SO3B KD2CDV 8,848 SO3B NA2NY 7,686 SO3B W1DYJ 6,897 SO3B K3SFX 1,430 SO-ALG-3B N1ZN 1,232 SO-ALG-3B W1SRH 867 SO-ALG-3B N1JD 680 SO-ALG-3B WA3SRU 559 SO-ALG-3B KB1YNT 306 SOFM W2EA 84,064 LM WW2Y 35,046 LM WA3EKL 22,356 LM W3SO 22,272 LM W1XM 9,776 LM W2SZ 368,896 UM KD2LGX 52,824 UM KV1J 48,688 UM WE1P 48,076 UM KE1LI 20,000 UM

The next September VHF Contest will be held September 14 – 16, 2024.

Top Ten

Classic Rover

VE3OIL/R	97,966
K2QO/R	78,516
KF2MR/R	73,341
KA9VVQ/R	34,914
W9FZ/R	33,728
AG4V/R	15,128
KV2X/R	14,196
KC0P/R	11,417
N0HZO/R	9,064
KE2BUY/R	9,009

Limited Rover

KG9OV/R	28,391
KM4OZH/R	10,976
N6GP/R	6,902
AA2SD/R	6,680
KA7RRA/R	2,268
K0LTC/R	1,863
KE5HDE/R	1,809
WE7X/R	1,648
NN6U/R	1,406
AB0YM/R	1,333

Unlimited Rover

N0LD/R	135,888
AB0RX/R	99,862
NV4B/R	63,142
K15VZJ/R	27,712
N2SLN/R	17,884
K4CNY/R	7,257
W8BRY/R	4,284
N2XRE/R	3,306

Single Operator, High Power

K1TEO	306,606
N2JMH	165,066
N2NT (N2NC, op)	79,846
W3IP	52,302
W0AUS (W0ZQ, op)	47,088
K1KG	46,620
K9CT	40,320
WA3DRC	37,520
W5PR	30,960
K1HTV	24,012

Single Operator, Low Power

K2DRH	123,384
N2WK	83,000
NR2C	81,736
WB1GQR (W1SJ, op)	72,720
K9MU	49,407
K9KLD	43,043
KA2ENE	41,934
N2OA	30,149
KA9UVY	28,860
WM5L	27,776

Single Operator, Analog Only, High Power

W2FU	94,612
WZ1V	49,450
K1TR	26,896
K2YAZ	15,232
WA1PBU	14,720
N9LB	11,766
KR1ST	8,750
W0GHZ	5,664
K6MI	4,320
W1GHZ	3,772

Single Operator, Analog Only, Low Power

AF1T	71,853
VE3DS	24,880
WB2JAY	19,108
KA0PQW	5,376
AC1J	5,254
W4RAA	5,016
VA7SC	4,060
K0SM	3,675
K2GMY	3,422
KD2HZI	3,267

Single Operator, Portable

W4RXXR	9,570
WX3P	960
N0JK	703
W2QL	432
N2MAK	264
N0SUW	243
WQ6D	230
K3GD	210
KC3UKC	52
XE2YWB	35

Single Operator, Portable, Analog Only

W7IMC	4,095
WD5AGO	3,168
W7JET	1,360
WB2AMU	988
K2AXX	700
AA6XA	116
N7JA	68
KG7RQJ	36
NU2H	18
KO6BCW	8

Single Operator, Three-Band

KO9A	59,714
W5TRL	39,182
KK4MA	20,768
KO4ECD	13,950
K9PW	13,203
NF3R	11,256
W3FAY	11,220
NS4T	10,349
KA9FOX	9,052
KD2CDV	8,848

Single Operator, Analog Only, Three-Band

N7QOZ	3,087
K7CX	2,340
K3SFX	1,430
N1ZN	1,232
KN7Y	884
W1SRH	867
N1JD	680
WA3SRU	559
WB7FJG	550
KG7D	360

Single Operator, FM Only

K6RJF	1,056
K1CT	728
AF6GM	660
N6DRE	456
KG5UNK	392
KB1YNT	306
N6MX	261
W6JBR	119
K14POT	102
WX4DAT	78

Limited Multioperator

AA4ZZ	184,646
K5QE	107,124
W2EA	84,064
W4AD	67,398
WW2Y	35,046
W9VW	34,638
WA3EKL	22,356
W3SO	22,272
N9HF	14,792
W1XM	9,776

Unlimited Multioperator

W2SZ	368,896
WD9EXD	75,174
N8GA	72,268
KD2LGX	52,824
W4NH	49,138
KV1J	48,688
WE1P	48,076
VE3MIS	47,880
WQ0P	25,800
N2BJ	25,615

Division Winners

Classic Rover

Atlantic	K2QO/R	78,516
Central	KA9VVQ/R	34,914
Dakota	KC0P/R	11,417
Delta	AG4V/R	15,128
Hudson	KD2TAI/R	1,560
Midwest	N5ZY/R	4,182
New England	KJ1K/R	2,336
Northwestern	WA6OEM/R	1,668
Roanoke	KQ4GEX/R	1,176
Southwestern	KD6EFQ/R	1,649
Canada	VE3OIL/R	97,966

Limited Rover

Atlantic	AA2SD/R	6,680
Central	KG9OV/R	28,391
Dakota	K0LTC/R	1,863
Great Lakes	W8ISS/R	1,189
Northwestern	KA7RRA/R	2,268
Pacific	NN6U/R	1,406
Roanoke	KM4OZH/R	10,976
Rocky Mountain	AB0YM/R	1,333
Southwestern	N6GP/R	6,902
West Gulf	W5OC/R	986
Canada	VA7USD/R	340

Unlimited Rover

Atlantic	N2SLN/R	17,884
Midwest	N0LD/R	135,888
Roanoke	WB8RY/R	4,284
Southeastern	NV4B/R	63,142

Single Operator, High Power

Atlantic	N2JMH	165,066
Central	K9CT	40,320
Dakota	W0AUS (W0ZQ, op)	47,088
Delta	W5ZN	5,504
Great Lakes	WA8MCD	14,678
Hudson	N2NT (N2NC, op)	79,846
Midwest	KF0M	6,141
New England	K1TEO	306,606
Northwestern	N7EPD	8,322
Pacific	K6KLY	5,600
Roanoke	W3IP	52,302
Rocky Mountain	KB0NAV	4,180
Southeastern	WA4GPM	16,530
Southwestern	N6UTC	7,018
West Gulf	W5PR	30,960
Canada	VE3WY	20,298

Single Operator, Low Power

Atlantic	N2WK	83,000
Central	K2DRH	123,384
Dakota	K0JJR	1,972
Delta	AJ6T	10,400
Great Lakes	AA8MA	4,416
Hudson	WA2VNV	12,696
Midwest	N0LL	6,097
New England	WB1GQR (W1SJ, op)	72,720
Northwestern	AL1VE	5,920
Pacific	N6ORB	972
Roanoke	K4FJW	3,465
Rocky Mountain	KD5XB	2,904
Southeastern	W4TM	12,560
Southwestern	N7IR	6,192
West Gulf	WM5L	27,776
Canada	VA2IW	8,850

Single Operator, Analog Only, High Power

Atlantic	W2FU	94,612
Central	N9LB	11,766
Dakota	W0GHZ	5,664
Delta	W4HLR	850
Great Lakes	K2YAZ	15,232
Hudson	K2XA	364
New England	WZ1V	49,450
Northwestern	KB7IOG	858
Pacific	K6MI	4,320
Roanoke	N4RA	480
Southeastern	WB4WXE	3,666
West Gulf	WA5LFD	320
Canada	VE7AFZ	616

Single Operator, Analog Only, Low Power

Atlantic	K0SM	3,675
Central	N9GH	54
Dakota	KA0PQW	5,376
Great Lakes	K8BB	1,125
Hudson	WB2JAY	19,108
Midwest	AE0G	30
New England	AF1T	71,853
Northwestern	N7VGO	336
Pacific	K2GMY	3,422
Roanoke	WA4WZQ	63
Rocky Mountain	KB0KQI	220
Southeastern	W4RAA	5,016
Southwestern	K6MUG	960
Canada	VE3DS	24,880

Single Operator, Portable

Atlantic	N2MAK	264
Dakota	N0SUW	243
Delta	W4RXXR	9,570
Hudson	WX3P	960
Midwest	N0JK	703
Roanoke	W2QL	432
Southwestern	WQ6D	230

Single Operator, Portable, Analog Only

Atlantic	K2AXX	700
Delta	N3AWS	4
Hudson	WB2AMU	988
Northwestern	W7IMC	4,095
Pacific	AA6XA	116
Southwestern	W7JET	1,360
West Gulf	WD5AGO	3,168

Single Operator, Three-Band

Atlantic	NF3R	11,256
Central	KO9A	59,714
Dakota	KF0LKJ	2,336
Delta	WD5HJF	1,287
Great Lakes	KA8CNI	3,600
Hudson	NA2NY	7,686
Midwest	W0DTM	416
New England	W1DYJ	6,897
Northwestern	WA7PVE	1,309
Pacific	N5KO	189
Roanoke	KK4MA	20,768
Rocky Mountain	KC7QY	1,530
Southeastern	NS4T	10,349
Southwestern	KI6X	848
West Gulf	W5TRL	39,182
Canada	VA2CY	1,848

Single Operator, Analog Only, Three-Band

Atlantic	K3SFX	1,430
Central	N9OBB	285
Dakota	KE0OR	2
Great Lakes	W03X	20
Hudson	WV2C	112
Midwest	N0UI	42
New England	N1ZN	1,232
Northwestern	N7QOZ	3,087
Pacific	KG7D	360
Roanoke	KV4ZY	35
Southeastern	KW4SW	49
Southwestern	KN7Y	884

Single Operator, FM Only

Delta	KE5WMA	2
New England	KB1YNT	306
Roanoke	KI4POT	102
Southeastern	KG5FHU	6
Southwestern	WB2FKO	6
Southwestern	K6RJF	1,056
West Gulf	KG5UNK	392
Canada	VA3PHP	24

Limited Multioperator

Atlantic	W2EA	84,064
Central	W9VW	34,638
Dakota	N0EO	2,840
Delta	NE5BO	6,138
Great Lakes	K8AEP	108
New England	W1XM	9,776
Roanoke	AA4ZZ	184,646
Rocky Mountain	W0VB	3,640
Southeastern	N9HF	14,792
Southwestern	W01S	1,092
West Gulf	K5QE	107,124

Unlimited Multioperator

Atlantic	KD2LGX	52,824
Central	WD9EXD	75,174
Great Lakes	N8GA	72,268
Hudson	WE1P	48,076
Midwest	WQ0P	25,800
New England	W2SZ	368,896
Southeastern	W4NH	49,138
Southwestern	KN6UWK	5,859
West Gulf	KC5MVZ	5,856
Canada	VE3MIS	47,880

Full Results Online

You can read the full results of the contest online at <http://contests.arrl.org>. You'll find detailed analysis and more play-by-play, along with the full line scores. Improve your results by studying your log-checking report, too.

Volunteers On the Air Year in Review



Bart Jahnke, W9JJ, ARRL Radiosport Manager

While the 2023 ARRL Year of the Volunteers celebration and Volunteers On the Air (VOTA) operating activity have concluded, like similar year-long events that have recently come before — such as the 2014 ARRL Centennial, 2016 National Parks on the Air, and 2018 International Grid Chase — the events remain fresh in our minds. They offered fond memories of experiences enjoyed with new and old friends, and meeting and contacting volunteers and prospective volunteers on our many amateur radio bands during the year.

VOTA 2023 provided abundant on-the-air contact opportunities for everyone. There were more than 134 million Logbook of The World (LoTW) contacts uploaded during the year. Of these, more than 835,000 unique call signs from separate participants that were evaluated for scoring were uploaded. LoTW took in more than 72,000 log-file uploads to amass these totals. Talk about awesome numbers!

During 2023, our VOTA activation calendar (<https://contests.arrl.org/docs/2023-VOTA-State-Activations-Schedule.pdf>) reported W1AW portable stations were activated in all 50 states, as well as in Washington, DC,

Top 25 USA					
US Rank	Call Sign	Overall Rank	State Rank	QSOs	Points
1	K1RH	1	1 (MD)	24,622	194,096
2	N6PE	7	1 (CA)	19,963	149,376
3	N8HRZ	9	1 (OH)	19,338	147,252
4	W6MSU	10	2 (CA)	29,049	143,016
5	NF3R	11	1 (PA)	23,402	138,270
6	KC5TT	12	1 (TX)	17,027	136,973
7	AC0W	13	1 (MN)	15,579	135,014
8	K8JH	15	1 (MI)	7,247	133,216
9	K7BG	16	1 (SD)	13,619	132,654
10	AI0Y	18	1 (ND)	13,742	129,853
11	K8BL	19	2 (OH)	21,351	129,028
12	WD9HSY	20	1 (IL)	14,649	121,411
13	W8FSM	21	2 (MI)	17,298	120,324
14	N5EKO	25	2 (TX)	10,224	99,283
15	AD7J	27	1 (NV)	6,611	97,254
16	KX8X	29	3 (MI)	15,617	95,469
17	AB8MO	32	3 (OH)	11,877	93,999
18	N8CWU	33	4 (OH)	11,811	93,790
19	AA3B	34	2 (PA)	14,495	92,095
20	W7MY	35	1 (WA)	17,771	92,044
21	N0POH	36	1 (CO)	11,627	91,704
22	N5RZ	38	3 (TX)	12,954	90,064
23	N7UVH	39	1 (ID)	15,597	90,037
24	KV0I	43	1 (NE)	14,345	88,850
25	N4ZZ	44	1 (TN)	14,665	88,632



During the 2023 ARRL 10-Meter Contest held on December 9 – 10, 2023, ARRL staff put in an extra checklog effort for the event at the Hiram Percy Maxim Memorial Station, W1AW, giving out CW and Phone VOTA contacts with a focus on working Technician-class licensees. Pictured are ARRL CEO David Minster, NA2AA (front); ARRL Development Associate Mimi Guerrat, KC1TJW (center), and ARRL Radiosport Manager Bart Jahnke, W9JJ (rear). [Sierra Harrop, W5DX, photo]

Top 25 DX			
Overall Rank	Call Sign	QSOs	Points
1	PJ2T	28,477	183,776
2	ZF1A	23,542	154,180
3	TN8K	23,178	133,481
4	8P5A	20,384	130,756
5	CN3A	17,409	109,757
6	CR6K	16,528	107,178
7	CY0S	17,366	104,751
8	PJ4K	15,510	98,483
9	E7DX	13,968	96,948
10	OM2VL	14,164	94,420
11	ZF5T	12,528	90,473
12	VA6RCN	12,273	89,987
13	ED1R	13,235	89,446
14	US2YW	15,612	87,077
15	5W1SA	18,191	86,606
16	LN8W	12,203	85,393
17	CT1ILT	12,567	83,397
18	3B7M	15,178	81,721
19	E51D	13,001	81,518
20	TM7A	11,750	80,979
21	TI7W	11,745	80,514
22	II2S	11,542	79,721
23	P40L	12,190	79,424
24	V31DL	17,353	78,732
25	F6AGM	11,662	78,276

Participants by Point Value Category		
Volunteer or Staff Position	Points per Contact	Number of Activators
ARRL President	300	1
Past President/President Emeritus	275	3
Vice President/Honorary Vice President	250	10
Director/Director Emeritus/Past Vice President	225	23
Vice Director	200	13
Section Manager	175	71
Staff Officer/Treasurer/Counsel/Past Director	150	27
Past Vice Director	125	28
ARRL Headquarters Station W1AW/Past Section Manager/Charter Life Member	100	146
ARRL Headquarters Department Manager	75	12
ARRL Headquarters Staff Member/ ARRL Headquarters Volunteer/Maxim Society Member	50	237
CAC/DXAC/ECAC Advisory Committee Member/Assistant Director	40	178
Direction Finding Coordinator/Assistant Section Manager/Electromagnetic Compatibility Committee/LoTW Committee/Public Relations Committee/RF Safety Committee/Youth Committee	35	185
Affiliated Club Coordinator/District Emergency Coordinator/NCJ Editor/ Public Information Coordinator/QST Columnist/State Government Liaison/ Section Traffic Manager/Section Youth Coordinator/Technical Coordinator	30	618
Diamond Club Member/W1INF-W1HQ ARRL Lab Museum Operation/District Emergency Coordinator	25	822
Contest Content Manager/Log Checker/Incoming QSL Bureau Manager	20	18
Volunteer Counsel/Volunteer Consulting Engineer	15	126
Area Digital Coordinator/Assistant District Emergency Coordinator/Area Net Manager/Assistant Section Emergency Coordinator/Assistant Section Traffic Manager/Bulletin Manager/ Emergency Coordinator/Local Government Liaison/Official Bulletin Station/ Official Emergency Station/Official Relay Station/Public Information Officer/ Region Net Manager/Transcontinental Corps Director/Technical Specialist	12	2,306
Technical Advisor	10	19
W1AW portable around the USA (work each state twice)/Awards Manager/ Card Checker/Registered Instructor/ Volunteer Examiner	5	15,844
Incoming QSL Bureau Sorter	3	119
ARRL Life Member	2	6,388
ARRL Member	1	51,528



ARRL Northwestern Division Director Mike Ritz, W7VO, had his station ready for VOTA 2023. His station and team were fired up to operate the ARRL International DX Phone Contest on March 4 – 5, 2023. Mike exclaimed, “Time to start getting radio Scap-poose, Oregon ready for ARRL DX Phone this weekend. We’ll be running MSHP signing W7VO, and we will also be running a second station devoted to ARRL Volunteers on the Air (VOTA), also as W7VO. We’re worth 225 points, so come get us!” [Mike Ritz, W7VO, photo]

Puerto Rico, and American Samoa. Each state was activated twice, which resulted in more than 426,000 contacts by all W1AW portable stations. Thank you to all the coordinators and operators who manned these week-long activations.

Leaderboard and Certificates

As the year and event proceeded, we added a point value lookup page that was updated regularly to view how participants’ scores were accumulating (<https://vota.arrl.org/callPoints.php>). Next, we introduced online participation certificates for all ARRL members who participated. If you haven’t received one yet, enter your call sign at <https://vota.arrl.org/certificates.php> to display a certificate that includes your numbers for overall rank, total score, total QSOs, US or DX rank, and state rank (for US participants) for printing. Log in using your LoTW credentials at <https://vota.arrl.org/my-info.php> for more details. Later we added a Worked All W1AW Portable States certificate for those who contacted all 50 states.

See the VOTA home page at <https://vota.arrl.org/index.php> for the top participant results and additional statistics. Thank you to everyone who participated in the 2023 year-long event, and a special thank you to all who volunteer on ARRL’s behalf!

Club Station

Solutions for Rejuvenating Your Club's Library

The Tamiami Amateur Radio Club (TARC), W4AC, in Nokomis, Florida, knew they needed to update their club's library, but TARC Board of Director (BOD) member Brian M. Jacobson, W1JBD, had something bigger in mind. In this month's column, W1JBD explains how TARC's library grew to include the resources of the entire county's library system.

In 2022, TARC President Paul Nienaber, KN4BAR, was mulling over some project ideas for the club. He asked me which one I would like to take on, and I chose the task of updating the old library.

Prior to my joining TARC, it had a small internal library that consisted of books to help you study for your radio license, a few handbooks for communications, an assortment of project books, and a couple of books about electronics theory. Members could borrow the books from the club library for a defined amount of time, then return them for others to use.

A Community Partnership

Paul and I discussed our ongoing relationship with the William H. Jervy, Jr. Venice Public Library, where we held ARRL Volunteer Examiner (VE) sessions on the second Saturday of every month. I met with the library's manager, Katie Dow, and a new collaboration between TARC and the Sarasota County Library System (SCLS) — an organization of 10 local libraries within Sarasota County — was born.

The SCLS has an extensive online system that allows people to search for books on the internet. If the book isn't at the library closest to the customer, it can be ordered from another branch for pickup at the local library.

Several club members told me that they've visited libraries in Sarasota County to look for project information and books on upgrading their license, or even just to sit in a comfortable chair and read a library copy of *QST*. This told me that in addition to the library system and Sarasota County residents, our own club members would benefit from the library collaboration as well.

Program Funding

I presented a proposal to the club's BOD that involved purchasing 43 books on various ham radio subjects, such



At TARC's inaugural Ham Radio Day at the Library event, Bob Schneider, W5GJ; Jeff Staple, KO4AEA, and two library patrons spoke with visitors about ham radio and the new resources available through the SCLS. [Dwight Sullivan, KT4DDS, photo]

as exam study materials, projects, and antenna systems, as well as various editions of *The ARRL Operating Manual for Radio Amateurs* and the 100th edition of *The ARRL Handbook for Radio Communications* (read the sidebar "Donate the ARRL Library Book Set" for more information about donating books). I proposed that these books be donated to the SCLS for distribution to the 10 libraries within the system, not just the library that was local to the club, and that we update any expiring books (such as exam practice books) each year.

Prior to the BOD meeting, I learned of the ARRL Foundation Club Grant Program for ARRL Affiliated Clubs (www.arrl.org/club-grant-program), and that the current submission deadline was 3 weeks away. The Board approved the proposal at the meeting, and I was able to submit the grant application on time — it was approved!

While I waited for ARRL's response to our grant application, I spoke with other BOD members about what a public fundraising operation would encompass. Sarasota County and the surrounding areas are home to many retired hams and other technology specialists who have a peripheral interest in helping our hobby stay alive. For example, club member Tony DiCenzo, KX1G, offered to donate a second copy of the 100th edition of *The ARRL Handbook*, which

Donate the ARRL Library Book Set

ARRL Affiliated Clubs and members who wish to gift or donate books to a local library, school, or classroom can do so with ease via ARRL's Library Book Set. For a special price of \$250, the set includes the most popular ARRL publications, such as ARRL license manuals, *The ARRL Handbook*, and *The ARRL Antenna Book for Radio Communications*, among others. These publications and resources will encourage potential new amateur radio operators from among students, youth, and the wider community, while also providing support to current licensees who are library users. A complete description of the program, including the books and details for ordering, is available at www.arrl.org/Library-Book-Set.



The Jackson Amateur Radio Club (JARC) donated two complete sets of ARRL books and posters to the Madison County Library System (MCLS) in Canton, Mississippi. JARC President Jim Armstrong, AK5J (far left), and ARRL Delta Division Assistant Director Frank Howell, K4FMH (far right), are shown presenting the books with MCLS staff. [Frank Howell, K4FMH, photo]

raised the total to 44 books. We're beyond grateful for this kind of generosity and kindness that provides others in the community with information they might not be able to locate otherwise.

Additionally, the profits made from selling donated ham radio equipment at hamfests could generate enough money for this type of project. TARC produces \$1,000 to \$3,000 each year from this activity — in 2023, we raised more than \$10,000!

Everyone Benefits

As part of TARC's library program, we wanted to host an event commemorating our book donations and our con-

tinuing promise of service to the library and the community as a whole. On October 14, 2023, we hosted the inaugural Ham Radio Day at the Library event. TARC Information Officer Dwight Sullivan, KT4DDS, put together a program to inform Sarasota County residents of the event, and we had two fully equipped stations in tents operating as special event station N4V to demonstrate ham radio to the public and let them know of the new resources available at the library. We had a successful turnout, and we look forward to hosting this event annually!

We've learned that the amount of ham radio information that's available to the public is indicative of the number of people who contact us to earn their license or to upgrade, or who wish to reach out and support the community they live in. The community benefits because the library system has a new stock of current books available to anyone who has an interest in ham radio, and the club benefits from community members contacting them for more information, looking to take exams with our VE team, and potentially becoming club members.

Write for "Club Station"

QST's "Club Station" column is a designated space for clubs to share specific and practical ideas about what has contributed to their success, in the hope that the information will help other clubs grow and thrive. Visit www.arrl.org/qst-club-station-guidelines-and-profile-form for more information, including author guidelines and a Club Profile Form (this form is required in order for "Club Station" submissions to be considered complete).

ARRL Special Service Clubs

ARRL offers the Special Service Club (SSC) program for clubs that demonstrate that they're working to improve the amateur radio community by completing special projects, holding license classes, and working with local groups on events, among other activities. Visit www.arrl.org/ssc-application for more information about this program. Below is a list of new and renewing SSCs as of January 29, 2024.

New SSCs

Western Carolina ARS — Murphy
Chapter, WC4NC
Valley Radio Club of Oregon, W7PXL

Murphy, NC
Eugene, OR

Renewing SSCs

Kanawha ARC, W8GK
Medina 2 Meter Group, W8EOC
Columbia ARC, W4CAE
Smoky Mountain ARC, W4OLB
York County ARS, K4YTZ
Sumter ARA, W4GL
Sandusky Valley ARC, W8NCK
Meriden ARC, W1NRG
Montgomery ARC, W4AP
Cape Ann ARA, W1GLO
Acadiana ARA, W5DDL

Charleston, WV
Brunswick, OH
Columbia, SC
Maryville, TN
Rock Hill, SC
Sumter, SC
Fremont, OH
Wallingford, CT
Montgomery, AL
Gloucester, MA
Lafayette, LA



Ham Media Playlist

TheSmokinApe — A Ham of Mystery

YouTubers often personalize their channels in some way. Some have little sayings they toss out from time to time; others are known for the amount of coffee they consume. In the case of TheSmokinApe, he never says who he is. Sure, Ape is real, and he is, in fact, a licensed amateur radio operator. But beyond that, most of his viewers don't know who he is, where he hails from, or his call sign.

I first met Ape several years ago when I was teaching amateur radio in school and attempting to fund it through my relatively small YouTube channel. Ape's channel (www.youtube.com/@TheSmokinApe) was significantly larger than mine and, as such, had a much larger reach. Like other HamTubers, Ape saw what I was trying to do for kids and stepped up to help. We began hosting a weekly show on YouTube talking about ham radio, getting kids on the air, and projects we were working on. It involved significant work on Ape's part, and he was happy to do it. Ape has been a stalwart supporter of getting kids engaged in amateur radio for as long as I have known him.

Swinging Over to Amateur Radio

Let's start with the proverbial elephant in the room. Why is his channel called "TheSmokinApe," and why does he go by "Ape"? His name harkens back to his younger days when he and his friends had silly nicknames for each other. Ape's nickname, as you might have guessed, was "Ape." When creating his YouTube channel, Ape combined his nickname with his other loves (cigars and smoking meats). Thus, TheSmokinApe was born. Ape created his YouTube channel before becoming a ham and, at the time, focused on various hobbies and projects he was working on. As his interest in radio grew, his channel slowly transitioned to being mostly radio-related.

Ape was introduced to radio in high school. In the 1980s, he and his friends wanted a way to communicate with each other, so they purchased CB radios and installed them in their vehicles. Over time, Ape's interest in CB radio waxed and waned, but he always found enjoyment in some sort of radio. He tinkered with scanners to monitor public service traffic, SDRs, and more.

Ape wanted to learn more about self-sufficient, grid-independent communications, and discovered amateur radio. He and several friends purchased the *ARRL Ham Radio License Manual* and some handheld radios. Once licensed, he learned how to program them and became known as the technical guy.

Ape didn't have an in-person mentor. Instead, he learned from a combination of ARRL publications and a group of YouTubers such as Randy Hall, K7AGE; Dave Casler, KEØOG, and Stan Gibilisco, W1GV (SK).

Digging into the Technical Aspects of Ham Radio

Ape regularly found himself frustrated that topics he wanted to learn more about were often the most difficult to find good information on. As he dug deeper into some of those topics, he slowly figured out that many hams were in a similar situation. Ape recalls having bought a radio and looking for videos about the more technical aspects of the radio. Instead, he found many unboxing videos and even some that talked briefly about the features, but nothing about functionality or testing of the radio. As a result, Ape started filming when tinkering with new gear, and posting the results to YouTube.

Hams often have very specific questions about how to program a radio. Sometimes, they ask about how to change modes; other times they want to know how to program the buttons to do different things. In Ape's



Ape walks viewers through the process of custom programming the microphone buttons on the Yaesu FTM-500D.

video titled “Yaesu FTM-500D – Programmable Buttons” (<http://tinyurl.com/ape-ftm500d>), Ape shows how to access the menu on the radio. He then discusses what some of the various buttons are preprogrammed to do. He also steps through custom programming options on the radio. The main focus of the video is the face of the radio itself.

Ape also participates in a YouTube show called “Coffee and Ham Radios” with Chuck Thompson, KK6USY; Steve McGrane, KM9G, and Jim Perry, WT1W (www.youtube.com/@CoffeeandHamRadios). This show airs multiple times a week and ranges in topics from technical aspects of the hobby to interviewing other hams. It is generally formatted like a talk show. Many viewers enjoy this format because Ape and the other hosts usually interact with viewers throughout the show. “Coffee and Ham Radios” has supported getting youth on the air through donating gear to classrooms as well as helping to raise funds for the ARRL Teachers Institute.


Chokes, Antennas, and More

Ape loves to get technical but isn’t without a sense of humor. He is infamous for some of his intentional mispronunciations, but it doesn’t diminish the quality of his instruction. A commonly misunderstood piece of equipment in amateur radio is a balun choke. Many hams use them, but not nearly as many understand how they actually work. In Ape’s video “Balun Chokes – How do they work?” (<http://tinyurl.com/Ape-Choke>), Ape takes the time to explain what a toroid is and how it works, and shows some testing using relatively inexpensive equipment available to hams.

As we all know, hams love antennas, and Ape’s viewers are no different. His most popular videos usually



TheSmokinApe explains what toroids are and how they work.

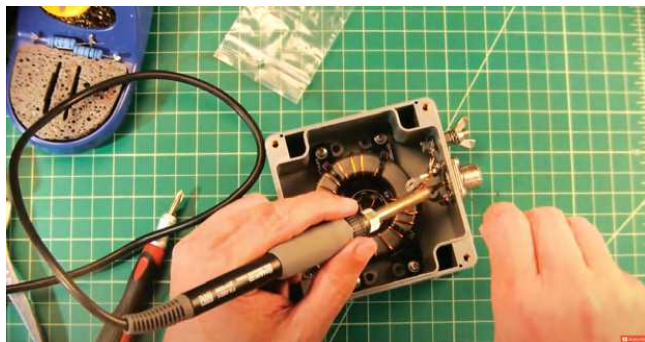

Ape steps viewers through the build process of the ARRL End-Fed Half-Wave Antenna Kit.

involve antenna design or antenna building. In fact, his video on the ARRL End-Fed Half-Wave Antenna Kit, titled “ARRL End Fed Antenna Build – Ham Radio” (<http://tinyurl.com/ape-efhw>), is the most viewed YouTube video on this antenna build. If you want to go along with Ape on this build, you can pick up a kit at <http://tinyurl.com/ARRL-EFHW>. Ape begins by showing the instructions, then quickly moves on to unboxing and explaining the various components in the package. He then shows the process of drilling the box, winding the toroid, and mounting it. One of the nicest things about Ape’s video is that he explains every little step, even those often missed by other videos, such as removing the enamel from magnet wire, testing for continuity before mounting in the box, etc.

Having known Ape for many years, I do know his call sign. He is a great guy who goes out of his way to help others grow in amateur radio. He has been known to be spotted at some of the larger hamfests, such as Orlando Hamcation and Dayton Hamvention, so if you’re lucky, you may be able to spot him in the wild. Whatever your questions are about amateur radio, Ape is likely to have a video answering it, so head over to his YouTube channel and check it out.

Feedback

In “The Un-Ugly Balun Form” by John Portune, W6NBC, and Jim Bailey, W6OEK, in the February 2024 issue, it was incorrectly stated that an ugly balun can be used to cover several higher frequency bands than the one for which it was designed. Due to self-resonance of the balun windings, the frequency range is limited to one or two higher frequency bands at most. Additionally, 3D-printer files that will assist with the build are now accessible on QST in Depth (www.arrl.org/qst-in-depth).

How's DX?

A5 — Bhutan

Bhutan, a primarily Buddhist kingdom in the Himalayas, was on the original 1947 postwar DXCC list. The first on-air activity from Bhutan was by Chhawna, AC5PN, in 1955.

Seven years later, members of the Amateur Radio Society of India activated VU2US/AC5 in April 1962. The operators were in the Indian Army and set up near the Bhutan/Indian border. The team included Lt. General K. Umrao Singh, VU2US; Brigadier Ram Z. Kabraji, VU2BK; Colonel P. S. Gill, VU2PS, and Captain T. A. "Ram" Ramakrishan, VU2TN. Famous DXpeditioner Gus Browning, W4BPD, was there in 1963. Thanks to Chhawna, he was able to get the call signs AC5A and AC7A.

In 1965, Gus was back in Bhutan, operating from multiple locations as AC0H (Chukha Dzong), AC1H (Zhongar Dzong), AC2H (Wangdue Phodrang), AC5H (Tashichho Dzong), AC6H (Dukey Dzong), AC7H (Phuentsholing), AC8H (Chamaphu Dzong), and AC9H (Dechen-Choling).

Bhutan switched to the A5 prefix in the early 1970s, as the US was assigned the AA – AL prefixes at that time. In 1972, Venkat, VU2KV, conducted a DXpedition to Thimphu as A51KV. In the 1970s and 1980s, Pradhan, A51PN (not to be confused with AC5PN), operated from Bhutan's capital.

Bhutan was still rare by the 1990s. Thanks to the persistence of Jim Smith, VK9NS (SK), A51JS was on the air from the kingdom in spring 1990. While there, he met up with Yonten, AC5TY, and Pradhan. In February 1995, Zorro Miyazawa, JH1AJT (SK); Mitty Yokota, JE1OMO; Jin Fujiwara, JF1IST, and Victor, JR6GV (SK), were active as A51/JH1AJT.

By the turn of the next century, Bhutan was on the air much more frequently. May 2000 started off with the 10-day A52A DXpedition by an international team of 15. They made a total of 82,087 contacts; 25,039 of them were unique call signs. The A52A team included James Brooks, 9V1YC; Yuji Yoshitani, JA3IG; Mac Shimamoto, JA3USA; Jin Fujiwara, JF1IST; Al Hernandez, K3VN; Bob Allphin, K4UEE (SK); Mark Johnson, N0MJ; Don Greenbaum, N1DG; Jari Jussila, OH2BU; Mark Demeuleneere, ON4WW; Harry Buklan, RA3AUU; Andy Chesnokov, UA3AB; Glenn Johnson, W0GJ; Wes Lamboley, W3WL, and Vince Thompson, K5VT (SK). Jim Smith was there again in May 2000, but he operated as A52JS. In July of the same year, Sam, JA6NL, was active in Bhutan as A52NL, and a French DX team later operated there as



A map of Bhutan, which currently ranks number 69 on Club Log's DXCC Most Wanted List.

A52FH. Hirotaro Tsukahara, JA1PCY (SK), subsequently put A52XX on the air, and Charly, K4VUD/HS0ZCW, concluded 2020 with an operation as A52UD.

The next year, Dimitri, UA9CO, was active as A52CO; Dave Anderson, K4SV, was A52DA, and Ken Nollet, K0EN, was A52ED. Melissa Holcomb, N0MAJ/K1MJ (A52YL); Glenn Johnson, W0GJ (A52GJ); Vivien Johnson, KL7YL (A52VJ); Mark Johnson, N0MJ (A52MJ), and Paul Johnson, W0PJ (A52PJ), were active in Bhutan as well.

Finishing the first decade in the new millennium were A52CDX and A5100A (both by the Clipperton DX Club), as well as A52SY (by Harvey Vanhauwaert, ON5SY).

Zorro returned to Bhutan with friends in 2012, 2016, 2017, 2018, and 2019 to operate as A5A, A5B, and A50BOC. During his 2018 and 2019 trips, he met with Prince Dasho Jigyel Ugyen Wangchuck. Other operations during this decade include A51IVU (2014), A52JR (2014), A52BH (2018), A52UR (2019), and A52UB (2019).

This decade, there have been two activations: A52CC in 2021 and A52AA in 2023. Despite all of these operations, Bhutan currently ranks number 69 worldwide on Club Log's DXCC Most Wanted List. It is number 30 throughout North America and number 23 in the western half of North America, specifically.

Upcoming Bhutan DXpedition

In early January 2024, Polish DXpeditioners Janusz Wegrzyn, SP9FIH, and Les Przybylak, SP6CIK, an-

nounced their plans for a 2024 DXpedition to Bhutan. They will be operating from April 19 to May 4 using the call signs A52P and A52CI, respectively. Finding a location with good short-path openings to North America, Europe, and Japan has not been easy for the duo because of Bhutan's mountains and deep valleys. Also at play is the "high level of electromagnetic interference in the valleys," according to Janusz. They chose to set up at the Dochula Eco Retreat and will be operating at "3,070 meters above sea level." This location should be great for hams in North America, Europe, and Japan via short path, but not so great via long path to North America, as that path crosses a mountain range near the team's hotel. This will be an excellent chance for those who need to work Bhutan for an all-time new one; Janusz likes to pick a band and stay on it for a week or so to maximize unique contacts. For more information about this DXpedition, visit www.a5.dxpedititions.org.

DX News from Around the World

ZC4 — UK Sovereign Bases on Cyprus

It's been more than 30 years since Adrian, G0KOM, was last active as ZC4MK from the UK Sovereign Bases on the island of Cyprus. He recently had his license renewed, and it will be valid through March 2025. This year, Adrian is planning to be there from March 26 to April 2, which will coincide with the single sideband (SSB) portion of the CQ World Wide (CQ WW) WPX Contest. He said his "equipment will be simple" with an Icom IC-706MKIIG or IC-7000, a DX Commander Expedition vertical, and a hexbeam. Adrian's operating location will be Melanda Beach, Avdimou. He hopes to go again this summer for 6-meter E-skip season. He'll be leaving equipment behind for future visits — he also plans to acquire a five-element Yagi for 50 MHz. Contacts will be uploaded to Club Log, and he will use OQRS. Once he's back home, contacts will be uploaded to Logbook of The World. Adrian is planning next year's 10-day operation in the Sovereign Bases for March, which will again align with the SSB portion of the CQ WW WPX Contest.



J8 — St. Vincent and the Grenadines

Kevin Thomas, W1DED, is going back to Bequia for his third J8NKL operation. He'll be there from March 23 to April 1, which is at the same time as the CQ WW WPX Contest. Check out Kevin's YouTube channel, W1DED WW Ham Radio.

FO/A — The Austral Islands

Haru Uchida, JA1XGI, is planning to be active from Raivavae as TX5XG from March 27 to April 3. He has a web page at <https://australvacation.amebaownd.com>.

Change of Plans

In the March 2024 "How's DX?" column, an announcement was made about veteran DXpeditioner Hrane Milosovic, YT1AD, and his crew heading to the Pacific, with the focus on a DXpedition to Tokelau between February 7 and March 1. In the time since that issue went to press, Hrane announced a change of plans. They have to postpone the DXpedition until later this year or early next year. Instead, they plan to be in Fiji (3D2), Samoa (5W), and Tonga (A3) this year.

Wrap-Up

That's it for this month, with thanks to Bob, KD1CT; Les, SP6CIK; Janusz, SP9FIH; Bill, W4ZV; Hrane, YT1AD, and The Daily DX (www.dailydx.com) for helping to make this month's column possible. You can follow The Daily DX on X (@dailydx). If you have any DX, Islands on the Air, or contest expedition news, photos, or newsletters, please send them to bernie@dailydx.com. Until next month, see you in the pileups! — Bernie, W3UR

Strays

Radio Club d'Haiti Celebrates their 75th Anniversary

On March 26, 2023, the Radio Club d'Haiti (RCH) celebrated its 75th anniversary at the Karibe Convention Center in Pétion-Ville, Haiti.

The RCH was founded in Port-au-Prince in 1948 to bring together radio enthusiasts throughout the country. Its purposes include the development and coordination of experimental research of its members, increasing the spirit of camaraderie among amateur radio operators and IARU member nations, providing services to the community, especially in times of regional or national natural disasters, and ensuring that its members comply with national and international laws governing radio communications. As it moves to the future, the RCH and its members look forward to continuing their service to the citizens of Haiti and the international community. — Chris Patterson, W3CMP/IH2M



President of the Radio Club d'Haiti Jean-Robert Gaillard, HH2JR (left), and Directeur Général du Conseil National des Télécommunications Joses Jean-Baptiste (right) signing the Memorandum of Understanding for training future amateur radio operators.

The World Above 50 MHz

Sporadic E Rocks ARRL January VHF Contest

The 2023 – 2024 winter Northern Hemisphere sporadic-E season had been lackluster throughout mid-January. The ARRL January VHF contest was scheduled for the weekend of January 20 – 21, and many entrants had low expectations for the band conditions. That outlook changed as strong, widespread E_s openings appeared, along with transequatorial propagation (TEP) starting in the evening on January 20 (21 UTC). Ron, K3FR (FM18), noted CO2QU (EL83) and CO7MS (FL01). From Kansas, KF0M (EM17), and I, NØJK (EM28), had E_s to Mexico, with XE2YWH (DL92), XE2N (DL95), and 6D5C (DL80) in for us after 0030Z on 50.313 MHz. The E_s center allowed a cross path for stations in the southeast states as well as Texas and Louisiana, in turn creating an E_s link to the South Pacific. Tim, W5TRL (EM10), said he had “near-pipeline conditions, netting 51 contacts with stations in Chatham Island, [mainland] New Zealand, and Australia.” The westernmost Australian stations that he worked were “VK5RM and VK5BC, both in PF95.” The K5QE (EM31) contest station in EM31 also contacted stations in Australia. Alton, N4IDH (EM71), worked ZL1RS using 100 W and a Moxon antenna elevated 10 feet. Rich, K1HTV (FM18), worked four New Zealand stations. The Australian operators later had an opening to Europe, as many VK3 stations worked those in Austria, France, and Italy at around 0900Z.

The next day, there was widespread E_s on 6 meters all day across the continental US. N7GP/R was active on Sunday afternoon from several rare Arizona Fred Fish Memorial Award (FFMA) grids, including the rare DM31. I noted strong E_s from Kansas to the western US states. At 1926Z, Mike, VP8NO (GD18), worked W7FN (CN88)! At 2322Z, Larry Lambert, NØLL (EM09), logged ZL1AKW. Paul, WG0G (EN35), worked ZL1AKW a few minutes later. W4ATM (EL98) worked ZL1RS at 0115Z. The E_s continued into the evening, extending northwest from Kansas to Washington state, which allowed me to work K7CW (CN87); it is a difficult path that is between single- and double-hop range. At the end of the contest (0359Z), Lance Collister, W7GJ (DN27), worked PY2XB (GG66). Many consider this to be one of the best-ever January VHF contest E_s openings.

TX5S Covers VHF/UHF and Microwave Bands

“Thanks to the skill of Andreas, N6NU, the [TX5S] group provided a varied selection for VHF/UHF/microwave enthusiasts,” said the team that conducted the recent TX5S DXpedition to Clipperton Island. On January 22, they reported making contacts on 6 meters. TX5S was in to North America via sporadic E starting at around 0100Z on January 23. They started on Q65 mode on 50.189 MHz to make Earth-Moon-Earth (EME) contacts, and then they switched to FT8 Fox and Hound mode. TX5S worked K2DRH (EN41), W3IP (FM19), KA9CFD (EN40), KA9FOX (EN43), and others on FT8. Scott, KA9FOX, first copied TX5S on Q65 mode. On January 23, they worked stations in South America and the South Pacific on 50.313 MHz. The following day, TX5S logged a few stations in Texas. WQ0P (EM19) and I decoded TX5S (at –18 dB) on 50.313 MHz at 2321Z on January 25. Dave, KJ9I; Lance, W7GJ, and Tim, NØTB, reported making EME contacts with TX5S. The team used the effective AG6EE portable EME array on 50 MHz. They were also on 1296 MHz EME and satellite IO-117 on 435.310 MHz. The Club Log TX5S report is as follows: 209 contacts on 50 MHz FT8, 17 contacts via 70-centimeter EME, 2 contacts on MFSK, 515 contacts via packet radio, and 57 contacts via 23-centimeter EME. They worked 13 countries on 6-meter FT8.

Quadrantid Meteor Shower

During the Quadrantid meteor shower on January 4, Larry Lambert, NØLL, operated portable on 6 meters from DM89. He made 43 MSK144 contacts, and his contact with WA4CQG (EM72) was his farthest, at a distance of 1,800 kilometers. The shower peak was predicted to be around 1300Z on January 4, but many operators noted that the peak seemed to occur at around 1900Z. Jay, NY2NY (FN30), noted strong signals from K2DRH (EN41), AC4TO (EM70), and others on 6 meters. Sid, K3SX (FM19), reported good conditions on 2 meters.


On the Bands

50 MHz. Brad, WF7T (EM66); Dave, N9HF (EL99), and Jim, K5ND (EM12), reported working ZL7DX on January 6 at around 0100Z. N9HF and W3LPL (FM19) worked ZL1RS on January 10. Ron, K3FR, had strong E_s to NØFJP (EN34) on January 12. Two days later, Frank, W3LPL, observed F2 to G8BCG and F4VPC. He said, “Reliable North Atlantic and North Pacific 6-meter F2 needs the solar flux to persist well above 200 for a few days.”

There was a strong and long-lasting opening from North America to New Zealand on January 16 – 17. Paul, NOØT (DN70), reported “multiple ZLs and ZL7DX.” Rich, K1HTV (FM19), worked TG9AJR (FK44) and had a PSK flag from ZL7DX. I, NØJK, copied ZL7DX working WZ9W (EM39) at 0006Z on January 17. Tim, W5TRL (EM10), made 11 New Zealand contacts. K5ND logged ZL2WHO (RE79) and ZL3AAD (RE68). Pete, K5CPR (EM13), worked three New Zealand stations. Bob, ZL1RS, made many North American contacts, including one with KDØPO in rare grid EM24. Bob said he now has 245 out of the 488 grids needed for the FFMA award! John, KFØM (EM17), said KCØY (EM17) worked ZL7DX at 0034Z. John arrived home too late to work ZL7DX himself, but he logged stations in Mexico as well as ZL3OY and ZL3WO.

From Guatemala, Juan, TG9AJR, had New Zealand in and noted a strong opening to Hawaii on January 16 – 17. He said he “worked KH6HI, NH6JC, NH6Y, and KH6TU on FT8, but also managed to make a nice contact with NH6JC on single sideband (SSB).” Jay, KØGU, noted “massive” E_s across North America that evening, so it is likely that there was an E_s-to-TEP mode of propagation. On January 18, there was F2 to Europe for the US east coast. Nelson, KD2CYU (FN20), had stations in Ireland, France, England, Northern Ireland, and Scotland in to his location, as well as the rare TF2MSN. N9PGG (FM05) worked TF2MSN at 1529Z.

Sporadic E continued into the week after the January VHF contest. In the afternoon on January 22, Bob, K2DRH (EN41), caught ZL7DX during a 5-minute opening at 2249Z. He mentioned that ZL7DX was operating his station remotely. KL7J and KL7HBK in Alaska were in to south Texas at around 2300Z. The propagation mode is unclear, but it was late in the afternoon for F2. I had E_s to British Columbia at the time. Mike, VP8NO (GD18), worked KL7J (BP40) at 2250Z — a 14,942-kilometer path. In the morning on January 23, there was sporadic E from Kansas to Arizona and Montana. At 1826 UTC, NØLL worked ZL7DX at 1801Z during a brief opening. This was very early for a South Pacific-to-North America path on 6 meters.

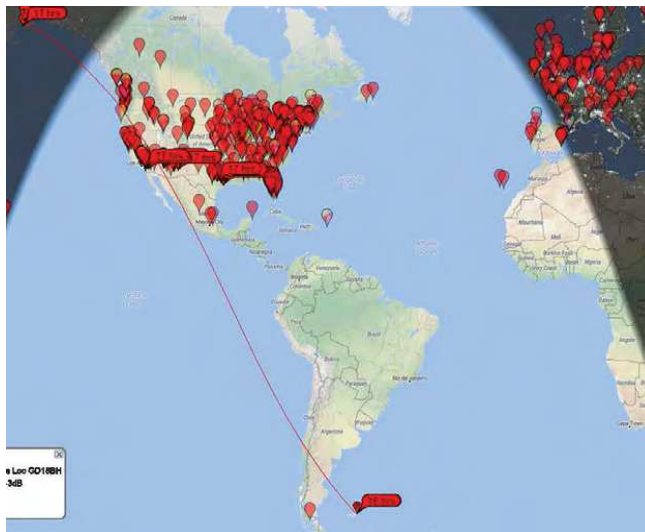

The PSK flags demonstrating the distance between Michael Harris, VP8NO, and Les Buchholz, KL7J. Mike worked Les at 2250Z on January 22, 2024. [www.pskreporter.info/pskmap]

On January 25, I, NØJK, logged XE2KK (DL96), XE1XJB (EK09), and XE1EE (DL90). In the morning on January 31, Robert, 3B9FR, was in to North America. Phil, NØPB (EM39), worked 3B9FR at 1433Z during a 2-minute opening. Phil said the contact was “total luck, I think.”

144 MHz. Jim, K5ND (EM12), worked W9RM (DM58) on MSK144 and a station in EL08 via tropospheric propagation during the January VHF contest. It was a new grid for him. Sam, K5SW (EM25), worked WB5ZDP (EM13) on CW. Despite widespread — and some short — E_s on 6 meters, I received no reports of 2-meter sporadic E.

1296 MHz. The 2023 DUBUS EME 1296 MHz Contest results are in. The top five winners were OK2DL, KØPRT, OK1DFC, G4CCH, and PA3DZL. This contest is CW and SSB, not digital. The next DUBUS EME 1296 MHz contest is scheduled for May 10, 2024, and it will start at 0000 UTC and end at 2359 UTC on May 12. You can read the contest announcement at www.marsport.org.uk/dubus/emecontest2024.pdf.

Here and There

Ray, W9VHF, has a nearly complete collection of the *50 MHz DX Bulletin*. The bulletin was started by Harry Schools, KA3B, in 1990. He is willing to ship them to anyone who is interested in taking them. Ray can be emailed at ray@w9vhf.com.

The 2024 Central States VHF Society Conference will be held in Cedar Rapids, Iowa, on July 25 – 28. More information about the conference can be found at www.csvhfs.org.

Convention and Hamfest Calendar

A = AUCTION

D = DEALERS / VENDORS

F = FLEA MARKET

H = HANDICAP ACCESS

Q = FIELD CHECKING OF QSL CARDS

R = REFRESHMENTS

S = SEMINARS / PRESENTATIONS

T = TAILGATING

V = VE SESSIONS

Abbreviations

Spr = Sponsor

Tl = Talk-in frequency

Adm = Admission

Alabama (Mobile) — Apr. 27 D F H Q R S V

8 AM – 2 PM. Spr: Mobile ARC. Greater Gulf State Fairgrounds, 1035 Cody Rd. N. Tl: 146.940. Adm: \$7. www.w4iax.net

Arizona (Prescott Valley) — Apr. 20 D H R T

8 AM – noon. Spr: Amateur Radio Council of Arizona. Granville Elementary School, 5250 Stover Dr. Adm: \$5. www.prescotthamfest.org

Arizona (Sierra Vista) — May 4 F H R T V

7 AM. Spr: Cochise ARA. 2756 S. Moson Rd. Tl: 146.76 (162.2 Hz). Adm: Free. www.k7rdg.org

California (Sonoma) — Apr. 27 D F H R T V

7 AM – noon. Spr: Valley of the Moon ARC. First Congregational Church of Sonoma, 252 W. Spain St. Tl: 145.35 (88.5 Hz). Adm: Free. www.vomarc.org

75TH ANNUAL INTERNATIONAL DX CONVENTION

April 12 – 14, Visalia, California

D H Q R S

Fri. 8 AM – 6 PM, Sat. 8 AM – 10 PM, Sun. 7:30 AM – 11:30 AM. Spr: Southern California DX Club. Visalia Convention Center, 303 E. Acequia Ave. Adm: \$170 Advance, \$185 door. www.dxconvention.org

Colorado (Longmont) — Apr. 6 D F Q S V

8 AM – noon. Spr: Longmont ARC. Boulder Co. Fairgrounds Event Center, 9595 Nelson Rd. Tl: 147.270 (100 Hz), 448.800 (88.5 Hz). Adm: \$5. www.w0eno.org

Connecticut (Dayville) — Apr. 28 D F H R

8 AM – noon. Spr: Eastern Connecticut ARA. Killingly High School Cafeteria, 226 Putnam Pike. Tl: 147.225 (156.7 Hz). Adm: \$5. www.ecara.net

Connecticut (Gales Ferry) — Apr. 13 R

8 AM seller registration, 9 AM buyer registration, 10 AM auction begins. Spr: Southeastern Connecticut ARS. Our Lady of Lourdes Parish Hall, 1650 CT Rte. 12. Tl: 146.730 (156.7 Hz). Adm: \$5. www.secars.org

ARRL DELAWARE STATE CONVENTION

April 20, Georgetown, Delaware

D F H Q R S T V

8 AM – 3 PM. Spr: Sussex ARA. Cheer Center, 20520 Sand Hill Rd. Tl: 147.090 (156.7 Hz). Adm: \$7. Email: ashton@mchsi.com

Florida (Tampa) — Apr. 13 H Q R T V

7 AM – noon. Spr: Tampa ARC. Tampa ARC clubhouse, 7801 N. 22nd St. Tl: 147.105 (146.2 Hz). Adm: \$5. Email: n4web@hamclub.org

Georgia (Savannah) — Apr. 27 F H T

8 AM – 1 PM. Spr: Coastal ARS. Savannah Hilton Head Regional Airport Recreation Bldg., Crossroads Pkwy. Tl: 442.70. Adm: Free. www.coastalamateurradiosociety.net/wpw4lhsblog/?page_id=1357

Idaho (Kamiah) — Apr. 20 D F H R S V

8 AM – 3 PM. Spr: 3 Rivers ARC. Clearwater Valley ARC. American Legion Hall, 618 Main St. Tl: 146.62 (88.5 Hz). Adm: \$5. www.3riversarc.club

Illinois (Sandwich) — May 5 D H R T

7 AM – 1 PM. Spr: Kishwaukee ARC. Sandwich Fairgrounds, 1401 Suydam Rd. Tl: 146.73 (100 Hz), 146.520 simplex. Adm: \$8 Advance, \$10 door. www.karc-club.org

Indiana (Columbus) — Apr. 13 D H R V

8 AM – noon. Spr: Columbus ARC. Columbus North High School Cafeteria, 1400 25th St. Tl: 146.79 (103.5 Hz). Adm: \$5. Email: idlewine@comcast.net

Indiana (Marion) — May 4 D H R S T V

9 AM – 2 PM. Spr: Cass, Grant, Howard, Miami Counties. Hart's Celebration Center, 3031 E. 450 N. Tl: 146.790 (141.3 Hz). Adm: \$5. www.ncihamfest.com

Iowa (Des Moines) — Apr. 27 D F H Q R S V

8 AM – 1 PM. Spr: Des Moines Radio Amateurs' Association. Iowa State Fairgrounds Elwell Family Food Center, 3000 E. Grand. Tl: 146.940 (114.8 Hz). Adm: \$10; 12 and under, free. www.dmraa.com/hamfest

Maryland (Maugansville) — May 4 D F H Q R S T V

7 AM – 12:30 PM. Spr: Antietam Radio Association. Maugansville Bible Brethren Church, 17904 Binkley Ave. Tl: 147.09 (100.0 Hz). Adm: \$7. www.antietamradio.org

Maryland (Odenton) — Apr. 21 D F H R T

7:30 AM – noon. Spr: Maryland Mobileers ARC. Odenton Volunteer Fire Company, 1425 Annapolis Rd. Tl: 146.805 (107.2 Hz). Adm: \$5. www.sites.google.com/view/marylandmobileers/hamfest?authuser

Michigan (Burnips) — May 4 F H R

8 AM – noon. Spr: Allegan Co. ARC. Salem Township Hall, 3003 142nd. Tl: 147.240 (94.8 Hz). Adm: \$5. www.ac8rc.org

Michigan (Cadillac) — May 4 D F H R V

8 AM – noon. Spr: Wexauke ARC. Mackinaw Trail Middle School, 8401 S. Mackinaw Trail. Tl: 146.980. Adm: \$5. www.wexaukeearc.org

Michigan (Centreville) — Apr. 20 F H R T V

8 AM – noon. Spr: St. Joseph Co. Michigan ARC. Saint Joseph Co. Grange Fair, S. Franklin St. Gate 52. Tl: 145.310 (123 Hz). Adm: \$5. Email: fuseboxr@hotmail.com

Minnesota (Brainerd) — Apr. 27 D F H Q R

9 AM – 1 PM. Spr: Brainerd Area ARC. Brainerd National Guard Armory, 1115 Wright St. Tl: 147.225. Adm: \$5. www.brainerdham.org

Minnesota (East Grand Forks) — Apr. 20 F H Q R S V

8 AM – 1 PM. Spr: FORX ARC. Heritage Village, 219 20th St. NE. Tl: 146.940 (123.0 Hz). Adm: \$10. www.wa0jxt.org

OZARKCON

April 5 – 6, Branson, Missouri

D F H R S

8 AM – 5 PM. Spr: Four State QRP Group. Stone Castle Hotel, 3050 Green Mountain Dr. Adm: \$15 Advance, \$20 door. www.ozarkcon.com

Missouri (Kansas City) — Apr. 20 D F H R S V

6 AM – 1 PM. Spr: Ararat Shrine ARC. Ararat Shrine Temple, 5100 Ararat Dr. Tl: 145.130 (151.4 Hz). Adm: Free. www.hambash.us

Missouri (Palmyra) — May 4 D F H R T V

8 AM – noon. *Spr:* Hannibal ARC, Western Illinois ARC.
 Palmyra American Legion, 600 Short St. *Tl:* 146.625 (103.5 Hz).
Adm: \$8 building access, \$5 tailgating access.
www.w0kem.com

Missouri (Perryville) — Apr. 20 D F H R T V

8 AM – 1 PM. *Spr:* River Hills ARC. Fraternal Order of Eagles,
 2746 W. St. Joseph St. *Tl:* 147.315 (100.0 Hz). *Adm:* \$5.
www.facebook.com/w0rhx

Nebraska (Bellevue) — Apr. 13 F R

9 AM – 1 PM. *Spr:* Bellevue ARC. Reed Community Center,
 1200 Bellevue Blvd. S. *Tl:* 147.390 (131.8 Hz). *Adm:* \$5.
www.bellevuearc.org

New Hampshire (Moultonborough) — Apr. 13 D F H R T

8 AM – 1 PM. *Spr:* Lakes Region Repeater Association.
 Moultonborough Function Hall, 139 Old Rte. 109. *Tl:* 147.03
 (88.5 Hz), 444.700 (123.0 Hz). *Adm:* \$10. www.w1bst.org

New York (Queensbury) — Apr. 13 D F H

8 AM – noon. *Spr:* Warren Co. Radio Club. Aviation Mall,
 57 Aviation Rd. *Tl:* Prospect 146.730 (100 Hz), Gore 147.120
 (123 Hz), Burch 146.774 (146.2 Hz). *Adm:* Free.
www.w2wcr.org/events/swapmeet

North Carolina (Goldsboro) — May 4 F

8 AM – noon. *Spr:* Wayne Co. ARA. The First Church,
 1100 The First Church Rd. *Tl:* 146.850 (88.5 Hz). *Adm:* Free.
www.k4cyp.com

North Carolina (Winston-Salem) — Apr. 13 D F H T

7 AM – 11:30 AM. *Spr:* Forsyth ARC. Robinhood Road Baptist
 Church, 5422 Robinhood Rd. *Tl:* 146.47 (100 Hz). *Adm:* \$5.
www.w4nc.com

Ohio (Athens) — Apr. 28 D F H R T V

8 AM – noon. *Spr:* Athens Co. ARA. Athens Community Center,
 701 E. State St. *Tl:* 145.15. *Adm:* \$5. www.ac-ara.org

Ohio (Bidwell) — Apr. 13 D F H Q R T V

8 AM – 1 PM. *Spr:* Mid-Ohio Valley ARC. Fellowship of Faith
 Church, 20344 State Rt. 554. *Tl:* 147.060 (74.4 Hz). *Adm:* \$5.
 Email: doddiesel@hotmail.com

Ohio (Cuyahoga Falls) — Apr. 13 D F H Q R S V

8 AM – 1 PM. *Spr:* Cuyahoga Falls ARC, Inc. Emidio & Sons
 Expo Center, 48 E. Bath Rd. *Tl:* 147.270, 444.850 (both
 110.9 Hz). *Adm:* \$7 Advance, \$8 door. www.w8vpv.org/hamfest

Ohio (Dover) — Apr. 27 D F H R V

8 AM – 1 PM. *Spr:* Tusco ARC. Tuscarawas Co. Fairgrounds,
 259 S. Tuscarawas Ave. *Tl:* 146.730 (71.9 Hz). *Adm:* \$5.
www.w8zx.net/hamfest

Ohio (Toledo) — May 5 D F H

9 AM – 1:30 PM. *Spr:* Lucas Co. ARES. Toledo Speedway,
 5639 Benore Rd. *Tl:* 146.940 (103.5 Hz). *Adm:* \$5.
www.lucasares.org

ARRL OKLAHOMA STATE CONVENTION

April 12 – 13, Claremore, Oklahoma

D F H Q S V

Fri. 4 PM – 9 PM, Sat. 8 AM – 3 PM. *Spr:* Green Country Ham-
 fest, Inc. Claremore Expo Center, 400 Veterans Pkwy. *Tl:* 147.09
 (88.5 Hz). *Adm:* \$8 Advance, \$10 door; kids under 12, free.
www.greencountryhamfest.org

Pennsylvania (Bristol) — May 5 D F H Q R S T V

7 AM – 2 PM. *Spr:* Warminster ARC. Bucks Co. Community
 College-Lower Bucks Campus, 1304 Veterans Hwy. (Rte. 413).
Tl: 147.090 (131.8 Hz). *Adm:* \$8. www.wp.k3dn.org/hamfest

Pennsylvania (Spring Grove) — Apr. 27 D F H Q R S T V

8 AM – 1 PM. *Spr:* York Hamfest Foundation. Elicker's Grove
 Park, 511 Roths Church Rd. *Tl:* 147.330 (123.0 Hz). *Adm:* \$7.
www.yorkhamfest.org

Tennessee (Bartlett) — Apr. 6 D F H V

9 AM – 3 PM. *Spr:* Mid-South ARA. Bartlett Station Municipal
 Center Auditorium, 5868 Stage Rd. *Tl:* 147.63 (107.2 Hz).
Adm: Free. www.maraonline.org/freefest

Tennessee (Greeneville) — Apr. 20 F H R T V

8 AM – noon. *Spr:* Andrew Johnson ARC. Greene Co. Fair-
 grounds, 123 Fairgrounds Ln. *Tl:* 145.390 (88.5 Hz). *Adm:* \$10.
www.greenevillehamfest.com

Tennessee (Murfreesboro) — Apr. 27 D H R

8 AM – 2 PM. *Spr:* Short Mountain Repeater Club. First Cum-
 berland Presbyterian Church, 907 E. Main St. *Tl:* 146.910.
Adm: \$5. www.smrclub.com

Texas (Amarillo) — Apr. 27 H Q R S T V

9 AM – 2 PM. *Spr:* Panhandle ARC. AmTech Career Aca-
 demy, 3601 Plains Blvd. *Tl:* 146.94 (88.5 Hz). *Adm:* Free.
www.w5wx.org

Texas (Belton) — Apr. 13 D F H R T V

7 AM – 1 PM. *Spr:* Temple ARC. Bell Co. Expo Center, 301 W.
 Loop 121. *Tl:* 146.82 (123.0 Hz). *Adm:* \$10. www.tarc.org

Virginia (Ruckersville) — Apr. 13 D F H Q R S V

8 AM – 2 PM. *Spr:* Greene Co. Virginia ARC. Ruckersville
 Elementary School, 105 Progress Pl. *Tl:* 145.470 (151.4 Hz).
Adm: \$10; kids under 14, free. www.thawfest.net

Washington (Union Gap) — Apr. 13 F R T

9 AM – 2 PM. *Spr:* N7YRC Group. Yakima Valley Emergency
 Management, 2403 S. 18th St. *Tl:* 444.750 (131.8 Hz), 146.520.
Adm: Free. Email: kc7vqr@arri.net

Wisconsin (Cedarburg) — Apr. 27 D F H R

8 AM – noon. *Spr:* Ozaukee Radio Club, Inc. Ascension
 Columbia St. Mary's Center (Milwaukee Curling Club),
 W67N890 Washington Ave. *Tl:* 146.97 (127.3 Hz). *Adm:* \$7.
www.ozaukeeradioclub.org

Wisconsin (Stoughton) — Apr. 13 D F H R V

8 AM – noon. *Spr:* Madison Area Repeater Association. Mandt
 Community Center, 400 Mandt Pkwy. *Tl:* 147.150 (123.0 Hz).
Adm: \$8 Advance, \$10 door. www.w9hsy.org

Wisconsin (Superior) — May 4 D F H Q R V

9 AM – 1 PM. *Spr:* Arrowhead Radio Amateurs Club. Head of
 the Lakes Fairground, 4700 Tower Ave. *Tl:* 146.940 (103.5 Hz).
Adm: \$10. www.thearac.org

To All Event Sponsors

Before making a final decision on a date for your event, you are encouraged to check the Hamfest and Convention Database (www.arri.org/hamfests-and-conventions-calendar) for events that may already be scheduled in your area on that date. You are also encouraged to register your event with HQ as far in advance as your planning permits. See www.arri.org/hamfest-convention-application for an online registration form. Dates may be recorded up to 2 years in advance.

Events that are sanctioned by ARRL receive special benefits, including an announcement in these listings and online. Sanctioned conventions are also listed in *The ARRL Letter*. In addition, events receive donated ARRL prize certificates and handouts. Once the form has been submitted, your ARRL Director will decide whether to approve the date and provide ARRL sanction.

The deadline for receipt of items for this column is the **1st of the second month preceding publication date**. For example, your information must arrive at HQ by **May 1** to be listed in the **July** issue. Information in this column is accurate as of our deadline; contact the sponsor or check the sponsor's website for possible late changes, driving directions, and other event details. Please note that postal regulations prohibit mention in QST of games of chance, such as raffles or bingo.

Promoting your event is guaranteed to increase attendance. As an approved event sponsor, you are entitled to special discounted rates on QST display advertising and ARRL web banner advertising. Call ARRL's toll-free number at 1-800-243-7768, or email ads@arri.org.

Special Event Stations

Working special event stations is an enjoyable way to help commemorate history. Many provide a special QSL card or certificate!

Mar. 30 – Apr. 10, 0000Z – 2359Z, W5E, Greenville, TX. Sabine Valley Amateur Radio Association (K5GVL). **Total Solar Eclipse in Hunt County, Texas.** 7.235 14.280 21.400 28.450. QSL. Sabine Valley Amateur Radio Association, P.O. Box 843, Greenville, TX 75403-0843. www.k5gvl.com/w5e-total-solar-eclipse-special-event-station

Apr. 1 – Apr. 7, 0000Z – 2359Z, W2A, New York, NY. New York City DX Association. **Global Autism Awareness Week.** 14.250. QSL. NYCDXA, 149 Marine Ave. # 6F, Brooklyn, NY 11209. www.qrz.com/db/w2ndx

Apr. 8, 1600Z – 2100Z, W2E, Rochester, NY. Roc-Ham Radio Network. **Solar Eclipse 2024.** 20 and 10 meters; 14.313 28.405; AllStar 2585. QSL. John Derycke, W2JLD, 85 Amherst St., Apt. 2, Rochester, NY 14607. www.roc-ham.net

Apr. 9 – Apr. 13, 0300Z – 1200Z, W4S, Lakeland, FL. Sun 'n Fun Fly In, Inc. **Sun 'n Fun Aerospace Expo.** 7.250 14.225 146.685 (127.3). QSL. Geoff Schuck, P.O. Box 90853, Lakeland, FL 33804. *Frequencies will be spotted on DX Summit; QSL cards will be sent to all HF contacts.*

Apr. 12 – Apr. 13, 1600Z – 2100Z, K8L, Youngstown, OH. WF8U and KC3GFU. **National Library Week 2024.** 7.074 14.074; SSB FT8; 40 and 20 meters. QSL. K8L, 239 Elvira Ct., McDonald, OH 44437. kd8ely@gmail.com or www.qrz.com/db/kd8ely

Apr. 12 – Apr. 15, 0001Z – 2359Z, K9L/W9L, Effingham, IL. National Trail Amateur Radio Club. **Remembering Abraham Lincoln.** 14.312. QSL. NTARC/K9UXZ, P.O. Box 903, Effingham, IL 62401. www.nationaltrailarc.org or www.qrz.com/db/k9uxz

Apr. 12 – Apr. 22, 1400Z – 0600Z, N5M, all New Mexico. WA5LHM and WA5POK. **Celebrating 60 Years of Friendship and Ham Radio with the Hatch Green Chili Pepper Run to 33 New Mexico Counties.** 7.060 7.260 14.060 14.260. Certificate. Scott Kendall, WA5LHM, 1804 Louise St., Georgetown, TX 78262. www.facebook.com/groups/996268021434046

Apr. 13, 1600Z – 2300Z, N16IW, San Diego, CA. USS Midway Museum Ship. **Commemorating USS Midway Conducting the First Airship Ops on CV (Apr. 7, 1949).** 7.250 14.320; 140.070 PSK31; D-STAR on PAPA System repeaters. QSL. USS Midway Museum Ship COMEDTRA, 910 N. Harbor Dr., San Diego, CA 92101. www.qrz.com/db/n16iw

Apr. 13 – Apr. 14, 1500Z – 2000Z, K4S, Nokomis, FL. Tamiami Amateur Radio Club. **Venice Shark's Tooth Festival.** 14.320 SSB. QSL. Tamiami ARC, P.O. Box 976, Nokomis, FL 34274. www.tamiamiarc.org

Apr. 15 – Apr. 22, 1600Z – 1600Z, W2W, Rochester, NY. Roc-Ham Radio Network. **World Amateur Radio Day 2024.** Echo-Link conference 531091; AllStar 2585, 47620, 47918, 531310; 14.313 28.405. QSL. John Derycke, W2JLD, 85 Amherst St., Apt. 2, Rochester, NY 14607. *The special event net is on April 18 – 19, 1700Z – 0200Z.* www.roc-ham.net

Apr. 17, 2000Z – 2200Z, K6SRH, Sahuarita, AZ. Sam's Radio Hams. **SRH Special Event Station at the Titan Missile Museum.** 14.315. QSL. Paul Craft, 357 Morningside Ter., Palmdale, CA 93551. Digital QSL available. www.qrz.com/db/k6srh

Apr. 19 – Apr. 23, 1700Z – 2359Z, K4H, Camden, SC. Kershaw County Amateur Radio Club. **Battle of Hobkirk's Hill (Second Battle of Camden Hill).** 14.325 21.325 28.325. E-certificate, email info@kc4rc.com for details. www.kc4rc.com

Apr. 20, 1300Z – 2200Z, N5T, Springdale, AR. Bella Vista Radio Club. **Northwest Arkansas Train Mobile.** 7.040 7.190 14.040 14.260. QSL. Don Banta, K5DB, 3407 Diana St., Springdale, AR 72764. www.bellavistaradioclub.org

Apr. 26 – Apr. 28, 1900Z – 1900Z, W0ZSW, Minneapolis, MN. Handiham Radio Club. **Handiham Program 57th Anniversary.** 7.200 14.250 21.350 28.350. QSL. Courage Kenny Handiham Program, 3915 Golden Valley Rd., MR 78446, Minneapolis, MN 55422. www.handiham.net

Apr. 27, 1400Z – 1830Z, K9N, De Pere, WI. Green Bay Mike & Key Club, Inc. **The 125th Anniversary of the Founding of St. Norbert College in De Pere, Wisconsin.** 3.915 7.270 14.285. E-certificate only, email contact@k9eam.org. www.k9eam.org

Apr. 27, 1200Z – 2359Z, KG4NXO, Ocala, FL. Marion County Emergency Management. **MERT20 Special Event.** 3.862 7.262 14.262; D-STAR 146.790 REF-037. Certificate & QSL. Kraig Pritts, 6637 NE 5th Ln., Ocala, FL 34470. www.mert20.org

Apr. 27, 1700Z – 2300Z, W1M, Rochester, NY. Roc-Ham Radio Network. **International Marconi Day 2024.** 20 and 10 meters; 14.313 28.405; AllStar 2585, 47620, 47918, 531310. QSL. John Derycke, W2JLD, 85 Amherst St., Apt. 2, Rochester, NY 14607. www.roc-ham.net

Apr. 27 – Apr. 28, 0200Z – 2300Z, N3P/PanCan, New Kensington, PA. Skyview Radio Society. **HAMS for PanCAN — Bonus Station.** 3.960. 7.172; SSB. Certificate. Skyview Radio Society, N3P, 2335 Turkey Ridge Rd., New Kensington, PA 15068. rybar1949@gmail.com or www.skyviewradio.net

Certificates and QSL cards: To obtain a certificate from any of the special event stations offering them, send your QSO information along with a 9 × 12-inch self-addressed, stamped envelope (3 units of postage) to the address listed in the announcement. To receive a special event QSL card (when offered), be sure to include a self-addressed, stamped business envelope along with your QSL card and QSO information.

Special Events Announcements: For items to be listed in this column, use the ARRL Special Events Listing Form at www.arrl.org/special-events-application, or email information to events@arrl.org.

Submissions must be received by ARRL HQ no later than the 1st of the second month preceding the publication date; a special event listing for **July QST** would have to be received by **May 1**. In addition to being listed in QST, your event will be listed on the ARRL Web Special Event page. **Note:** All received events are acknowledged. If you do not receive an acknowledgment within a few days, please contact us. ARRL reserves the right to exclude events of a commercial or political nature.

You can view all received Special Events at www.arrl.org/special-event-stations.

This Month in **QEX**

QEX magazine is a forum for the free exchange of ideas among communications experimenters. All ARRL members can access the digital edition of **QEX** as a member benefit (www.arrl.org/magazines). Print subscriptions are available and sold separately; see www.arrl.org/qex.

Coming up in the March/April 2024 issue of **QEX**:

- Gary Johnson, NA6O, describes a laboratory RF power meter.
- Mark R. Titchener, ZL4CDE, maps a binary code to Morse code, facilitating the efficient exchange of binary-coded messages.
- Richard Place, WB2JLR, adds networks to *4nec2* models.
- Greg Hebner, AG5FE, studies the vertical antenna with a spiral counterpoise.
- Steve Geers, KA8BUW, accurately predicts crystal filter performance.
- In his essay series, Eric P. Nichols, KL7AJ, discusses a self-exam.

QEX is edited by Kazimierz “Kai” Siwiak, KE4PT (ksiwia@arrl.org), and is published bimonthly.

Would you like to write for **QEX**? We pay \$50 per published page for full articles and **QEX** Technical Notes. Get more information and an Author Guide at www.arrl.org/qex-author-guide.

Feedback

■ In the January 2024 issue of **QST**, “FT8 Visualized” contains an error. The second and third sentences in the first paragraph under the “Final FT8 Format and More Resources” subhead should read, “These are assembled in groups of three and converted to Gray code to get 58 symbols or transmitted tones. Add the three Costas arrays of seven symbols each (21 symbols in total) to determine that an FT8 message is 79 symbols, or the equivalent of 237 binary bits.” This has since been corrected in the digital edition.

■ In the February 2024 issue of **QST**, “How’s DX?” contains an error. The first paragraph states that Alejandro Selkirk Island had never been activated before, but the CBØZ operation was conducted there in 2020. This has since been corrected in the digital edition.

Answers to the Crossword Puzzle on Page 60 of This Issue

Across	27	43	Down	14	30	47
	CHAT	BDM		NORTE	POLAR	YAESU
1			1			
HSTP	28	45	HAMS	17	31	48
	TOE	FRUITED		BOSE	FREQUENCY	ANGER
5			2			
RPMS	29	47	SCOUT	20	32	49
	SPFS	YEOMAN		HOTEL	ANTED	NITER
9			3			
ARFS	32	50	TROPO	22	35	51
	ABUSE	EDS		UHURA	GUSTS	HVAC
13			4			
ACRE	33	51	PENPALS	23	36	52
	EVA	HARMONIC		NASA	ELSE	CHEL
14			5			
NOISE	34	53	ROUTS	24	40	53
	TOR	MENA		ROVES	AMMONIA	MER
15			6			
TEST	35	55	PINS	25	43	54
	GENERAL	WAVELENGTH		DEALT	BERLE	ETA
16			7			
MOONBOUNCE	37	57	MSC	27	44	55
	REL	ETCH		CBERS	DOME	WPM
18			8			
TPKS	38	58	SEE	29	46	56
	ALE	PHASE		STAFF	IDAHO	AHI
19			9			
SUPPORTS	39	59	ATTIC			
	ULTRA	IEEE				
20			10			
HIE	40	60	REPEATERS			
	ASST	RAYO				
21			11			
TOASTS	41	61	FSK			
	FAQ	MICU				
22			12			
UNOCARD	42	62	STS			
	SSES	ARRL				
26						
LEE						

Notes

- 1A HSTP = Hyperspace Transaction Protocol
- 37A REL = Recommended Exposure Limit
- 42A SSSES = Senior Software Engineers
- 43A BDM = Background Debug Mode
- 53A MENA = Middle East and North Africa
- 61A MICU = Medical Intensive Care Unit
- 52D CHEL = “En-aitch-el,” shortened to “chel” in Canada

Field Organization Reports — January 2024

Public Service Honor Roll

This listing recognizes radio amateurs whose public service performance during the month indicated 70 or more points in six categories. Details on the program can be found at www.arrl.org/public-service-honor-roll.

553 WA7PTM	215 KK4PUX	155 KB9IME KE5YTA	130 W2PAX K3JL	111 KD8UUB	98 KD2TDG	W4TTO KB0DTI	85 W4PXE KB3MXK	WB8RGE N2TSO	80 AE2EY KR4ST	78 W4NHO	73 N0JAR
445 N9VC	191 W5WMC	150 WA0QLW KC9FXE WO2H	K8MDA N2JBA N1UMJ WZ0C	110 AD4DO KM4WHO KA9MZJ W9GRG NW3X	97 KC1HHO	87 K4FHR KT4WX KV2J	KB1TCE K6JT K1XFC	83 W7MIN AA3N	KA8BJA W2ITT K8RDN KB1NAL	75 KN4AAG N2GS	72 KM4WXX W5XX
415 AD8CM	189 KB5PGY		128 KD8ZCM	94 WB8R WB2VUF WW3S		86 N5RH	84 KT5EM KB4OLY	81 W2ARP	79 KN6ICE	74 W3ZR	70 K5OB NT1N
406 W9RY	185 W4DNA N1ILZ	146 KC8T WV5Q	127 W4CAC	93 KG5NNA KB1NMO K4DL	The following stations qualified for PSHR in previous months, but were not acknowledged in this column yet. (Dec. 2023) KK4PUX 225, K3JL 130, W2AH 120, KC3MAL 113, KB2QO, KO4OL 110, W4CAC 108, K2MTG, K3YAK, KA2HZP, N2GS, AA3SB 100, WW3S 96, KB3YRU 93, N3KRX, W4NHO 92, WX2DX, WA3QPX 90, WB2VUF 85, KA2GQQ 84, WB8RGE 81, W2QMI 80, K2PHD 78, WB4ZDU 75, N3SW 73. (Nov. 2023) KK4PUX 220, W4CAC 119, N3SW 90.						
400 WA3EZN	180 ND8W	145 W4CMH	125 KC3MAL KE4RS	109 KB9GO KC9UC N3SW WA3QPX WA2BBS N8MRS W8GSR KL7RF K8KRA KB8HJJ W8MAL N8OD K3RC W4KX K8ED W2QMI WX2DX AB9ZA N1CVO	Section Traffic Manager Reports The following Section Traffic Managers reported: AK, AL, AR, AZ, CO, CT, DE, EMA, ENY, EPA, GA, IL, IN, KS, KY, LA, MDC, ME, MI, MO, MS, NC, ND, NFL, NLI, NNJ, NNY, NTX, OH, OR, ORG, RI, SD, SFL, SJV, SNJ, STX, TN, UT, VA, WCF, WI, WMA, WPA, WWA.						
394 K6DDZ	177 W0PZD	143 W8DJG	123 KN4WX	104 W8IM	Section Emergency Coordinator Reports The following Section Emergency Coordinators reported: AR, CT, DE, ENY, EPA, EWA, GA, KY, MI, MO, MS, NLI, NM, NNJ, NNY, NV, ORG, SCV, SNJ, STX, TN, VA, WCF, WMA, WPA, WTX, WWA, WY.						
363 W7EES	175 AC8NP	142 KE8DON WB3YRU	121 KD2QAR	101 K1HEJ	Brass Pounders League The BPL is open to all amateurs in the US, Canada, and US possessions who report to their SMs a total of 500 or more points or a sum of 100 or more origination and delivery points for any calendar month. Messages must be handled on amateur radio frequencies within 48 hours of receipt in standard ARRL radiogram format. Call signs of qualifiers and their monthly BPL total points follow.						
355 WM5N	170 KT5SR K8AMH	140 KR4PI WB9QPM	120 KF0BPN N0DMP WC4FSU WA4VGZ KY2D	100 KZ8Q WB4RJW NX9K AA3SB W1KX KB8GUN WB8SIQ KA5AZK N4CNX W4EDN KB8PGW K3YAK KA2HZP W2OOD N1LAH KC1KVY W1TCD	89 K2MTG N0ET	NX9K 2,180, KY2D 1,450, W2AH 1,046, N9CK 879, WB9WKO 849, WA3QLW 794, N9VC 686, KW1U 652, K8ED 508.					
308 KO4KUS	169 KV8Z	137 WB8YYS	100 KZ8Q WB4RJW NX9K AA3SB W1KX KB8GUN WB8SIQ KA5AZK N4CNX W4EDN KB8PGW K3YAK KA2HZP W2OOD N1LAH KC1KVY W1TCD	89 K2MTG N0ET							
306 W7PAT	168 KD2LPM	167 WM2C	115 K9LGU WB9WKO N3GE	88 KF7GC							
279 KE8BYC	167 WM2C	165 AC0KQ N8SY N5MKY	115 K9LGU WB9WKO N3GE	88 KF7GC							
267 K3EAM	165 AC0KQ N8SY N5MKY	134 KB8RCR	115 K9LGU WB9WKO N3GE	88 KF7GC							
261 KC8YVF	160 K7OED										
240 N2CL											
229 W9EEU											

Volunteer Monitor Program Report

The Volunteer Monitor (VM) Program is a joint initiative between ARRL and the FCC to enhance compliance in the Amateur Radio Service. This is the January 2024 activity report of the VM Program.

- ◆ An advisory notice was sent to an operator in Ohio for deliberate interference and use of a false call sign on 7.185 KHz.
- ◆ An advisory notice was sent to a repeater owner in New York City for operation of an AllStarLink network on the national calling frequency of 145.520 MHz.
- ◆ Operators in Georgia and Pennsylvania received advisory notices for out-of-band operation. The Georgia operator is a General and used 14.211 MHz on SSB for DX. General-class SSB frequencies on 20 meters start at 14.225 MHz. The operator in Pennsylvania worked SSB DX on 7.120 MHz. Forty-meter voice privileges start at 7.125 MHz.
- ◆ Two operators in Florida and one in West Virginia received


advisory notices for improper bandwidth. The operators in Florida were 9 kHz wide, and the operator in West Virginia was 11 kHz wide. Section 97.307(a) of Commission rules states that “no station shall occupy more bandwidth than necessary for the information rate and emission being transmitted.”

- ◆ An operator in Florida received an advisory notice for operation on a license that expired in 2022, and an operator in Iowa received an advisory notice for operation on a license that expired in 2014.

- ◆ The VM Program Administrator participated in two meetings with the FCC. One case was referred from the FCC to the VM Program for evidence gathering. A VM Program presentation was made to a club in Harrisburg, Pennsylvania.

The totals for December 2023 monitoring were 2,410 hours on HF frequencies, and 3,960 hours on VHF frequencies and above, for a total of 6,370 hours. — *Thanks to Volunteer Monitor Program Administrator Riley Hollingsworth, K4ZDH*

A Look Back

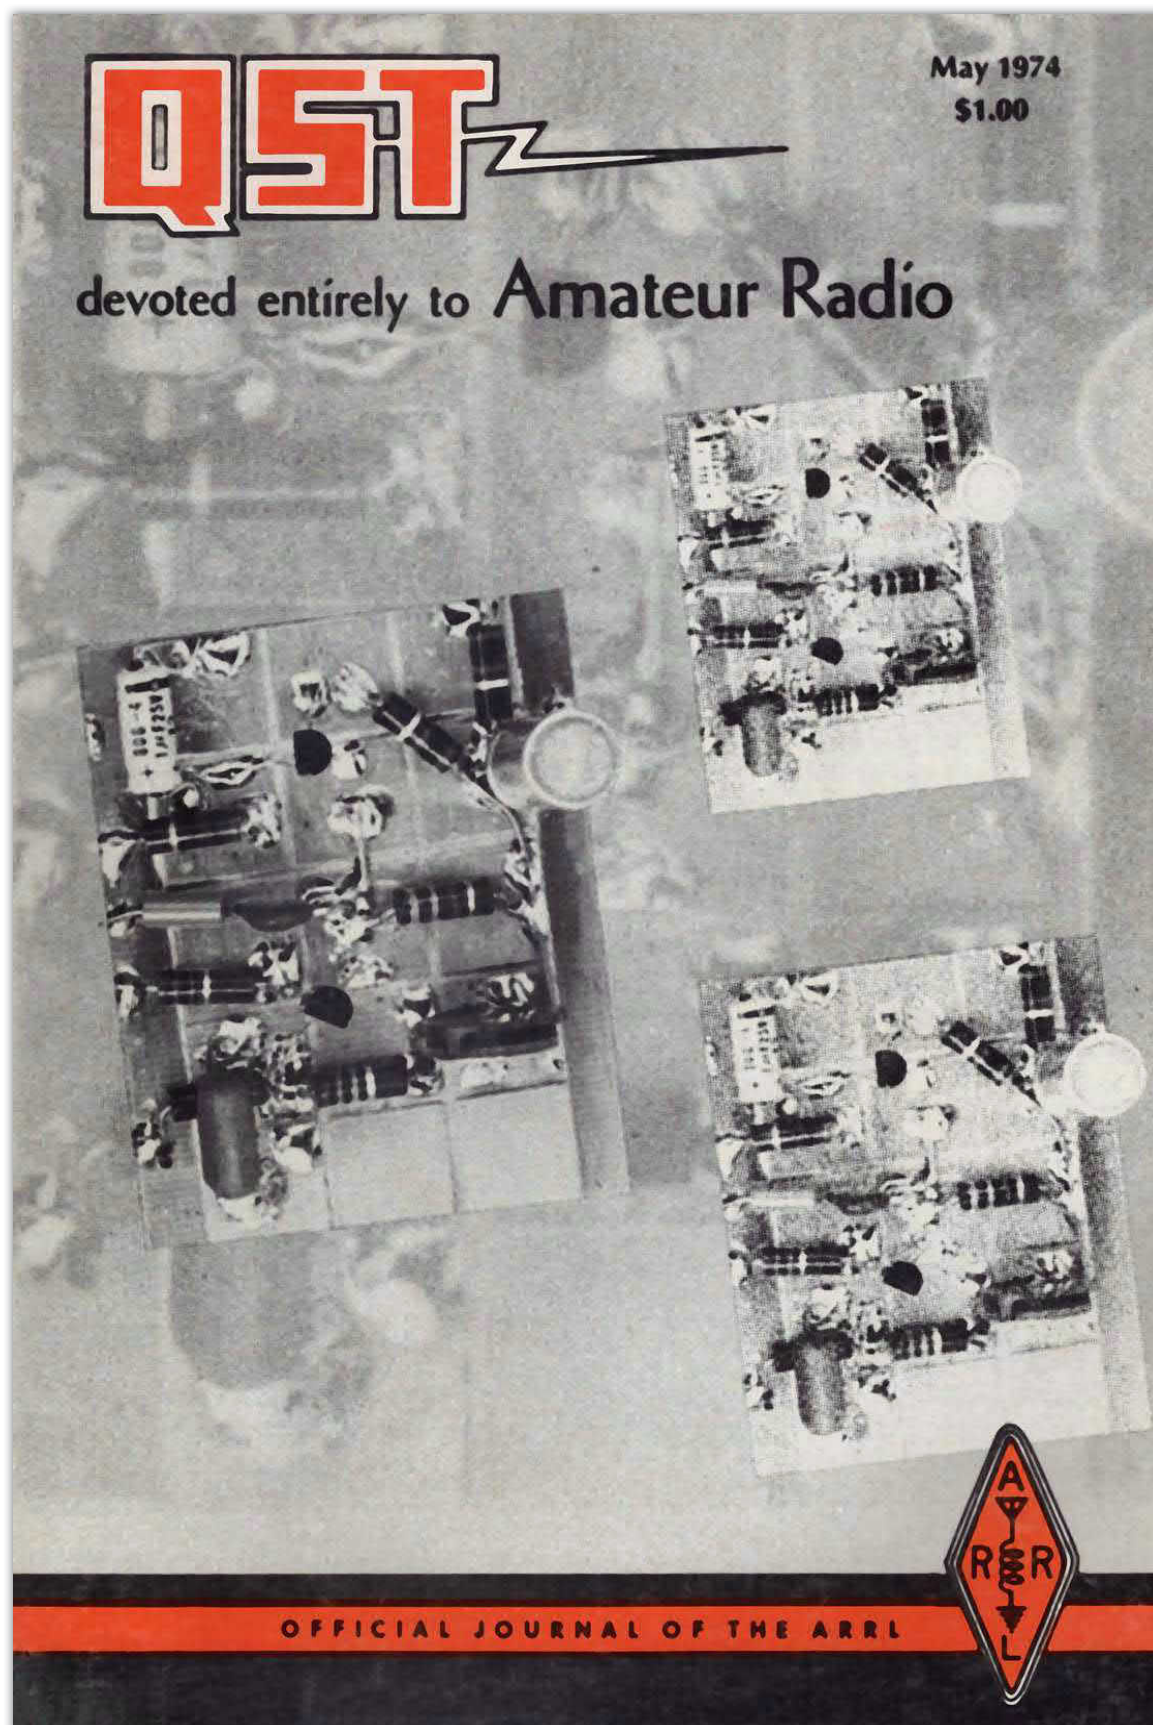

The popularity of Oscar 6 communications has caused many amateurs to turn their attention toward keeping track of where the satellite is and when they can use it. When two authors present workable and attractive ideas simultaneously, it provides an opportunity to present both to the readers. You can try either of the systems or both, for that matter



Instant! Oscar 6 Locator

BY JAMES E. MCKIM,* WØCY

THE INSTANT Oscar 6 locator is the lazy-man's solution to the problem of wanting to know where the satellite is at all times — now all I have to do is see which light-emitting diode is blinking. No more calculations or plotting, and the accuracy is such that a high-gain antenna can be pointed with precision. In addition, the locator is an excellent demonstration unit for showing the real-time motion of a satellite when talking to a science club or other interested group.


Some plotting methods do not take into account the motion of the earth during the pass, and consequently Oscar 6 is five degrees west of the plotted location at the end of the pass. This represents about 350 miles (563 km) at the equator or almost the east to west distance across the state of Kansas. The instant locator shows where Oscar 6 is to the closest minute of time in the Northern Hemisphere, and to the closest five minutes in the Southern Hemisphere. The pictures pretty well explain the project, which consists of three parts: the globe, a Plexiglas ring with LEDs mounted on the periphery, and a rotary switch to control the voltage to the LEDs.

* 1404 S. Tenth, Salina, KS 67401.


Top view of the 115-point rotary switch. An orbit counter is geared to the switch shaft through a one-to-one bevel gear assembly

Construction

The globe, which turned out to be made of glass (did you ever try to ream a hole in glass, thinking it was plastic?), is mounted on a double ball-bearing support and driven by a 1-rph clock motor through a 24-to-1 gear chain. A knob on top of the globe releases it for timing and for correction after a power failure. One of the new felt-tipped non-permanent marking pens was used to draw a 2500-mile (4,022 km) radius circle centered

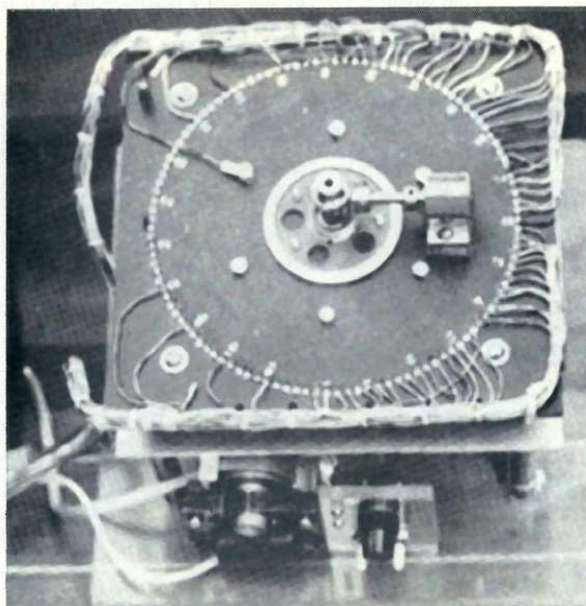


May 1974

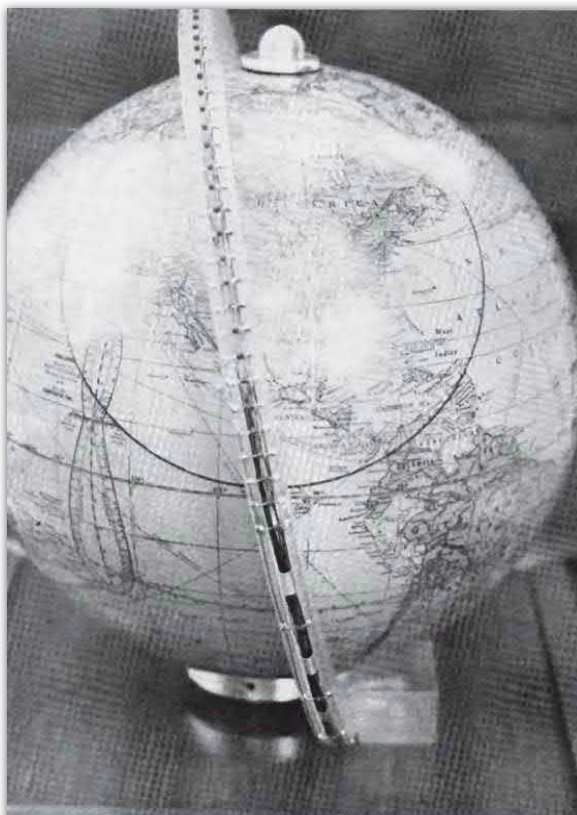

on Salina, Kansas. If the next Oscar should be at a different altitude, the non-permanent ink can be removed with soap and water.

The second part, the Plexiglas ring, is scaled so that the top represents an orbit 900 miles (1,448 km) above the globe, and supports the LEDs that mark Oscar's progress. In the Northern Hemisphere, an LED is mounted every minute of time, and in the Southern Hemisphere, every five minutes. At this location, about all you want to know is the approximate location in the Southern Hemisphere, and about how soon Oscar is going to cross the equator. One of the LEDs is always on, so it is no problem to spot where Oscar is at the moment. The ring is mounted at an angle of 102 degrees,

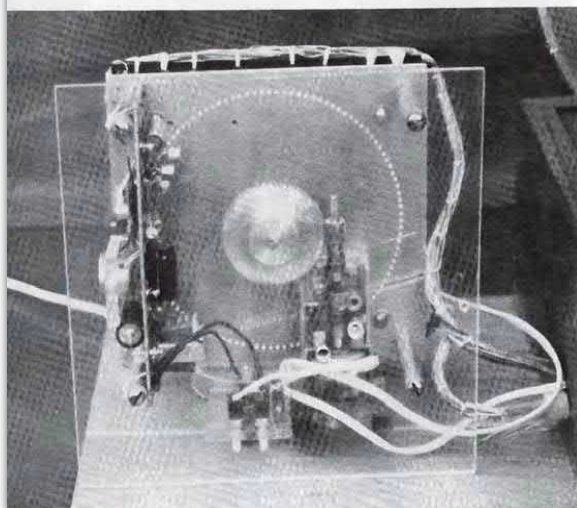

The Plexiglas ring has eyelets pressed into it to aid in making connections to the LEDs. The groove in the ring carries the wires from the LEDs to the base. A 2500-mile circle is shown centered on Salina, Kansas.

corresponding to the approximate inclination of the Oscar 6 orbit. Diffused-light type LEDs are used which easily can be seen from twenty feet in a well-lighted room. They only draw 10 mA, therefore No. 28 wire is adequate to connect them to a terminal board in the base. Small eyelets were pressed into the perimeter of the ring, making it easy to join the small leads on the LEDs to the wire. Removing a bad LED is no problem when this type of mounting is used – a couple of them did get overheated in soldering and had to be replaced.

The third section is a 115-point rotary switch which is driven by a 1-rpm clock motor turning a single worm gear and driving the 115-tooth main gear. Therefore, the switch arm makes one rotation every 115 minutes and lights the appropriate LED. The motor must be turned off for 16 seconds every 50 orbits to compensate for the 114.9946-minute actual orbit time. Toggle switches are provided for the rotary-switch motor as well as the power supply for the LEDs. Included in the power supply is a transistor flip-flop to cause the LED to blink twice per second with an 80-percent on time; it is a lot easier to spot a blink than a steady glow. The orbit-number counter is geared to the rotary-switch shaft with a one-to-one bevel gear. The Plexiglas cover over the switch and power-supply assembly helps people resist the urge to see if the shaft can be turned by hand. It should be possible to do all that the rotary switch does by using shift registers, then everything could be mounted in the globe base. I hope to have this worked out in time for Oscar 7 and it will be a lot easier to change for future satellites than rebuilding the rotary switch. A beeper is connected to the 114th-minute point on the switch to warn that an equatorial crossing is about to occur. At the time of this writing, only the evening passes of Oscar 6 are to be used, but the beeper can be connected through a diode to any of the points should other passes become active. It is nice to go on about your work and know that you will not be late for a pass. The unit has been in operation for a month now, and it is still exactly on schedule with the orbital information from W1AW.

QST

A clock motor and worm-gear arrangement drives the rotary switch. The pc board to the left contains the power-supply components and a "beeper" circuit.

QST for

A Tone BEEP Keyer for Repeaters

Obtain an Audible Indication
of Off-Frequency Operation

BY ART GENTRY,* W6MEP

THIS SIMPLE telemetry¹ circuit is the latest of a series of modifications to the WR6ABN repeater. Earlier uses of tones and tone bursts reminded users to allow time for breaking stations, and to indicate that the time-out timer had been reset. This latter indication was by means of transmitting two tones simultaneously.

The designers of the telemetry system decided to inhibit one of the two tones, selectively and allow either the high or low tone to indicate the position of the user's carrier in the receiver passband. Since installation of this feature, it has been an unqualified success.

The sensors were adjusted to trip the relays at 1 kHz above or below the center frequency; this appears to be a practical value for narrow-band receivers. Thus, the "on-channel" slot is 2-kHz wide, centered about the receiver input frequency.

This system makes use of such nonexotic equipment as relays to perform the switching. Those readers who are well versed in solid-state logic systems will find it easy to apply the principles to their favorite machine.

Technical Description

The 741 op amp is set for a dc gain of 1000. The ac gain of the circuit is very low, as set by the 1 μ F bypass capacitor across the 1-M Ω resistor in the feedback loop, and the 1 μ F across the 50-k Ω control in the input circuit. The output of the 741 feeds two transistors and a zero-center meter.

The steering diodes, CR1 and CR2, allow the op amp to drive Q1 or Q2 into conduction and to charge C1 or C2 to the value of the op-amp output voltage. R1 and R2 allow capacitors C1 and C2 to charge above the base voltage of the transistors and to cause them to conduct for about 5 seconds after the drive voltage from the op amp is removed. This delay acts as a memory so the delayed tone beep

* 7832 Jellicoe Ave., Northridge, CA 91324.

¹ "Telemetry. Measurement with the aid of intermediate means that permit the measurement to be interpreted at a distance from the primary detector." — *IEEE Standard Dictionary of Electrical and Electronics Terms*, 1972.

Some repeater users, in their haste to operate a newly acquired mobile rig, simply hook it to a power source and an antenna, then key up the local machine. If they get a response, they assume that all is well. The need to adjust the transmitter frequency does not attract their attention until they are in an area of poor coverage, or if some fellow user informs them that the audio "doesn't sound right." Now a problem appears. Frequency checking at vhf is beyond the capabilities of many amateur stations, and it may be weeks or months until the local club has a frequency-netting session. Here is a device that will help the communicators stay "in the groove." One word of caution: Extensive keying of the machine to "walk" the frequency in can be very annoying to the monitors and other users. It would be considerate to ask permission, or wait until a slack time to do your tweaking.

can indicate the frequency readout after the carrier of the user station goes off.

Note that the poor ac frequency response of the op-amp means that the input to it must remain for approximately 3 seconds in order for it to load C1 or C2 for the readout. This delay was intentional for two reasons: (1) to prevent noise or fluctuating signals from giving false readings, and (2) to prevent unscrupulous users from abusing the device by keying up several short bursts.

Note that the input to the op amp is shorted to ground when a carrier is not present. This prevents noise from loading up the sensor prior to a reading. It also allows the adjustment of the dc offset control, R5. The calibrate potentiometer, R6 is adjusted to a point where signals 1 kHz above or below the center frequency of the receiver will just trip relays K4 or K5 (Note that the receiver should be adjusted so that the discriminator voltage is zero with no signal.) This adjustment of R6 to ± 1 kHz determines the slot width. The center frequency is determined by the usual crystal-oscillator adjustments in the receiver.

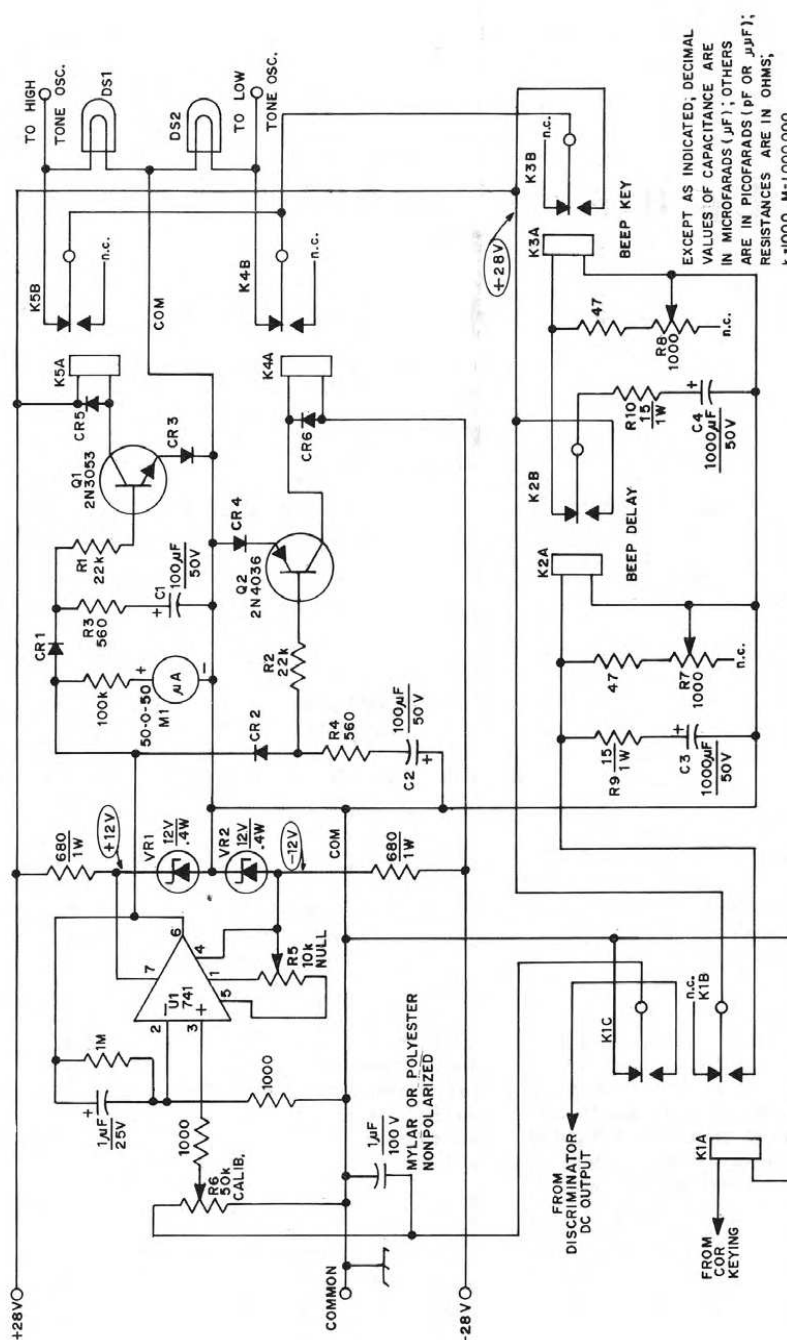


Fig. 1 — The schematic diagram of the tone-beep keyer. A dual 28-V supply is used in this system, but there should be no difficulty in revising values to make use of lower voltages. The charging current of C1 through C4 is limited to a safe value by means of the series resistor in each case. If the meter is omitted, tip jacks should be provided to aid in adjusting the circuit.
CR1-CR6, incl. — Silicon diodes, 1N2069 or equiv.
DS1 — 28-V — 28-V pilot lamps. Lower-voltage units or LEDs with

suitable dropping resistors may be used.
K1 — Dpdt relay. Coil voltage and current must be compatible with voltages available from receiver COR circuitry
K2-K5, incl. — Spdt relays, 450- to 700-ohm coil for 24 V dc. Allied Control T154-2C or equiv
U1 — Operational amplifier IC. Fairchild μ A741 (U587741312) Signetics μ A741T or μ A741CV Motorola MC1741G or MC1741P1 or equiv

K1 can be the normal COR or a separate relay keyed by the COR. This relay keys both the input to the op amp and the delay relay, K2. Because of the discharge time of C3, K2 will have a delayed release. When K2 releases, it keys K3 for a short period as determined by C4 and R8. The values needed for C3, C4, R7 and R8 will vary depending upon the characteristics of K2 and K3.

Operational Notes

1) K2 establishes length of delay between end of carrier and keying of tone beep.

2) K3 establishes length of tone beep.
3) K4 or K5 select the desired tone to be keyed.

4) Adjust R5, NULL control, for zero dc volts at the output of the 741 with K1 deenergized.

5) The trip point of K4 or K5 is adjusted by means of R6, the CALIBRATE control. It should be adjusted while monitoring a carrier set to the desired frequency offset value.

Decoding of the telemetry is by means of widely available equipment. the user's ears. **QST**



Certificate of Code Proficiency Recipients

Sponsored by



www.i2rtf.com

This month, ARRL recognizes merit and progress in Morse code proficiency on the part of the following individuals, who have achieved proficiency at the following rates, in words per minute.

September 2023

Ralph E. Duncan, N7WWY	10
David G. Gower, W7JMG	10
Nathan T. Lyons, N8HWV	10
Ryan B. Massey, WB6EQK	10
Thomas F. Wentworth, W8LA	10
Christopher J. Brown, NY9X	15
Erich C. Fitschen, KQ4BBC	15
William G. Homsany, KG6COH	15
Nathan T. Lyons, N8HWV	15
Bruce Garrett, AC4CW	20
Joseph W. Chapman, NV1W	25
Ron Kinney, KC0ZPS	25
Dain Webster, K7SXN	25
Michael J. Kerezsi, W3ASW	40

October 2023

Joseph P. Kononchik, KS11	20
---------------------------	----

November 2023

Eric D. Benjaminson, WA9CEK	10
Paul K. Earhart, WD4OQH	10
Paul K. Earhart, WD4OQH	15
Alfred F. Hanzl, K2AL	15
Jerry W. Kerns, K6FN	15
Jerry W. Kerns, K6FN	20
John P. King, KA2F	20
David A. Rose, N8GZ	20
Robert D. Spearman, N5VUC	20
James C. Stekas, K2UI	20
Jerry W. Kerns, K6FN	25
John P. King, KA2F	25
Scott T. McNutt, N3ADP	25
Donald W. Brown, W0AF	30

December 2023

Matthew K. Jamison, KI5PGL	10
Andrew C. Kirk, WB2C	10
Richard F. Phillips, AE0QH	10
Erica W. Zavaleta, W7WXR	10
Russell L. Bast, Jr., AD2BO	20
James W. Carter, K7IOL	20
Alfred F. Hanzl, K2AL	20

January 2024

Charles W. Campbell, K0CWC	15
Douglas B. Diegert, N2KGT	15
George Wayne Moore, W8SUN	20

February 2024

Albert J. Whetter, W9WJ	20
-------------------------	----

Congratulations to all of the recipients.

April 2024 W1AW Qualifying Runs

W1AW, the Hiram Percy Maxim Memorial Station at ARRL Headquarters in Newington, Connecticut, transmits Morse code Qualifying Runs to assist ham radio operators in increasing and perfecting their proficiency in Morse code. Amateur radio operators can earn a Certificate of Code Proficiency or endorsements by listening to W1AW Qualifying Runs.

April Qualifying Runs will be transmitted by W1AW in Newington, Connecticut, at the times shown on 1.8025, 3.5815, 7.0475, 14.0475, 18.0975, 21.0675, 28.0675, 50.350, and 147.555 MHz. The West Coast Qualifying Runs will be transmitted by KH6TU on Wednesday, April 24, at 6 PM HST (0400 UTC on April 25) on 7047.5 and 14047.5 kHz. Unless indicated otherwise, sending speeds are from 40 to 10 WPM.

Amateur radio operators who participate in Qualifying Runs may submit proof of 1 minute of the highest speed they have copied in the hope of qualifying for the Certificate of Code Proficiency, or an endorsement to their existing certificate. Legibly copy at least 1 minute of text by hand, and mail the sheet to: W1AW Qualifying Runs, 225 Main St., Newington, CT USA 06111. Include \$10 (check or money order) if this is a submission for your initial Code Proficiency certificate; \$7.50 if you are applying for an endorsement (available for speeds up to 40 WPM). Your test will be checked against the actual transmissions to determine if you have qualified.

Members of the North Fulton (Georgia) Amateur Radio League (<https://nfarl.org>) are offering to subsidize the total cost of a Code Proficiency certificate or endorsement submission for any individual age 21 years and younger, and who reside in either the US or Canada.

Participants who wish to make use of this offer should indicate on their Qualifying Run submissions they are age 21 or younger, and certify as such via their signature. Eligible participants are not required to send any fee with their Code Proficiency submissions.

For more information about Qualifying Runs, please visit www.arrl.org/qualifying-run-schedule.

For information about how to qualify for the Certificate of Code Proficiency, please visit www.arrl.org/code-proficiency-certificate.



W1AW Qualifying Runs — April 2024

(All times are in Eastern Daylight Time.)

Monday	Tuesday	Wednesday	Thursday	Friday
	4/2 7 PM – 2300Z 35 – 10 WPM	4/3 4 PM – 2000Z 10 – 35 WPM	4/4 10 PM – 0200Z (4/5 – UTC) 10 – 40 WPM	
	4/9 10 PM – 0200Z (4/10 – UTC) 10 – 35 WPM	4/10 7 PM – 2300Z 10 – 40 WPM		4/12 9 AM – 1300Z 35 – 10 WPM
	4/16 9 AM – 1300Z 10 – 35 WPM	4/17 10 PM – 0200Z (4/18 – UTC) 35 – 10 WPM	4/18 7 PM – 2300Z 10 – 35 WPM	4/19 4 PM – 2000Z 10 – 40 WPM
4/22 10 PM – 0200Z (4/23 – UTC) 10 – 40 WPM			4/25 7 PM – 2300Z 10 – 35 WPM	4/26 4 PM – 2000Z 35 – 10 WPM

Celebrating Our Legacy

Interest Sparked by Books

◆ A novel inspired my ham radio journey and career in electronics. In 1962, when I was in fifth grade, I read *SOS at Midnight* by Walker A. Tompkins. It was an exciting adventure of Tommy Rockford, K6ATX, and his teenage ham friends battling the Purple Shirt Mob. This piqued my interest in ham radio, but unfortunately, I didn't know anyone who was a ham.

My father was a railroad telegrapher, and he gave me his 1939 Morse code practice set. I subscribed to electronic magazines, learned Morse code, and purchased ARRL's ham radio books for beginners. I was determined to get a license. My father remembered that his high school classmate, Robert Gumm, then W9RG (SK), had his license. We contacted him, he graciously gave me the Novice test, and in February 1968, I received my call sign, WN9WYI. In August, I passed the General license test. I received my Advanced call sign in 1970 while studying electronics in Michigan, where I became active in the Michigan Post Office Net. I also got my father into ham radio, and he became N9JNZ (SK).

I served in the Navy for 6 years and was able to operate as K3ORS. After my time in the military, I worked in the medical electronics industry for 40 years. I received my Extra-class license and First Class Radiotelephone Operator Certificate in 1979. Lately, I have remained active on FT8, and I am a member of two clubs. Looking back, it is remarkable that it all started because of a work of fiction.

Neal Degner, WA9WYI
Germantown, Wisconsin
Life Member

◆ I became interested in ham radio after reading *The Boy Electrician* by Alfred P. Morgan when I was seven. I joined the science club at my grammar school, where several members were hams. I used code training records to



Randall Burg, WB6JLA, at his station in Marina del Rey in Los Angeles County, California. [Randall Burg, WB6JLA, photo]

learn Morse code, and listened to them repeatedly.

One day after I was licensed, I was sending CQ DX on 20 meters, and a station whose call sign I'd never heard answered. I quickly looked up the call sign, and I almost fell off my chair! It was Pitcairn Island, one of the most remote locations on Earth. I had the contact of a lifetime!

I had always been interested in technology and had careers designing automated machine tools and selling mainframe computers, CAD/CAM systems, and printers. Years later, I retired to build a yacht broker business and an extensive ham station in my California office that could communicate with and assist yachtsmen cruising the Pacific Ocean. Cruisers first used phone patches and PACTOR, as satellite phones were too expensive and cell service was not available yet. I outfitted the station with a fair amount of restored classic equipment that, as a young ham, I had always wanted to own. Outside of my office, I installed a crank-up tower with a three-element Mosley triband beam.

I've since relocated my business to Florida and equipped my office with a FlexRadio FLEX-5000A transceiver, a Henry Radio 1KD-5 linear amplifier, and a Dentron DTR-3KA antenna

tuner. My backup radio is my much-loved Icom IC-756 Pro II. I'm still into CW, rarely use SSB, and enjoy ham radio.

Randall Burg, WB6JLA
Fort Lauderdale, Florida

Keeping the Family Together

In the early 1980s, my late father-in-law, Ralph Everett Ables, Jr., wanted to maintain contact with his brother, Reverend Ed Ables, and his family, who had received their appointment to serve in Ecuador as Southern Baptist missionaries.

Mr. Ables began the journey of earning his ham license and taught himself Morse code. My wife, Katherine, said he spent many hours sharpening his Morse code skills to ace the test, and was licensed, becoming KA4BSQ. She also told me that her dad loved technology and was passionate about ham radio and the responsibilities that came with it. He kept detailed logs and was an ARRL member.

Mr. Ables talked with folks from Texas to the South Seas. He chatted with people in Australia, the Dominican Republic, Haiti, Lima, Peru, New York, and Colorado. Of course, his brother Ed made many ham friends all over the world, too, and enjoyed many conversations on a wide variety of subjects all the way from Ecuador, Buenos Aires, and Argentina.

Johnny Brewer
Albertville, Alabama

Send reminiscences of your early days in radio to celebrate@arrrl.org. Submissions selected for publication will be edited for space and clarity. Material published in "Celebrating Our Legacy" may also appear in other ARRL media. The publishers of QST assume no responsibility for statements made in this column.

Classic Radio

A New Life for Old Iron

Country music, local news, and the feeling of a close-knit community beamed out from KPGE, a small AM station beloved by its devoted listeners in Page, Arizona. It was 1995, and the station's kilowatt transmitter, a Gates BC-1T (which had been in service for 24 years), signed off for the last time and would be replaced with a new transmitter.

At about the same time, Grant Bagley, W3GB, headed west in his pickup truck to help Rich Briggs, WA7MTF (SK), a KPGE employee, move his home and shack across the country to Maryland. The two had been friends since the 1980s, and this trip would reunite them and, unexpectedly, add a very large item to the move.

Two Paths Converge

During Grant's visit with Rich, he learned that Dan Brown, N7DB, the owner of KPGE, wanted his BC-1T to go to a good home and not to the scrapyard. Arrangements were made to load the massive transmitter onto Grant's truck, along with all of Rich's gear.

"I envisioned putting the Gates on the air as AM 160 and/or 80," recalled Grant. "[It] arrived at my QTH in Baltimore, where I kept it until 2011, [when] I moved into a retirement community with no ham radio. [The] Gates was moved around several times during my time storing it. It seemed to gain weight each time it was moved," he added. Reluctantly, it was decided that the BC-1T had to go. It would be donated to the National Capital Radio & Television Museum in Bowie, Maryland.

"The story of the Gates is interesting and is a good example of how ham radio and the relationships we develop can become so much of our lives," Grant said fondly.

According to National Capital Radio & Television Museum Curator Brian Belanger, KB3PRS, they didn't have a good place to exhibit the transmitter, so they contacted other museums. The Vintage Radio and Communications Museum of Connecticut (VRCMCT) agreed to take ownership of it, and ARRL would take possession. ARRL would also make the transmitter functional on the amateur bands, with the stipulation that modifications would be kept to a minimum. On March 24, 2017, the

"The story of the Gates is interesting and is a good example of how ham radio and the relationships we develop can become so much of our lives."

BC-1T was transported in a rental van from Maryland to its new home at the ARRL Laboratory in Newington, Connecticut.

The transmitter needed a thorough cleaning and inspection, as it had been in storage for a number of years. Dan Thomas, NC1J, who had extensive broadcast engineering experience, headed up the team from the museum, which included Larry Butler, KB1KIZ; Dan Crowley, AB1XL, and Bill Storey, AB1LZ. ARRL arranged for the installation of a dedicated electrical panel in the Lab for the transmitter. This allowed the VRCMCT crew to restore the BC-1T to being fully operational on 1340 kc.

News of the conversion spread quickly through the ham community, resulting in an outpouring of support —



Tim "Timtron" Smith, WA1HLR, used his AM radio expertise to convert the BC-1T transmitter from broadcast to the ham bands.

most notably from Billy Yates, N6YW, who donated four 833 vacuum tubes used in the modulator and final power amplifier sections, and Dennis Gilliam, W7TFO, who donated the RF ammeter, which was missing from the transmitter.

From MF to HF

Tim “Timtron” Smith, WA1HLR, an AM mainstay with a rich and colorful history in amateur radio, worked on the transmitter’s conversion from broadcast to ham bands. Tim was well known for offering detailed instructions for improving the audio and performance of a vast range of transmitters. For those on frequency, it was an authoritative schooling rooted in amateur and professional radio, as Tim had engineered broadcast stations on AM, FM, and shortwave throughout his expansive career.

The project was directed by then-ARRL Assistant Lab Manager Bob Allison, WB1GCM, who arranged for Tim to receive an official ARRL Lab coat with his name and call sign on it. His first challenge was getting the oscillator to function on 160 and 80 meters. From there, the driver stage was converted, followed by the output matching circuit. A number of design features, which were satisfactory for broadcast band operation, required changes for operating on the higher frequencies. No more lengthy RF leads connecting tuned circuits or bypass caps!

Trial Operation

The Gates BC-1T was making power on 160 and 80 meters, and for the four 833 tubes that had been used to provide a fully modulated kilowatt carrier 24/7, amateur use would be a cushy retirement. For the time being, the transmitter would be left on 3885 kc, crystal-controlled.

The first on-air test was made on February 22, 2018, from the ARRL Lab using a dipole designed for this transmitter. Despite being unannounced, a surprising number of operators discovered the test transmissions and joined in the celebration of the day. Some audio tweaks were made, but for the most part, the Gates BC-1T sounded loud and proud in its new home.

Current Status

In 2022, the VRCMCT took possession of the transmitter and moved it to the museum, where it’s on display and occasionally on the air as W1VCM, operated by the museum’s amateur radio club. The transmitter is also used during AM operating events, such as the AM Rally



Tim “Timtron” Smith, WA1HLR, dug into the innards of the broadcast transmitter to convert it to operation on 160 and 75 meters. Click here to access an audio recording of the BC-1T’s first transmission on AM.

(www.amrally.com), the Electric Radio Heavy Metal Rally (<https://forums.qrz.com/index.php?threads/34th-electric-radio-heavy-metal-rally.892062>), and Antique Wireless Association on-air events (www.antiquewireless.org/homepage/operating-events).

The successful conversion of the transmitter greatly expanded ARRL’s capabilities on the 160- and 80-meter bands, particularly for special AM operating events. The rest of the time that the transmitter was at ARRL, Bob operated as W1INF, the ARRL Laboratory Operators Club call sign, on the weekends, as ARRL staff is not permitted to operate while working.

The mission to get the BC-1T operational on the amateur bands was accomplished. Tim visited ARRL again to install the antenna changeover relay, and now that the transmitter has moved, he’ll eventually visit the museum to make additional modifications.

Watch “WA1HLR Converts A Gates BC1T To 160 And 80 At The ARRL” (www.youtube.com/watch?v=cqM-nbiMBOE) for in-depth information about the transmitter’s conversion, and Ham Nation episode 391 (www.youtube.com/watch?v=67VfEdfRTkw) to hear Bob explain the project. For technical data on the conversion, visit <https://forums.qrz.com/index.php?posts/4569753>.

100, 50, and 25 Years Ago

April 1924



- The cover shows a ham in wintertime looking up at his antenna pole and holding the broken ends of the rope that had been supporting the three-wire “hundred-footer.”
- “Editorials: The April Elections” and “B.C.L. Amateurs” remind members of their upcoming opportunity to choose representation for their division, and discuss broadcast listeners, pointing out that many may be brought into amateur radio because of their technical interests.
- A tuned radio frequency amplifier that does not oscillate under ordinary conditions of broadcast reception is presented in “Something New in Radio Frequency Amplifiers” by M.B. Sleeper.
- A useful way of manufacturing 3-phase supply from ordinary house current is shown in “Phase Multipliers and Mercury Arc Rectifiers” by S.P. Sweeney, 5KM.
- F.D. Fallain, 8ZH-8AND, tells the origin and early history behind ROWH in “The Story of the Royal Order of the Wouff Hong.”
- A simple, inexpensive method of measuring plate dissipation, tube output power, and antenna resistance is described in “Seeing What Your Tubes Are Doing” by H.J. Nolte.
- In “The Amateur Builder,” H.F. Mason, 1ID, explains how to “Build Your Own Battery Charger.”

April 1974

- The cover shows an artist’s conception of the Amsat-Oscar 7 satellite.
- “It Seems to Us...Trends and Basics” discusses some concerns in a current, independent survey of amateur characteristics, and reports that, going forward, the Beginner and Novice section will be more structured, combining “book learning” with simple lab projects.
- A simple-to-build, 2304-MHz balanced mixer that requires no tuning is described in “A Simple and Efficient Mixer for 2304 MHz” by Leroy May, W5AJG/W5HN, and Ben Lowe, K4VOW/WA5UVM.
- Part 1 of a course in fundamental theory and application of semiconductor devices for the newcomer appears in “Learning to Work with Semiconductors” by Doug De Maw, W1CER, and Lew McCoy, W1ICP.
- A space-saving vertical for 160 meters is described in “Hints and Kinks: A Backyard 160-Meter Vertical” by Mike Mussler, WB8JJA.
- A brief history of the Worked All Continents (WAC) award is shared in “A Glean In Your Grandfathers’ Eyes” by Hank Brown, W6HB.
- A photo of Bob Miner, Jr., VE3JN, who placed first in the Intermediate Engineering division of the 12th Canada Wide Science Fair with his Mars Landing Vehicle, appears in “Strays.” The transmitter used is W1CER’s 2-meter fm Pip-Squeak (featured in the March 1971 issue of QST).

April 1999

- King Hussein bin Talal, JY1, appears on the cover. His passing leaves an enduring legacy as one of the most active supporters of amateur radio on the international stage. A farewell to JY1 appears in “The Passage of a King” by Rick Lindquist, N1RL.
- Gratitude shown to our Official Observers (OOs), the *Amateur Auxiliary to the FCC*, for their role in the FCC’s new enforcement actions is in “It Seems to Us...Pleased with More FCC Enforcement? Thank an OO!” by Rick Palm, K1CE.
- Start building your projects with surface-mount devices. Sam Ulbing, N4UAU, shows how in “Surface Mount Technology — You Can Work with It!, Part 1.”
- “I’ll see you in Hell.” Steve Meltz, N2QLQ, summarizes “The ‘New’ HF Digital Modes.”
- “One man’s trash is truly another man’s treasure.” Jay Craswell, W0VNE, describes fixing radio equipment with a few tools and a keen sense of smell in “DIY Ham Radio Repair.”
- Diane P. Ortiz, K2DO, explains how and why she infiltrated a Yankee Clipper Contest Club (YCCC) meeting in “YL News: A YL at the YCCC.”

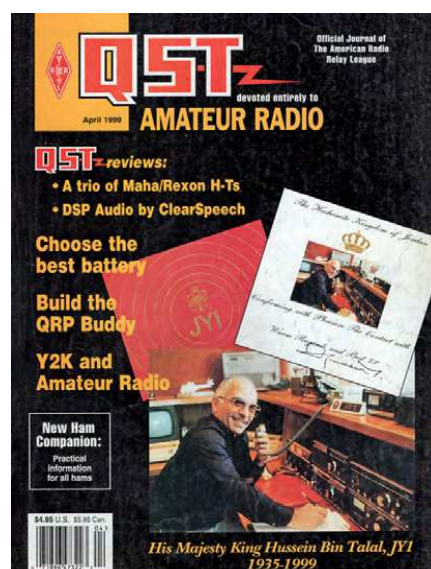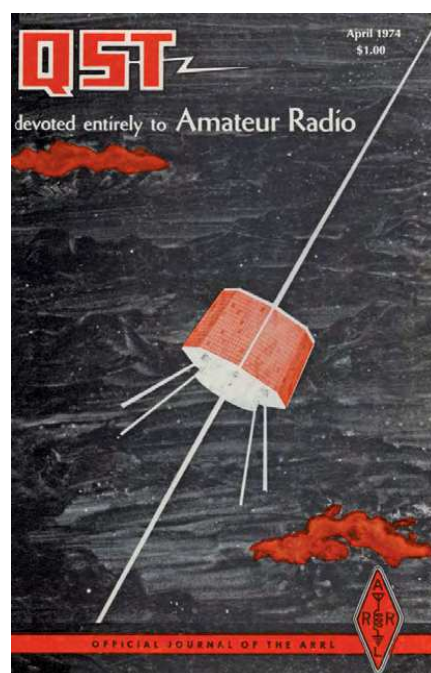

Silent Keys

It is with deep regret that we record the passing of these radio amateurs:

vN1ARY Engstrom, Martin D., Jr., Fryeburg, ME
W1AUZ Trudell, Richard E., Hingham, MA
vWA1DGU Gaylor, Richard W., Sr., Brookfield, CT
•K1FIR Little, Paul A., Port St. Lucie, FL
♦WE1H Atwood, Matthew T., Merrimack, NH
KA1OJR Goodland, Elizabeth A., Woburn, MA
vKA1OJS Goodland, John L., Woburn, MA
vK1PTI Carbone, J. Peter, Jr., Canton, CT
N1TM Magera, Thomas E., East Hartford, CT
vKA1UUX Cassidy, George A., Stonington, CT
vK1VDE Guerin, Gilbert E., Essex, MA
KE2BV Kingsley, Richard A., Penn Yan, NY
KG2FN Spaeth, Peter G., Aquebogue, NY
vW2NZH Mack, Arthur E., Ellenton, FL
vKC2ROJ Meeker, Richard B., Brick, NJ
AC2T Maytan, Paul, Yonkers, NY
vKC2TRX O'Connell, Daniel, New York, NY
K2TWL Parish, Howard I., West Windsor, NJ
KC2YMI Donovan, James S., Stormville, NY
v♦N3AOG Comly, Richard E., Hatboro, PA
vKB3AP Hofkin, Gerald A., Owings Mills, MD
vAF3D Andersen, Robert G., Glen Burnie, MD
N3EMQ Bradley, William J., Media, PA
N3JOY Long, Robert C., Annville, PA
N3NZ Zeibari, Noel, Swarthmore, PA
N3P Oksala, Stephen Paul, Exton, PA
♦K3SEW Klock, Ronald R., Northumberland, PA
vW3YZ Kensinger, Philip R., Acworth, GA
WJ3Z Nardone, George J., Manchester, MD
W4AMS Sims, Angus M., Jr., Canal Point, FL
N4AOC Hoover, Henry M., Franklin, TN
♦W4BZL Ragland, Joe R., Jr., Raleigh, NC
v♦W4CT Booth, Benjamin S., Mentone, AL
N4FAN Bridges, Chris, Shelby, NC
W4GSP West, Victor H., Gainesville, GA
N4HIX Winter, Melanie W., Huntsville, AL
KK4IAJ Smith, William Eugene, Jr., Rome, GA
WA4IOR Russell, Alvin F., Hendersonville, NC
KM4JRH Kilmer, Mark A., Raleigh, NC
KI4JWZ Pierpoint, Sarah O., Spring Hope, NC
N4KAJ Karden, Chana, Fort Lauderdale, FL
N4LH Latta, William I., Jr., Louisville, KY
vK4LOF Huffingham, Irving D., Jacksonville, FL
WB4LQS Lemmons, Gordon C., Gastonia, NC
vKJ4MDY Eggimann, Peter, Wendell, NC
vW4NGS Hancock, Arnold L., Mayodan, NC
KA4OBK Meacham, Grace A., Memphis, TN
•KY4P Lewis, Charles L., West Jefferson, NC
N4PNI Grant, Franklin D., Woburn, GA
vK4QYK Castle, Roger, Greenup, KY
WA4RD Ward, Stanley D., Leicester, NC
KI4SLW Koehler, Bradley M., Kennewick, WA
vW4STS Sacco, Steven Thomas, Whitsett, NC
v•KB4UBF Klemm, Richard R., Enterprise, AL
KW4UD Worland, Linda S., Kernersville, NC

v♦W4XT Schlenker, Clayton N., Louisville, KY
N5ATV Daze, Richard E., Houston, TX
♦K5FA Abide, Fred W., Jr., Leland, MS
vAB5FG Ream, Douglas M., Alamogordo, NM
vKC5FSC King, Gaylon, San Antonio, TX
K5GSM De Hart, Bryan N., Choctaw, OK
KV5I Hatcher, Eddie L., Mesquite, TX
K5JGU Bearce, Duane G., Houston, TX
W5JYB Badeaux, John J., Waskom, TX
♦K5LAD Pickett, Jim C., Owasso, OK
vKF5OVT Davis, Ronald, Jr., Rayville, LA
v•KF5OZS Staples, Robert D., Norman, OK
KF5PAL Walker, Brett, New Iberia, LA
•KB5SBG Wilke, Jeffrey L., Van Buren, AR
WB5UKU Fremin, George P., Jr., Austin, TX
WB5ULK Skaggs, Gary A., Laguna Vista, TX
N5XPI Pinkston, Bobby W., Colorado Springs, CO
vK5YKD Wolf, Earnest G., Oklahoma City, OK
♦K6AW Merchant, Stephen F., Goleta, CA
WB6BDN White, Paul H., Los Angeles, CA
KB6DMZ Pearson, Alan J., Rio Vista, CA
KG6DQG Horsley, Donald A., Emerald Hills, CA
N6IMV Malo, John A., San Diego, CA
♦K6KO Anderson, Kay O., Pine Grove, CA
K6MR Beals, Kenneth A., Anderson, CA
vK6QYN Corby, Joseph P., Hughson, CA
KM6RNW Harmon, Dean L., Redding, CA
♦K6SI Lamson, Kenneth C., Las Vegas, NV
♦K6TA Anderson, Kenneth O., Pine Grove, CA
•KJ6VI Collins, John T., Dublin, CA
vW6YLD Wahl, Philip E., Santa Maria, CA
vWA6ZHE Spaulding, Norman E., San Jose, CA
vKE7AOA Berney, Richard V., Milwaukie, OR
v♦N7AS Armstrong, Grant C., Prescott Valley, AZ
K7DRH Huycke, Ann, Boise, ID
vK7EKG Hull, Robert E., Missoula, MT
KB7GYU Tipton, Christopher P., Klamath Falls, OR
vAC7JH Dickey, Steven L., Nampa, ID
vK7JYN Baker, Craig R., Walla Walla, WA
KG7LQP Hastings, Douglas G., Garden Valley, ID
KR7R Vincent, Richard D., Seattle, WA
♦W7RIL McLean, Riley, Eugene, OR
KF7SHR Bersos, Robert K., Mercer Island, WA
vKB7UBF Harris, Ralph W., Port Orchard, WA
•KD7VXW Houser, William G., Brigham City, UT
vN7VZW Manning, Bradford E., Yakima, WA
•N8BFI Hazelton, Marilyn J., Lawton, MI
vWA8BIJ Cuker, Vincent L., Chelsea, MI
W8CXZ Swanson, John E., Jr., Northville, MI
W8DRS Sprude, Donald R., Brookville, OH
N8ETP Kopcak, Thomas A., Westlake, OH
vW8GCW Rich, Charles E., Holland, MI
♦•N8JC Cook, Jerry, New Martinsville, WV
vWD8JHL Staffey, Don R., Stearns, KY
N8JIW Howard, Don, Shaker Heights, OH

v♦KN8KAZ Sanders, Franklin S., Jr., Buda, TX
W8KBA Hassler, Craig R., Columbus, OH
vWB8MLP Carter, Roy B., Hinton, WV
vK8NYL Andrews, John W., Sr., Akron, OH
W8OU John, Andrew C., Edmond, OK
vKD8RMU Foor, Thomas E., Kalamazoo, MI
K8VEN Kolenich, Jerome J., Solon, OH
K8WRF Faulkner, William R., Winfield, WV
WQ9A Spellman, William B., Waukesha, WI
WB9AKG Stockton, James D., Bloomington, IN
vKB9AO Laska, Gerald W., Wausau, WI
vN9AQF Gardner, Earl A., Greenwood, IN
vWD9CKO Denick, Gene A., Tucson, AZ
v♦WB9EBO Swetsky, Gerald P., Milton, FL
K9HJL Enigl, John R., Sr., Sturgeon Bay, WI
♦W9IM Raffel, Leslie J., Mettawa, IL
•WB9MFB Shimek, Ron, Manitowoc, WI
•N9QQE Blaser, Karen M., Sycamore, IL
KD9SEZ Enter, Steven H., Fredonia, WI
•N9UNR Barrow, David W., III, Cedarburg, WI
W9VA Smith, William B., Riverwoods, IL
vK9VCN Treleven, Robert E., Oneida, WI
N9VLY Rundell, Merton R., III, Westfield, IN
vWA0ACX Brown, Stephen R., Minneapolis, MN
AD0BC Thieman, Jerry L., Houston, MO
vW0BLE Pierson, Gerald V., Jr., Des Moines, IA
N0DJS Schneider, Gerald F., Mission, TX
W0DZX Atkins, David R., Higginsville, MO
vN0FNF Collins, Joseph T., St. Louis, MO
vWD0GTM Monkman, Dennis E., Salol, MN
vW0HKD Bard, Gene C., St. Paul, MN
N0IGZ Gilliland, Frank, Oswego, KS
v•K0JFI Schwartz, Jay, Lake St. Louis, MO
W0ORH Rosenthal, Randall, Clayton, MO
vN0OUW Schmidt, Gerald D., Longmont, CO
KE0OYW Duncan, Billie G., Jr., Warrensburg, MO
•K0PAL Strobel, John D., Great Bend, KS
KE0QXD Nelson, Patricia, Minneapolis, MN
W0RCT Taggart, Ross C., Overland Park, KS
•K0UWK Botsford, George W., Ainsworth, NE
WB0YNA Wallace, Eugene L., Bradgate, IA
♦VE1BC Roscoe, Spurgeon G., Halifax, NS, Canada

- ♦ Life Member, ARRL
- ♦ Current Diamond Club
- v Veteran
- Former call sign

For information on how to list a Silent Key in QST, please visit www.arrl.org/silent-key-submission-guidelines.

Note: Silent Key reports must confirm the death by one of the following means: a copy of a newspaper obituary notice, a copy of the death certificate, or a letter from the family lawyer or the executor. Please be sure to include the amateur's name, address, and call sign. Allow several months for the listing to appear in this column.

HAM RADIO OUTLET®

WWW.HAMRADIO.COM

Family owned and operated since 1971



IC-9700 | All Mode Tri-Band Transceiver

- VHF/UHF/1.2GHz • Direct Sampling Now Enters the VHF/UHF Arena • 4.3" Touch Screen Color TFT LCD • Real-Time, High-Speed Spectrum Scope & Waterfall Display • Smooth Satellite Operation



IC-905 | VHF/UHF/SHF All Mode Portable

- GPS-Controlled Oscillator for Ultimate Frequency Stability • Separate Controller & RF Unit Configuration • Industry First 144 MHz to Microwave Transceiver • Wideband 50 MHz Span Real-time Spectrum Scope • Full D-STAR Functions



IC-V3500 | 144MHz FM Mobile

- 65W of Power for Long Range Communications • 4.5 Watts Loud & Clear Audio • Modern White Display & Simple Operation • Weather Channel Receive & Alert Function



IC-7851 | HF/50MHz Transceiver

- 1.2kHz "Optimum" roofing filter • New local oscillator design • Improved phase noise • Improved spectrum scope • Dual scope function • Enhanced mouse operation for spectrum scope



IC-705 | HF/50/144/430 MHz All Mode Transceiver

- RF Direct Sampling • Real-Time Spectrum Scope and Waterfall Display • Large Color Touch Screen • Supports QRP/QRPP • Bluetooth® and Wireless LAN Built-in



ID-50A | VHF/UHF D-STAR Portable

- High Visible LCD with Backlight Function • Find Nearby Repeaters with the Built-in GPS • Easy D-STAR Settings for Beginners • Voice Recorder Function • Share Pictures in DV Mode



IC-7300 | HF/50MHz Transceiver

- RF Direct Sampling System • New "IP+" Function • Class Leading RMDR and Phase Noise Characteristics • 15 Discrete Band-Pass Filters • Built-In Automatic Antenna Tuner



IC-7100 | All Mode Transceiver

- HF/50/144/430/440 MHz Multi-band, Multi-mode, IF DSP • D-STAR DV Mode (Digital Voice + Data) • Intuitive Touch Screen Interface • Built-in RTTY Functions



IC-7610 | HF/50 MHz All Mode Transceiver

- Large 7-inch color display with high resolution real-time spectrum scope and waterfall • Independent direct sampling receivers capable of receiving two bands/two modes simultaneously

IC-V86 | VHF 7W HT

- 7W Output Power Plus New Antenna Provides 1.5 Times More Coverage • More Audio, 1500 mW Audio Output • IP54 & MIL-STD 810G-Rugged Design Against Dust & Water • 19 Hours of Long Lasting Battery Life • 200 Memory Channels, 1 Call Channel & 6 Scan Edges



IC-2730A | VHF/UHF Dual Band Transceiver

- VHF/VHF, UHF/UHF simultaneous receive • 50 watts of output on VHF and UHF • Optional VS-3 Bluetooth® headset • Easy-to-See large white backlight LCD • Controller attachment to the main Unit



IC-T10 | Rugged 144/430 MHz Dual Band

- Disaster Ready - Excellent Fit for Your Emergency Bag • Loud Audio - New Speaker Design • Long Battery Life - Up to 11 Hours • FM Broadcast & Weather Channels



IC-R8600 | Wideband SDR Receiver

- 10 kHz to 3 GHz Super Wideband Coverage • Real-time Spectrum Scope w/Waterfall Function • Remote Control Function through IP Network or USB Cable • Decodes Digital Incl P25, NXDN™, D-STAR • SD Card Slot for Receiver Recorder



ID-5100 AD

VHF/UHF Dual Band Digital Transceiver

- Analog FM/D-Star DV Mode • SD Card Slot for Voice & Data Storage • 50W Output on VHF/UHF Bands • Integrated GPS Receiver • AM Airband Dualwatch

ID-52A | VHF/UHF D-STAR Portable

- Bluetooth® Communication • Simultaneous Reception in V/V, U/U, V/U and DV/DV • Enriched D-STAR® Features Including the Terminal Mode/Access Point Mode • UHF (225~374.995MHz) Air Band Reception



5 Ways to Shop!

• RETAIL LOCATIONS – Store hours 10:00AM - 5:30PM - Closed Sunday

• PHONE – Toll-free phone hours 9:30AM - 5:30PM

• ONLINE – WWW.HAMRADIO.COM

• FAX – All store locations

• MAIL – All store locations

ICOM®

FOLLOW HRO ON SOCIAL MEDIA



twitter.com/HamRadioOutlet
facebook.com/HROHamRadioOutlet
instagram.com/HamRadioOutlet
youtube.com/HamRadioOutlet

The Icom logo is a registered trademark of Icom Inc. Toll-free including Hawaii, Alaska and Canada. All HRO 800-lines can assist you if the first line you call is busy, you may call another. Prices, specifications and descriptions subject to change without notice.

HAM RADIO OUTLET®

WWW.HAMRADIO.COM

***Free Shipping and Fast Delivery!**



FTDX101MP | 200W HF/50MHz Transceiver

- Hybrid SDR Configuration • Unparalleled 70 dB Max. Attenuation VC-Tune • New Generation Scope Display 3DSS • ABI (Active Band Indicator) & MPVD (Multi-Purpose VFO Outer Dial) • PC Remote Control Software to Expand the Operating Range • Includes External Power With Matching Front Speaker



FT-710 Aess | HF/50MHz 100W SDR Transceiver

- Unmatched SDR Receiving Performance • Band Pass Filters Dedicated for the Amateur Bands • High Res 4.3-inch TFT Color Touch Display • AESS: Acoustic Enhanced Speaker System with SP-40 For High-Fidelity Audio • Built-in High Speed Auto Antenna Tuner



FTM-500DR | C4FM/FM 144/430MHz Dual Band Xcvr

- Front Firing Acoustically Enhanced Speaker System • True Dual Band Operation, C4FM/C4FM Digital D-D Dual Receive • 2.4" High-Resolution Full-Color Touch Panel Display • Built-in High Precision GPS Receiver • Wireless Operation Capability with Optional Bluetooth® Headset



FTDX10 | HF/50MHz 100 W SDR Transceiver

- Narrow Band and Direct Sampling SDR • Down Conversion, 9MHz IF Roofing Filters Produce Excellent Shape Factor • 5" Full-Color Touch Panel w/3D Spectrum Stream • High Speed Auto Antenna Tuner • Microphone Amplifier w/3-Stage Parametric Equalizer • Remote Operation w/optional LAN Unit (SCU-LAN10)



FT-891 | HF+50 MHz All Mode Mobile Transceiver

Stable 100 Watt Output • 32-Bit IF DSP • Large Dot Matrix LCD Display with Quick Spectrum Scope • USB Port Allows Connection to a PC with a Single Cable • CAT Control, PTT/RTTY Control

FT-70DR C4FM/FM 144/430MHz Xcvr

- System Fusion Compatible • Large Front Speaker delivers 700 mW of Loud Audio Output • Automatic Mode Select detects C4FM or Fm Analog and Switches Accordingly • Huge 1,105 Channel Memory Capacity • External DC Jack for DC Supply and Battery Charging



FT-991A | HF/VHF/UHF All Mode Transceiver

- Real-time Spectrum Scope with Automatic Scope Control • Multi-color waterfall display • State of the art 32-bit Digital Signal Processing System • 3kHz Roofing Filter for enhanced performance • 3.5 Inch Full Color TFT USB Capable • Internal Automatic Antenna Tuner • High Accuracy TCXO



FTM-300DR | C4FM/FM 144/430MHz Dual Band

- 50W Output Power • Real Dual Band Operation • Full Color TFT Display • Band Scope • Built-in Bluetooth • WIRES-X Portable Digital Node/Fixed Node with HRI-200

FT-5DR C4FM/FM 144/430 MHz Dual Band

- High-Res Full-Color Touch Screen TFT LCD Display • Easy Hands-Free Operation w/Built-In Bluetooth® Unit • Built-In High Precision GPS Antenna • 1200/9600bps APRS Data Communications • Supports Simultaneous C4FM Digital • Micro SD Card Slot



FT-2980R | Heavy-Duty 80W 2M FM Transceiver

- 80 watts of RF power • Large 6 digit backlit LCD display for excellent visibility • 200 memory channels for serious users

FT-65R | 144/430 MHz Transceiver

- Compact Commercial Grade Rugged Design • Large Front Speaker Delivers 1W of Powerful Clear Audio • 5 Watts of Reliable RF Power Within a compact Body • 3.5-Hour Rapid Charger Included • Large White LED Flashlight, Alarm and Quick Home Channel Access



FTDX101D | HF + 6M Transceiver

- Narrow Band SDR & Direct Sampling SDR • Crystal Roofing Filters Phenomenal Multi-Signal Receiving Characteristics • Unparalleled - 70dB Maximum Attenuation VC-Tune • 15 Separate (HAM 10 + GEN 5) Powerful Band Pass Filters • New Generation Scope Displays 3-Dimensional Spectrum Stream



FTM-200DR | C4FM/FM 144/430MHz Dual Band

- 1200/9600bps APRS® Data Communications • 2" High-Res Full-Color TFT Display • High-Speed Band Scope • Advanced C4FM Digital Mode • Voice Recording Function for TX/RX

FTM-600R | 50W VHF/UHF Mobile Transceiver

- All New User Operating Interface-E20-III (Easy to Operate-III) • Robust Speaker Delivers 3W of Clear, Crisp Receive Audio • Detachable Front Panel Can Be Mounted in Multiple Positions • Supports Optional Bluetooth® Wireless Operation Using the SSM-BT10 or a Commercially Available Bluetooth® Headset



5 Ways to Shop!

• RETAIL LOCATIONS – Store hours 10:00AM - 5:30PM - Closed Sunday

• PHONE – Toll-free phone hours 9:30AM - 5:30PM

• ONLINE – WWW.HAMRADIO.COM

• FAX – All store locations

• MAIL – All store locations

YAESU
The radio

ANAHEIM, CA
(800) 854-6046

PORTLAND, OR
(800) 765-4267

PHOENIX, AZ
(800) 559-7388

MILWAUKEE, WI
(800) 558-0411

WOODBIDGE, VA
(800) 444-4799

WINTER SPRINGS, FL
(800) 327-1917

SACRAMENTO, CA
(877) 892-1745

DENVER, CO
(800) 444-9476

PLANO, TX
(877) 455-8750

NEW CASTLE, DE
(800) 644-4476


SALEM, NH
(800) 444-0047

ATLANTA, GA
(800) 444-7927

*On most orders over \$100 in the continental US. (Rural locations excluded.) Contact HRO for promotion details. Toll-free including Hawaii, Alaska and Canada. All HRO 800-lines can assist you. If the first line you call is busy, you may call another. Prices, specifications and descriptions subject to change without notice.

Take the Mystery out of Radio Programming

Be prepared when storms and emergencies strike! Easily program radio memories and other menu settings.

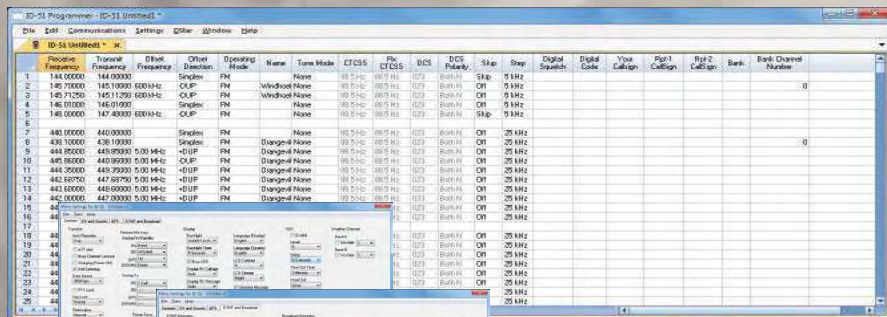

Easy Editing Includes:

- Auto fill for many details.
- Calculations (offset frequency, offset direction, etc) are done for you.
- Allowable values match those of your radio.

Your radio does more than just memories. So does the software.

- Explore all your radio can do by seeing the features on the computer screen.
- Options you struggle to set from the face of the radio can be set up and saved in the Programmer, then easily transferred to the radio.

530+
435 unique radio
Programmers...
Check for your
radio model at:
www.rtsystems.com

Available from RT Systems or Your Local Radio Dealer
800-921-4834 | www.rtsystems.com
Personal Assistance Mon.-Fri., 9:00-6:00 EST


rt SYSTEMS
RADIO PROGRAMMING MADE EASY

LiFePO4 Batteries

Bioenno Power®

sale@bioennopower.com
(888) 336-7864
www.bioennopower.com

Foldable Solar Panels



PowerFilm.
Made in the USA SOLAR

5 to 220 Watts

sales@californiapc.com
(877) 487-1213

CaliforniaPC.com

W5SWL Electronics

**Premium Quality
RF Connectors
Order Direct!**

Wide Selection of Connectors

- UHF & N
- BNC & SMA
- Mini-UHF & FME
- TNC & C
- MC MCX & MMCX
- QMA SMB & SMC
- DIN & Low PIM
- Reverse Polarity
- RF Adapters
- Bulkheads

And Much More!

- Dave's Hobby Shop by W5SWL
- Ham Radio Gadgets
- RF & Technical Parts
- New & Surplus Materials

Order at www.W5SWL.com

Ships Fast From The Arkansas River Valley



ARRL

**The BEST Ham
Radio Resources!**

Shop online at
www.arrl.org/shop

MFJ . . .the World Leader in Ham Radio Accessories!

MFJ Dummy Loads & SWR/Wattmeters

Dummy Loads

World's most popular Dry 300 Watt HF/VHF Dummy Load

Air-cooled, non-inductive resistor in a perforated metal housing; Has SO-239 connector. Full 300W for 30 seconds. Derating curve to 5 minutes. SWR below 1.1:1 to 30 MHz, 1.5:1 to 650 MHz. Compact 2 1/4 x 2 1/4 x 7 inches. MFJ-260CN, \$79.95. With type "N" connector.



MFJ-260CN
\$69.95

Dry 1.5 kW HF/VHF/UHF Dummy Load

Ham radio's most versatile 1.5 kW 50 ohm dry dummy load covers DC to 650 MHz. SWR 1.1:1 to 30 MHz, 1.3:1 to 650 MHz. Handles 1500W for ten seconds, 100W for 10 minutes. 3Wx3Hx9D in. SO-239 connector. MFJ-264N, \$139.95. With type "N" connector.



MFJ-264N
\$129.95

Oil-Cooled 1 kW CW, 2 kW SSB 50-Ohm VersaLoad™

Run 1KW CW or 2 KW PEP for 10 minutes. Run continuous duty with 200 Watts CW or 400W PEP. Transformer oil included. SWR 1.2:1 to 30 MHz. Low SWR to 400 MHz. SO-239 connector. Safety vent with cap, carrying handle. 7 1/2 Hx6 5/8 D in. MFJ-250X, \$79.95. No transformer oil.



MFJ-250X
\$119.95

500 MHz, 100 Watt Dummy Load

Connects directly with built-in PL-259. Finned aluminum air-cooled heatsink. 15 Watts continuous, 100W peak. SWR < 1.5:1, DC-500 MHz. 1 1/8 inch round by 3 inches long. MFJ-262B, \$79.95. PL-259. 35 Watts continuous, 200W for 5-seconds. SWR < 1.2:1 DC-1 GHz.



MFJ-262B
\$39.95

MFJ 2500W fan-cooled Dry Load

MFJ's 2500 Watt fan cooled load handles legal limit amps, 2500W average one minute on, ten minutes off, 300W continuous. DC-6 Meters. SWR < 1.25, 30 MHz; < 1.4, 30-60 MHz. Detailed power curve. 12 VDC or 110 VAC. 8 1/4 Wx4 Hx 9 1/2 D in. SO-239s. 5 pounds.



MFJ-265
\$299.95

Switchable RF Dummy Load

Select 16.6, 25, 50, 100, 150 Ohm dummy loads. Test/calibrate your wattmeters, SWR calibrators. At 50 Ohms it handles 300 Watts for 30 seconds with SWR < 1.1, 60 MHz. SO-239. 4 1/2 Wx2 1/4 Hx6 1/2 D in. Optional 12 VDC/110 VAC adaptor, MFJ-1312D, \$24.95.



MFJ-251
\$209.95

3 GHz, 300 Watts Dry Dummy Load

New high-tech metal film resistor on large heavy-duty air-cooled heatsink. 300 Watts for ten seconds and 125W continuously. SWR < 1.1, 1 GHz; < 1.2, 1.5 GHz; < 1.5, 3 GHz. N-connector. 10 3/4 Wx2 1/4 Hx5 1/4 D inches.



MFJ-263
\$169.95

1.5kW Dry Dummy Load/SWR/Wattmeter

Tune up your transceiver, linear amplifier or antenna tuner into a safe 50 Ohm dummy load at full power. Then instantly switch to your antenna and monitor SWR, forward and reflected power on lighted cross-needle meter. 300/3000 Watt ranges. DC-60 MHz. Test/tune Xceivers, amps, tuners, baluns, filters, coax, stubs.



MFJ-267
\$239.95

SWR/Wattmeters

Compact Cross-Needle SWR/Wattmeters

Large 3-inch lighted Cross-Needle meter covers 1.8-200 MHz in 30/300W power ranges. Read forward, reflected power, SWR simultaneously. 3 1/4 Wx3 1/4 H x3 1/4 D in. SO-239 connectors. MFJ-842, \$79.95. 140-525 MHz, 15/150W.



MFJ-842
\$79.95

High-accuracy 1.8-60 MHz Digital SWR/Wattmeter

Highly accurate! Auto-ranging select 25W, 250W, 1500W ranges with full 10-bit resolution. Frequency compensated data insures highest accuracy. True peak/average forward/reflected power, SWR and frequency are simultaneously displayed on backlit LCD and large 3-inch lighted cross needle meter. Peak hold. LED, buzzer, amplifier-bypass alerts and protects your amplifier when SWR is high and toggles extra relay. 6 1/2 Wx2 5/8 Hx6 D in. MFJ-826B, \$239.95. No meter, ampr bypass, control relay.



MFJ-826B
\$299.95

MFJ GrandMaster™ SWR/Wattmeters

GrandMaster™ SWR/Power Meters are the Cadillacs of ham radio! Large 3 1/4 x1 1/4 inch precision illuminated meter gives easy wide-angle viewing of SWR, forward or reflected power. 7 1/2 Wx3 1/8 Hx4 1/4 D in. SO-239s. MFJ-870, \$119.95. 1.6-60 MHz. 30/300/3000 Watt ranges. MFJ-874, \$179.95. 1.8-525 MHz. 5/20/200 Watt ranges.



MFJ-870
\$119.95

MFJ giant 6.5 inch SWR/Wattmeter

World's largest HF+6M SWR/Wattmeter has giant 6 1/2 inch meter! Extra-long scales gives highly accurate SWR/power 1.8-54 MHz. Huge numbers make reading easy. True peak or average forward and reflected power. 20/200/2000 Watt ranges. 9 Volt battery, 12 VDC or 110 VAC with MFJ-1312D, \$34.95. 7 Wx5 1/2 Hx5 D in. SO-239s.



MFJ-868B
\$199.95

VHF SWR/Wattmeter plus Field Strength

World's most popular -- and most affordable -- VHF SWR/Wattmeter. Read SWR, forward and reflected power over 144-220 MHz in two ranges, 30/300W. Built-in field strength meter for 1-220 MHz. 4 1/2 Wx2 1/4 Hx3 D in.



MFJ-812B
\$59.95

Compact Digital SWR/Wattmeters

Displays forward, reflected power, SWR (1.6-60 MHz) and battery all in a single glance! Large 1 1/2" forward power digits and 5/8" reflected/SWR digits! 0-200W. Power/backlight on/off. SO-239s. MFJ-847, \$139.95. 125-525 MHz, 0-120W. MFJ-849, \$229.95. Large 3.5" bright orange LCD displays SWR, forward/reflected power. 1.5-525 MHz, 200W, HF/VHF-UHF switch.



MFJ-847
\$139.95

MFJ HF QRP SWR/Wattmeter

Read forward, reflected power 1.8-50 MHz, 0-5W. Also reads SWR, relative power 100 mW to 50W. SO-239s. 4 1/2 Wx 2 1/4 H x3 D in.

MFJ-813
\$59.95

VHF/UHF SWR/Wattmeter

Lighted Cross-Needle, SWR/Watts, 144/220/440 MHz, 30/300W Forward power, 6/60W Reflected power.



MFJ-862
\$99.95



MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759
Phone: (662) 323-5869 • Tech Help: (662) 323-0549 • FAX: (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. (c) 2024 MFJ Enterprises, Inc.

• 1 Year No Matter What™ warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ



*NEW! ANC-4+



ANC-4+ Antenna Noise Canceller

The familiar, rugged ANC-4 now with:

- External TX/RX control - great for QRP operation
- Continuously Adjustable TX hang time
- Noise amp front end protection
- TX LED indicator
- SMT construction w/ gold-plated PCB
- Heavy steel laser-cut housing for precise tuning and mechanical stability

Kill Noise before it reaches your receiver!
Great for suppressing power line noise, plasma TV noise & many other local electrical noises.



Navigator

The Premier Sound Card Modem!

See QST Short Takes Review - May 2014-P. 62

- Quiet - hear what others miss!
- Proven USB Sound Card built-in
- Precise FSK
- Genuine K1EL Winkeyer CW IC
- Complete - Six FTDI COM ports
- Universal Rig Control for every radio
- Works well with HRD, M110A, Fldigi, FT8 & many more software programs
- Front-Panel Audio & CW controls
- USB connected and powered
- Convenient - No annoying jumpers!



PK-232SC+

Multimode Data Controller*

- RTTY
- Packet
- Pactor
- CW
- PSK31 & all the Sound Card modes!

**Upgrade any PK-232 to the PK-232SC
with New Lower Combo Pricing
for SC & DSP Upgrade!*

Customize your PK-232 installation with our complete line of upgrades, accessories and cables.

100,000 sold - All-time top selling data controller!

- Single USB connection to computer
- USB Sound Card built-in
- 3-Way Rig Control built-in - logic level, RS-232 & USB!
- Computer isolated from radio
- Real FSK & AFSK
- keyboard CW - send and receive
- Dual Port - two radios at same time!



PK-96/100 USB Packet TNC

1200/9600 bps AX.25 Packet

Available with USB or RS-232 connection

■ HamLinkUSB™ USB-to-RS-232 Adapter

Proven FTDI Chip. 9 and 25 pins for all radios, TNCs, Rotor Controllers & more!

■ HamLinkUSB™ Rig Control+

C-IV, CAT, RTS (PTT, FSK or CW) for sound card software
Perfect for HRD owners with simple sound card adapters

www.timewave.com
sales@timewave.com

Timewave Technology Inc.
360 Larpenteur Ave. W., Suite 100
St. Paul, MN 55113 USA

651-489-5080

MFJ Deluxe Code Oscillator

IN STOCK!



Wow!

MFJ-557, \$69.95

MFJ-557 lets you practice sending Morse Code at home, work, in your car, outside on the picnic table, anywhere. Volume adjusts from barely audible to full classroom sound. Black Morse straight key on a non-skid heavy steel base -- stays put and doesn't move around while sending. Built-in speaker, adjustable contacts. Use 9V battery, not included. Compact 8.5Wx3.75Hx2.25D inches.

MFJ-550

\$34.95 Key only.

MFJ CW Reader and Keyer Combination

Plug MFJ's CW Reader with Keyer into your transceiver's phone jack and key jack.

Now you're ready to compete with the world's best hi-speed CW operators -- and they won't even know you're still learning the code! 5-99 WPM.

Automatic speed tracking. Large 2-line LCD shows send/receive messages. Use pad-

dle or computer keyboard.

Easy operation. Front panel speed, volume controls, 4 message memories, type ahead buffer, read again buffer, adjust weight/sidetone, speaker. RFI free.

MFJ-551, \$59.95. RFI suppressed keyboard, a must to avoid RFI problems.

MFJ-464
\$259.95

(Keyboard, paddle not included.)



MFJ Pocket-Size CW Reader™ and Code Tutor



MFJ-461, \$119.95. Place this tiny pocket size MFJ Morse Code Reader near your receiver's speaker

and watch CW turn into solid text messages as they scroll across an easy-to-read LCD. No cables to hook-up, no computer, no interface, nothing else needed! Practice by copying along with the MFJ-461. Learn the code and increase your speed as you instantly see if you're right or wrong. Eavesdrop on interesting Morse QSOs from hams all

over the world. MFJ's *AutoTrak™* automatically locks on, tracks and displays CW to 99 WPM. Serial port lets you display full screen CW text on your computer monitor with your computer and terminal program. Tiny 2 1/4 x 3 1/4 x 1", 5 1/2 oz. Fits in your shirt pocket, take it anywhere. Use 9 Volt battery.



MFJ-418, \$119.95. Morse Code Tutor. Learn Morse code anywhere! Copy letters, numbers, prosigns or any combination or words or QSOs. ARRL/VEC format. Go from zero code speed to a high speed *CW Pro!* High contrast LCD, built-in speaker.

MFJ-564 Iambic Paddles \$109.95



Deluxe iambic paddles. Tension/contact spacing adjustments, steel bearings, precision frame, non-skid feet. Chrome (MFJ-564). Black (MFJ-564B). **MFJ-561, \$34.95.** Tiny iambic key.

MFJ-419 CW Elmer \$169.95



MFJ-419 is a pocket-sized multi-function training tool for learning to receive and send Morse Code with a straight key. Helps you learn & send clean CW.

MFJ-407E Deluxe CW Keyer \$129.95

MFJ Curtis-Keyer has all modes, dot-dash memories, jam-proof spacing, weight, sidetone, built-in speaker. Speed, weight and tone controls and tune, semi-auto and on/off are on front panel.



MFJ-401E Econo CW Keyer \$109.95

Front-panel volume/speed controls (8-50 wpm), tune switch. Internally adjust weight/tone. Solid state keying. Tiny 4x2x3 1/2 inches.



MFJ-422E Keyer/Paddle \$249.95

MFJ CW keyer and iambic Paddle combo lets you send smooth, easy CW. Front panel volume/speed (8-50 WPM), built-in dot-dash memories, speaker, sidetone.



New! Ver. 3.0

MFJ-1234C-EBP . . . Remotely operate your transceiver from anywhere in the world!



MFJ-1234C-EBP
\$299.95

Everything but Pi

Use any web browser on your phone, iPad, tablet, laptop, desktop even a Kindle!

Use nearly any rig with CAT control. All

* RigPi trademarked. Howard Nurse, W6HN. Raspberry Pi is trademark of Raspberry Pi Foundation.

modes: SSB, CW, FM, digital. WSJT-X, Fldigi are installed.

Control via the internet-- radio, rotor, CW keying, VoIP, digital, logging, spot monitoring, callbook lookup.

Look-up calls using included FCC database or optional QRZ sub. Monitor DX spots for un-worked or unconfirmed calls.

Design, maintain multiple logs. Upload

ADIF logs to ARRL LoTW server. Send CW from mobile device, keyboard or paddle.

Includes email, word processing, spreadsheet programs, 1000's of Linux programs. Modify, program RigPi features using text editor.

MFJ-1234C-EBP requires a Raspberry Pi-4 or 3B+ provided by you.

TECH HELP

• <https://rigpi.groups.io>
• <https://rigpi.net>

Plug & Play FT-8 and all Digital Modes!



MFJ-1205, \$129.95.

Plug&Play all digital modes! Specify your

radio when ordering and just plug USB cable into your computer. Download **free** software from internet and operate: FT-8, JT4, JT-65, JT6M, FSK441, WSPR, PSK-31, EchoLink, APRS, CW, RTTY, packet, Amtor, more. Easy-to-set transmit/receive levels. Transformer isolated audio, PTT sensing eliminates adjustments. Universal, never obsolete.

MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759

Phone: (662) 323-5869 • **Tech Help:** (662) 323-0549 • **FAX:** (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. (c) 2024 MFJ Enterprises, Inc.

• 1 Year No Matter What™ warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ



bhi bhi

Enjoy great receive audio with a bhi DSP noise canceling product!

EQ20-DSP 10W Parametric Equalizer Products

In-Line Module



- 5W amplified DSP noise canceling In-Line module
 - 8 filter levels 8 to 40dB
 - Use in-line with a loudspeaker
- Great review in Jan '23 QST!

Dual In-Line

Fully featured dual channel amplified DSP noise cancelling in-line module - Use in-line with an extension speaker



Improved audio for those with hearing loss - Two mono inputs or one stereo input - Use with passive speakers or Phones - DSP noise cancelling versions EQ20-DSP/EQ20B-DSP

NES10-2MK4



5W amplified DSP noise cancelling speaker
- Compact speaker for mobile or base station
- Audio bypass feature

DESKTOP MKII



10W amplified DSP noise canceling speaker
- Simple controls
- 8 DSP filter levels
- Line level and speaker level audio inputs

New
NEDSP1962-KBD
5W amplified
DSP speaker retrofit
pcb module now
available!

Compact In-Line



- Simple controls
- Use with speakers or headphones
- Line/speaker level inputs
- Use mobile with AA batteries

DX ENGINEERING

DXEngineering.com -1-800-777-0703

www.bhi-ltd.com

GigaParts

-1-256-428-4644

E & O.E.
PayPal VISA MasterCard

Starlink® RV Pole Kits
Plus Antenna Masts and Mounts for ECOM
Great for wire antennas! Made in America!

K6AMS

Hitched4fun.com

PROMOTING THE USE OF TEN METERS SINCE 1962

Ten-Ten International Net, Inc.

Awards - QSO Parties - Special Events - Paperchasing

NETS DAILY (except Sunday) on 28.380 and 28.800 at 1800z

CHECK US OUT ON THE WEB
www.ten-ten.org / www.10-10.org

1349 Vernon Ter San Mateo CA 94402-3331

the **ARRL**
CURRENT

Are You Subscribed?

*Your monthly
overview of ARRL
publications and
member benefits.*

ARRL The National Association for
Amateur Radio®

Stand out this Field Day!
Custom labels,
color wraps, and
connector options
available for all
size cables.



We have everything you need.

713-492-2722
info@abrind.com
abrind.com



ABR
INDUSTRIES™



Dealer/Catalog/Manuals
Visit: <http://www.mfjenterprises.com>
or call toll-free 800-647-1800

• 1 Year No Matter What™ warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ

MFJ ENTERPRISES, INC.
300 Industrial Pk Rd, Starkville, MS 39759
PH: (662) 323-5869 Tech: (662) 323-0549
FAX: (662) 323-6551 8-4:30 CST, Mon-Fri. Add shipping.
Prices and specifications subject to change. (c) 2023 MFJ Enterprises, Inc.



MFJ-281, \$19.95. *Clear-est speech you ever heard!*
3" speaker, 8W, 8 Ohms, 6' cord, 3.5 mm plug.

Best Sellers! Dual Band Mag Mount Ant

MFJ-1724B
\$29⁹⁵
2-Meter/440 MHz antenna is perfect for your dual band mobile or HT. Powerful 3 1/2 inch magnet holds firm at high-way speeds, rubber guard, 19" black stainless steel whip, low SWR, excellent gain, 300 Watts PEP, 12 feet coax with PL-259. *Free BNC adapter.*



MFJ-1729 **\$49⁹⁵** **MFJ-1729**
Power*Gain™
Ham Radio's most powerful dual band antenna gives whopping gain on 440 MHz and 2-Meters! Low SWR. 27 1/2" stainless steel *Slim-line™* radiator minimizes wind vibration for less SWR flutter for longer range, better readability. 12' coax, PL-259, Heavy duty magnet mount.



MFJ-1728B **\$39⁹⁵** **MFJ-1728B 5/8**
Wave 2/6 Meter
Mobile Full 50-
inch 5/8 Wave gives you maximum possible gain of *any* single element antenna on 2-Meters. On 6-Meter "magic band" you get a powerful signal with its high-performance low SWR *full* 1/4 Wave. 300 Watts PEP, heavy duty magnet, 12 feet coax, stainless steel radiator.



MFJ Super-Strong Magnet Mounts with Coax/PL-259

MFJ 5-inch Magnet



Best Seller!
These jet-black 5-inch

MFJ-335BS
SO-239
MFJ-335BM **\$29⁹⁵**
NMO
MFJ-335BT
3/8 - 24
For HF sticks

super strong magnet mounts have 17' coaxial line terminated with PL-259 connectors. SO-239 (BS) or NMO (BM) for your VHF/UHF antennas or 3/8-24 threaded (BT) for your HF hamstick antennas with a 3/8-24 threaded connector.

MFJ 3-inch Magnet



MFJ-333BS pictured
\$19⁹⁵ Each

3-inch black magnet antenna mounts. 17 foot coax is terminated with PL-259 connector. Choose SO-239 (BS) or NMO (BM). For VHF/UHF lightweight antennas.

MFJ SMA/BNC Cables, \$19⁹⁵

Release strain on your HT's antenna connector! 3 ft. flexible, mini coax with SO-239 connector.

A. MFJ-5612S SMA Male.
B. MFJ-5612SF SMA Female Wouxun/Baofeng.
C. MFJ-5612B BNC Male.



MFJ Triple 5" Magnets



\$49⁹⁵ Each
MFJ-336S
SO-239
MFJ-336M
NMO
MFJ-336T
3/8x24

Three super-strong 5-Inch Magnets make up this MFJ *Goliath™* Tri-Magnet Mount. 1/4" thick steel triangle base. 17' coax. Select SO-239, NMO, 3/8-24 antennas. **Caution:** once on, it's difficult to get off!

HF/VHF/UHF 200 Watt Duplexers



MFJ-916B
\$44⁹⁵
Use separate HF/VHF and 440 MHz UHF antennas with single transceiver **OR** use two separate HF/VHF and 440 MHz UHF transceivers with a single HF/VHF/UHF antenna. Heavy-duty diecast enclosure houses low/high pass networks that separate/combine HF/VHF/UHF signals. Low loss SO-239s. 50 Ohm ports. **MFJ-916BC**, \$79.95 3 ft. coax pigtails on 2-port side.

1.8-200 MHz SWR/Wattmeter

Compact 1.8-200 MHz SWR/Wattmeter has **HUGE** 3" *Cross-Needle* meter. Read forward/reflected power and SWR simultaneously. Perfect for mobile/portable. 30/300 Watt ranges. Built-in meter light. SO-239s. 3 1/4 W x 3 1/4 H x 3 1/4 D". **MFJ-842**, \$79.95 covers 140-525 MHz, 15/150 Watts.

MFJ-822
1.8-200 MHz
\$79⁹⁵
MFJ-842, 140-525



VHF/UHF Hi-Gain Antennas



A. MFJ-1402, \$29.95.
VHF/UHF RuffRider Junior™. Premium, short 16 1/2" antenna fits in any garage on any auto. 1/4 Wave on 2 Meters, 1/2 Wave, gain on 440 MHz. 100W. No foldover. B or C.

B. MFJ-1412, \$39.95.
VHF/UHF RuffRider High Power™. Just 40" long handles full 200 Watts. Great for high power mobile amp. 1/2 Wave, gain on 2 Meters, 5/8 Wave, great gain on 440 MHz. Black or chrome.


C. MFJ-1422, \$59.95.
VHF/UHF RuffRider High Gain™. 41 1/2 inch long antenna gives extra gain with little height increase. Handles 150 Watts. 1/2 wave with good gain on 2 Meters, 5/8 wave, excellent gain on 440 MHz. Black or chrome.

D. MFJ-1432, \$69.95.
VHF/UHF RuffRider Hyper Gain™. 62 1/2" brute gives whopping gain on 7/8 Wave 2-Meters, 5/8 Wave and a **MONSTER** gain on 440 MHz. MFJ will rock your ham radio world! 150 Watts. Use tri-magnet. Black or Chrome.



MFJ Mobile HF Ham Sticks

MFJ-1675T - 75 Meters
MFJ-1660T - 60 Meters
MFJ-1640T - 40 Meters
MFJ-1630T - 30 Meters
MFJ-1620T - 20 Meters
MFJ-1617T - 17 Meters
MFJ-1615T - 15 Meters
MFJ-1612T - 12 Meters
MFJ-1610T - 10 Meters
MFJ-1606T - 6 Meters
\$21⁹⁵ Each
6-30 Meters
40-60 Meters, \$22.95
75 Meters, \$29.95



Each is ruggedly constructed. A heavy duty 4', 3/8 inch diameter fiberglass rod; a nearly indestructible .125 inch diameter PH-17-7 stainless steel whip and chrome plated brass fittings will give you years of service. It's sleek, low profile construction has low wind loading and its semi-rigid fiberglass eliminates the need for springs or guys.

Black anti-static jacket protects loading coil, blends with any vehicle. Stainless steel whip is adjustable for lowest SWR. Push it down to park in the garage or fully extend it for maximum efficiency during mobile operation.

Includes allen wrench and complete tuning and matching instructions. Handle 250 Watts PEP. Whips are 7 feet fully extended, and collapse to about 4 feet for easy storage. **Simply** screws into any 3/8 x 24 female mount for quick band-changing. Get them all for great band coverage!

3/8-24 Ham Stick Mounts

MFJ-343, \$19.95.
Tough 3/8-24 hard mount for permanent installation.



MFJ-342T, \$19.95.
3/8-24 HF horizontal or vertical 1/4 or 1/2 inch pipe or mirror mount.



MFJ-344, \$19.95. Like MFJ-342T, but horizontal pipe mount.

www.mfjenterprises.com

ADVANCED SPECIALTIES INC.

YAESU
The radio

www.advancedspecialties.net

BIG ONLINE CATALOG

VX-6R
Triband
Submersible
Hand Held

FTM-300DR
Dual-Band Digital

AMATEUR RADIO EQUIPMENT & ACCESSORIES • SCANNERS
ANLI • COMET • UNIDEN • YAESU

(201)-VHF-2067
114 Essex Street, Lodi, NJ 07644
Closed Sunday & Monday


Tactical Radio Carrier



- Protect
- Package
- Deploy
- Stackable

www.tac-comm.com

DTMF decoder board with eight relays



Remote control eight devices via radio audio. Password protection against unauthorized entry. Unique board ID. Comes assembled with relays. 4.5" x 2.5".

Intuitive Circuits, LLC
Voice: (248) 588-4400
<http://www.icircuits.com>

DTMF-8 \$119⁰⁰
Visa • MC • Prepayment

 **PreppComm**
Amateur Radio

In an emergency, rely on the MMX Morse Code transceiver...

- * Operational simplicity for untrained users
- * Easy to read screen, works like texting
- * QRP operation with 12V or 5V battery
- * Best in class decoding below noise floor, even when NOT AUDIBLE in the noise

Real preppers use PreppComm



The standard for Morse communication



Morse Made Easy™

www.PreppComm.com

 **MANUFACTURING FOR RADIO SINCE THE BEGINNING**



- Racks & Cabinets, Shelves, Panels, Outlet Strips
- Small Cases & Project Boxes
- Transformers

RACKS & CABINETS TRANSFORMERS SMALL CASES

Technical Data, Drawings, List of Stocking Distributors:
www.hammondmfg.com

Air Boss Antenna Launcher

www.olahtechnologies.com

See Video

For when you want your antenna on top

\$99.⁹⁹

Free shipping to lower 48
olahtechnologies@gmail.com

Kenwood Radio Resurrection kits!



TS-930 & TS-940 Supply Upgrade Kits
Over 700 units sold!



TS-930/TS-940 PA Replacement Kit
Over 100 units sold!



TS-2000 Driver Replacement Kit
Now taking pre-orders

Easy to install. Proven Track Record & Guaranteed!

MADE IN THE USA 916-205-2200 k6iok.com **Compudigital Industries**

**Inspiration...
Exploration...
Experimentation**




Amateur Radio on the International Space Station—ARRISS

Your donations will help support continuing operations and Amateur Radio equipment upgrades on the ISS.

Receive an ARISS Challenge Coin for a donation of \$100 or more

Visit www.ariss-usa.org/donate and click "Donate" to keep Amateur Radio in space!



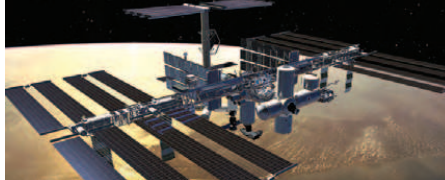

MFJ Power Supplies

World's Best and Largest Selection of Clean, NO RF Hash, no RFI power supplies are designed for ultra-reliable ham radio! High duty cycles on switchers for long Digital mode transmissions!

75-Amps, \$379⁹⁵

MFJ-4275MV
high-current switching power supply gives 75A max/70A continuous. Great for ALS-500M amplifier. Adjustable output 4-16 VDC/ 110/220 VAC. Binding posts, quick connects, *PowerPoles*^(R), cigarette lighter socket on front. Battery charger gives charging current of 20A max, 5A continuous. 9³/₄Wx5¹/₂Hx9¹/₂D". Only 10.5 lbs.

45-Amps, \$259⁹⁵

MFJ-4245MV
Switching power supply gives 45A surge/40A continuous. 9-15 VDC out. 85-260 VAC in. Low ripple, highly regulated. 5-way posts, cigarette lighter, quick connects. 5 lbs., 7¹/₂Wx4³/₄Hx9D".

25-Amps, \$169⁹⁵

MFJ-4225MV
Switching power supply gives 25A surge, 22A continuous. Adjustable 9-15 VDC output, 85-260 AC input. Large 3" dual Amp/Volt meters, binding posts, cigarette lighter socket. 3.7 lbs., 5¹/₄Wx4¹/₂Hx6D".

MFJ PowerPole^(R) Splitters

MFJ-1104, \$59⁹⁵
PowerPole^(R) Splitter, 30 Amp fused input, outputs fused at 25, 10, 5A. Open fuse indicator. 2³/₄Wx3¹/₄Hx1¹/₂D".

MFJ-1107, \$79⁹⁵
40A fused binding posts input, 4 fused *PowerPole*^(R) outputs, two 2.1 mm center positive power jacks.

MFJ-1106, \$74⁹⁵

One in, six out *PowerPoles*^(R). 30A total. 7 sets of mating connectors included.

\$159⁹⁵



MFJ-4230MV, \$149⁹⁵
Binding Posts on back.



MFJ-4230MPF, \$159⁹⁵
PowerPoles^(R) on front of unit.

MFJ-4230DMP, \$189⁹⁵

Like MFJ-4230MVP but has bright orange digital Volt/Amp display.



25-Amps, \$129⁹⁵

MFJ-4125 gives 25A surge, 22A continuous. 13.8 VDC switcher. 5-way binding posts on front and quick connects on back. 3.5 lbs.

35-Amps, \$199⁹⁵

MFJ-4035MV
19.2 lb. transformer, 35A max, 30A continuous. 1-14 VDC out, 110 VAC in. Highly regulated, 1% load, 1 mV ripple. 5-way posts, cig lighter. 9¹/₂Wx6Hx9³/₄D".



28-Amps, \$129⁹⁵

MFJ-4128. 28A surge, 25A continuous. 13.8 VDC. AC input is 85-135/170-260 VAC. 5-way binding posts, cigarette socket.

25-Amps, \$139⁹⁵

MFJ-4125P. 25A surge, 22A cont. 13.8 VDC switcher. 2-pair *PowerPoles*^(R), 5-way posts, quick connects. 3¹/₂ lbs.



15-Amps, \$99⁹⁵

MFJ-4115. 17A surge, 15A cont. 13.8 VDC. 110/ 220 VAC. 3³/₄Wx2¹/₄Hx7³/₄D", 1.5 lb. 5-way posts.



MFJ-4215MV, \$119.95.

Like MFJ-4115 but has backlit volt/amp meters.



MFJ High Current DC Multi-Outlet Strips





Power multiple transceivers/accessories from a single DC power supply

MFJ-1118, \$119⁹⁵
Power two HF and/or VHF rigs and six accessories from rig's 12 VDC supply. 35A high-current and 15A accessory binding posts, Voltmeter, on/off switch. Master fuse, RF bypass. 12¹/₂Wx2³/₄Hx2¹/₂D".

MFJ-1116, \$99⁹⁵
Like MFJ-1118 but 15A total, 8 pairs 5-ways. "On" LED, 0-25 VDC voltmeter.

MFJ-1112, \$79⁹⁵
Like MFJ-1116 but 6 pairs 5-way posts, no meter/switch. 12¹/₂Wx2³/₄Hx2¹/₂D".

MFJ-1117, \$94⁹⁵
High-current. Powers four HF/VHF radios simultaneously -- 2 at 35A each, 2 at 35A combined. 8Wx2Hx3D".






MFJ-1129, \$169⁹⁵
10 outlets. Installed fuses: two 1A, three 5A, three 10A, two 25A, one 40A. Outlets 1, 2, 4-8 are *PowerPoles*^(R). Outlet 3 is a 35A high current post, outlet 9, 10 are 15A posts. Switch, voltmeter. 12¹/₂Wx1¹/₄Hx2¹/₂D".

MFJ-1128, \$159⁹⁵
12 fused *PowerPoles*^(R), three 1A, four 5A, four 10A, one 25A, one 40A. Switch, Meter.

MFJ-1126, \$129⁹⁵
8 fused *PowerPoles*^(R): a 1A, three 5A, two 10A, one 25A, one 40A. Switch, Voltmeter. 9Wx1¹/₂Hx2³/₄D".

MFJ-1124, \$109⁹⁵
4 pairs 35A *PowerPoles*^(R), 2 pairs 35A high current posts.



MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759

Phone: (662) 323-5869 • **Tech Help:** (662) 323-0549 • **FAX:** (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. (c) 2024 MFJ Enterprises, Inc.

• 1 Year No Matter What™ warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ





Antenna Application and Innovation!

The ARRL Antenna Book

in its 25th edition is the ultimate reference for antennas, transmission lines, and propagation. It includes everything you need to construct your own antenna system, and provides useful advice on selecting, designing, building, testing, and installing antenna systems for every band.

Major Topics:

- Antenna Fundamentals
- Basic Antenna Types and MF and HF Antennas
- VHF, UHF, and Microwave Antennas and Specialty Applications
- Transmission Lines and Systems and Building and Maintaining Antenna Systems

New Projects:

- Set of HF OWA and 50 MHz OWA Yagi designs
- Slot antennas
- Portable satellite antennas
- Portable antenna systems for POTA and SOTA
- Transmitting chokes for VHF/UHF350 supplemental articles and projects.



Includes eBook! Download the fully searchable digital edition of the printed book, as well as nearly 350 supplemental articles and projects.

The ARRL Antenna Book, Hardcover Edition
ARRL Item No. 1755 | Retail \$79.95



NEW!

Hardbound in black finish with silver foil embossing, this limited edition is the perfect companion to ***The ARRL Handbook*** 100th hardcover collector's edition.

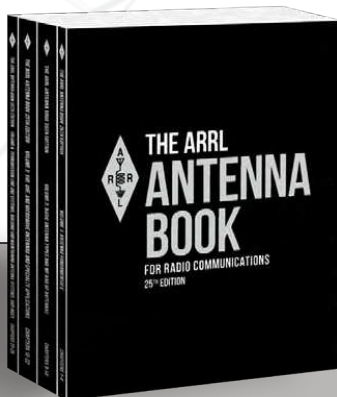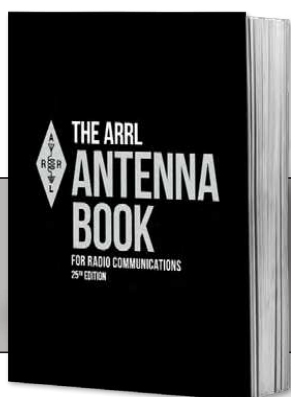

Softcover and four-volume Antenna Book also available.
Retail \$69.95 each

Order online at www.arrl.org/shop | Call toll-free US 1-888-277-5289

MFJ

G5RV Antennas

Operate all bands 10 thru 160 Meters with a single wire antenna!



MFJ-1778 The famous G5RV antenna is the most popular ham radio antenna in the world! It's an efficient, all band 102 foot long antenna --

shorter than an 80 Meter dipole. Has 32.5 foot ladder line matching section ending in

SO-239 connector for your coax feedline.

Use horizontally or as Inverted Vee or Sloper with just one support. 1500 Watts.

Operate all bands 80-10 Meters with an antenna tuner and even 160M with ground.

Fully assembled with ceramic end and fiberglass center insulators. *Hang and Play™* -- add coax, rope to hang and you're on air!

MFJ-1778M, \$79.95. Half-size, 52 foot G5RV JUNIOR for limited space. 40-10 Meters with tuner. Full 1500 Watts.

MFJ All Band Classic Doublet

MFJ 102 foot all band doublet covers 160-6 Meters with balanced line tuner. Super strong custom fiberglass center insulator relieves stress on 100 foot ladder line.



MFJ-1777 \$129.95

Glazed ceramic end insulators. 1500 Watts.

RF Isolator

MFJ-915 RF Isolator

MFJ-915 \$49.95 prevents unwanted RF from traveling on the outside of your coax shield into your transceiver. This unwanted RF can cause painful RF "bites" when you touch your microphone or volume control, cause your display or settings to go crazy, lock up your transceiver or turn off your power supply. In mobile installations, stray RF could cause your car to do funny things even blow your car computer. Clear up these problems, plug an MFJ-915 between your antenna and transceiver.

1.8-30 MHz, 1500 Watts. 5x2 inches. **MFJ-919, \$84.95.** 4:1 current balun, 1.5 kW. **MFJ-913, \$49.95.** 4:1 balun, 300 Watts.



True 1:1 Current Balun & Center Insulator



MFJ-918 True 1:1

\$49.95 Center Balun/

Current Insulator

forces equal radiator currents in dipoles for true dipole radiation pattern. Reduces coax radiation and field pattern distortion -- your signal goes where you want it. Reduces TVI, RFI and RF hot spots. *Don't build a dipole without one!* 50 hi-permeability ferrite beads on high quality RG-303 Teflon[®] coax and Teflon[®] SO-239. 1.5kW 1.8-30 MHz. Stainless steel hardware. 14 gauge stranded copper wire is directly connected to your antenna. 5x2 inches. Heavy duty weather housing.

2-Position Antenna Switch

MFJ-1702C, \$69.95. 2-position antenna switch, lightning surge protection, center ground. SO-239s.

Lightning surge protectors. MFJ-270, \$27.95. 400W. **MFJ-272, \$37.95.** 1500 W. Gas discharge tube shunts 5000 amps peak < 0.1 dB loss. 1 GHz. SO-239s.

MFJ-16C06, \$9.95. 6-pack glazed ceramic end/center ant. insulators.

MFJ-16B01, \$24.95. Molded high-strength center insulator. SO-239.

MFJ-16D01, \$9.95. 450 Ohm fiberglass end/center insulator with ladder line stress relief and SO-239 mount.

MFJ-18H100, \$69.95. 100 feet, 450 Ohm ladder line, 18 gauge copper clad.

80-10 Meter End-Fed Half Wave antenna

Cover all HF bands with one single wire and no tuner!

MFJ-1982HP, \$129.95



No tuner needed!

All band 80-10M EFHW antenna

Get-on-the air on all bands 80-10 Meters with just one wire and one support (pole or tree) and no tuner or long counterpoise.

Installs anywhere in minutes! Rugged insulated-wire radiator prevents detuning when contacting limbs/branches. "No-sag" end insulator slides over branches, leaves.

Toss over a high limb for inverted-V or sloper or go vertical with an inverted-L.

Dark jacketed wire is virtually invisible -- *don't let antenna restrictions keep you off the air!* Great for emergencies.

EFHWs naturally resonate on the 1/2-wave fundamental frequency and odd/even harmonics. Covers 80/40/30/20/17/15/12/10 Meters without traps, stubs or resonators.

Broad-band matching transformer at feed point gives SWR so low you may

never need a tuner. Compensating inductor optimizes SWR. 800 Watts SSB/CW. 132 feet jacketed antenna wire.

More 80-10 Meter Models

MFJ-1982MP, \$99.95. Like MFJ-1982HP but handles 300 Watts.

MFJ-1982LP, \$89.95. Like MFJ-1982MP but handles 30 Watts.

EFHW 40-Meter Models

MFJ-1984HP, \$109.95. Like MFJ-1982HP but 40-10M. 66 feet jacketed wire.

MFJ-1984MP, \$89.95. Like MFJ-1982HP, but handles 300 Watts.

MFJ-1984LP, \$79.95. Like MFJ-1982MP, but handles 30 Watts.

Dual Band Dipoles



MFJ-17758 \$129.95
80/40 Meters

MFJ-17758, \$129.95. Operate 80/40 Meters with a short 85 foot dipole. Full-size on 40 Meters

with ultra-efficient end-loading on 80 Meters. 1500 Watts. Super-strong custom molded center insulator with SO-239 connector and hang hole. Ceramic end insulators. 7-strand, 14 gauge hard copper wire. *No tuner needed!*

MFJ-17754, \$89.95. Like MFJ-17758 but is only 42 feet. Operate 40/20 Meters. Full-size on 20 Meters, ultra-efficient end-loading on 40 Meters. 1500 Watts.

Single Band Dipoles



MFJ-1779A \$99.95
160M, 265 ft.

MFJ-1779B \$79.95
80-40M, 135 ft.

MFJ-1779C \$59.95
20-6M, 35 ft.

Ultra high quality center fed dipoles give years of trouble-free service.

Custom injection-molded UV-resistant center insulator has built-in SO-239 and hanging hole. Glazed ceramic end insulators. 7-strand, 14-gauge hard copper antenna wire. 1500 Watts. Use horizontally or as sloper or inverted vee. Simply cut to length with provided cutting chart.

OCFD Dipoles



MFJ-2012 \$109.95
1500 Watts

MFJ-2010 \$89.95
300Watts

No tuner needed! MFJ

Off-Center Fed Dipoles use

MFJ's exclusive *ExactRatio™*

RF broadband transformer to

give low SWR and maximum

bandwidth on 40/20/10/6 Meters. A

Guanella current balun kills feed-

line radiation, pattern distortion,

SWR shifts, RFI and noise pickup.

Install anywhere and get the same

predictable performance regard-

less of feedline length. You get ground rein-

forced gain over verticals. Use horizontally,

inverted vee, sloper. 98% efficient, 14 gauge,

7-strand copper wire, ceramic end insulators.

MFJ

MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759

Phone: (662) 323-5869 • **Tech Help:** (662) 323-0549 • **FAX:** (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. (c) 2024 MFJ Enterprises, Inc.

• 1 Year No Matter What™ warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ

VISA

MasterCard

Discover

Paycom

PayPal

f

t

in USA



GREEN HERON ENGINEERING LLC

RT-21 DIGITAL ROTATOR CONTROLLERS

Unmatched Performance for any Rotator

**See us at Hamvention®
Booths 3103, 3203**



NEW!

RT-21 Rotator Packages

- RT-21 with Yaesu & M2 Orion Rotators

RT-21 internal Wi-Fi Option

- Control your rotator from ANYWHERE using a web browser

WIRELESS NETWORK CONTROLS

- Internet access for switches and rotators
- Eliminate cables and tethered control boxes
- Create customized on-screen controls
- Great circle maps




GH Everywhere Base and Remote



- USB and wireless relay controls
- Options: outdoor enclosures and external antennas

Select-8 Wireless Remote Coax Switch

- Built-in GHE Wireless
- Powered through the coax
- Tower leg Mount
- Amphenol RF connectors



Select-8
Tri-Bander
40 Meter Beam
40 Meter Dipole
75 Meter Vert.
80 Meter Dipole
10 Meter 5 El
160 Meter "Y"
Dummy Load

www.greenheronengineering.com

(585) 217-9093

Filters

Ham - Commercial - Band Pass

www.ocicom.com

Master Digital Radio Easily, Connect More, Stay Prepared

with BridgeCom's Plug and Play Package


Pre-programmed and ready to go right out of the box! Be on the air in under 10 minutes!

The package also comes with free access to BridgeCom University which has hundreds of videos and tons of information that will teach you the ins and outs of your radio allowing you to take your ham radio journey to the next level!

BridgeCom SYSTEMS

Use code "PNP25" at checkout to get \$25 off the Plug and Play Package! Head over to bridgecomsystems.com to check it out!

Get Started in POTA!

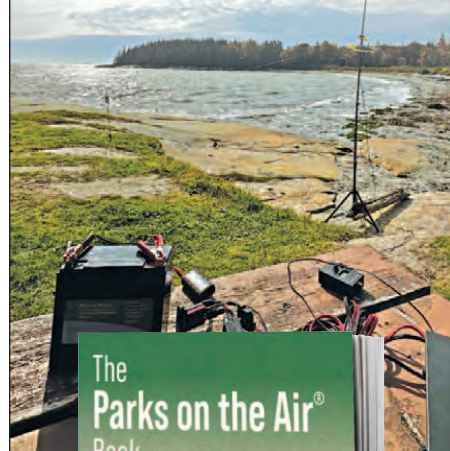

Think outside the shack!
You never know what exciting adventure awaits. Fresh air, beautiful scenery, wildlife, and new friends are waiting for you.

Topics Include:

- Multi-park roves
- QRP operation
- Satellite operation
- Surefire wire antennas
- Activating urban parks
- CW and POTA

Parks on the Air® Book

Item No. 1748 | Retail \$22.95


Member Price \$19.95

www.arrrl.org/shop



ARRL

The National Association for Amateur Radio®



“Best thing since sliced bread!”

More hams use MFJ analyzers than all others in the world!

MFJ-259D . . . World's Most Popular Antenna Analyzer!



MFJ-259D **New and improved, now covers 280 KHz-230 MHz!**

World famous MFJ-259D gives you a complete picture of your antenna's SWR and Complex Impedance.

MFJ-259D is a complete ham radio test station including frequency counter, RF signal generator, SWR Analyzer™, RF Resistance/Reactance Analyzer, Coax Analyzer, Capacitance/Inductance Meter and more!

Read Complex Impedance as series resistance and reactance ($R+jX$) or as magnitude (Z) and phase

(degrees).

Determine velocity factor, coax cable loss in dB, length of coax and distance to short/open.

Read SWR, return loss and reflection coefficient at any frequency simultaneously.

Read inductance (μH) and capacitance (pF) at RF frequencies.

Large easy-to-read two line LCD screen and side-by-side meters clearly display your information.

Built-in frequency counter, Ni-MH/Ni-CD charger circuit, battery saver, low battery warning, smooth reduction

drive tuning.

Super easy-to-use! Just set the bandswitch and tune the dial -- just like your transceiver. SWR, Complex impedance displayed instantly!

Fully portable, take it anywhere -- remote sites, up towers, on DX-peditions. Use 10 AA or Ni-Cad or Ni-MH batteries (not included) or 110 VAC with MFJ-1312D, \$19.95. Rugged metal cabinet, 4x2x6 3/4".

MFJ-249D, \$329.95.

MFJ-249D does everything MFJ-259D does with digital display only.



MFJ-269D . . . 280 KHz - 230 MHz plus 415-470 MHz, 12-bit A/D

New and improved. Now covers 280 KHz to 230 MHz and 415 to 470 MHz and 2200 Meter band!

Instantly gives you a complete picture of your antenna.

Read SWR, return loss, reflection coefficient, match efficiency at any frequency simultaneously.

Read Complex Impedance (100 KHz to 230 MHz) as series equivalent resistance and reactance (R_s+jX_s) or as magnitude (Z) and phase (degrees). Also reads parallel equivalent resistance and reactance (R_p+jX_p).

Determine velocity factor,

MFJ-269D **\$449⁹⁵**

coax loss in dB, length of coax and distance to short or open in feet (it's like a built-in TDR).

Coax Calculator™ calculates coax line length in feet given degrees and vice versa for any frequency, velocity factor.

Measure



SWR and loss of coax with any characteristic impedance (280 KHz to 230 MHz) from 10 to over 600 Ohms.

Measures inductance in μH and capacitance in pF at RF frequencies, 100 KHz to 230 MHz.

High contrast LCD gives precision readings and two side-by-side analog meters make antenna

adjustments smooth and easy.

12-bit A/D converter gives much better accuracy and resolution than common 8-bits -- **MFJ-269D exclusive!**

Built-in frequency counter, battery saver, low battery warning, Ni-MH/NiCd charge circuit. 4Wx2Dx6 3/4", 2 lbs. Use ten aA batteries or 110 VAC with MFJ-1312D, \$19.95.

MFJ-269DPRO™ SWR Analyzer

MFJ-269DPro, \$519.95. Like MFJ-269D, but UHF range covers **430 to 520 MHz**. For commercial work.



MFJ-223 1-60MHz Color Graphic VNA Analyzer

Pocket-sized Color VNA Analyzer has a vivid TFT multi-color display and covers 1-60 MHz. Get data for SWR, resistance, reactance, and impedance magnitude.

Continuous DDS frequency coverage with 100 Hz resolution. Full selection of tuning steps and sweeps. Movable marker calls up alpha-numeric data for any point on any plot -- memory captures current data when analyzer is off. Single and Swept frequency operating modes, truly accurate SWR, R, X, Z measurements, seamless DDS coverage, smooth skip-free encoder tunes fast or slow, powerful +5-dBm stimulus generator overrides interference, vivid 1600-pixel/inch color graphics on 2x2" non-glare TFT. Built-in lithium battery.



MFJ-223 **\$399⁹⁵**

MFJ-225 1.5-180MHz continuous Two-Port Graphic Analyzer

Out in the field, the MFJ-225 is a compact completely self-contained handheld graphing analyzer. On the bench it becomes a full-fledged two-port (S21) desktop machine when teamed up with your PC. Using powerful IG-miniVNA freeware, you'll run de-tailed data analysis and print out stunning color-graphic plots to document your work! Built-in back-lighted 3-inch LCD graphic display. Make fine adjustments using full-screen easy-to-view SWR bar-graph, capture vivid swept displays for SWR, impedance, re-turn loss, phase angle, more. DDS generator.



MFJ-225 **\$399⁹⁵**

SWR Analyzer Accessories

A. MFJ-29D/MFJ-39D, \$39.95. Carrying Pouch for MFJ-259D/269D.

B. MFJ-92AA10, \$59.95. 10-Pk 2500 mAh Ni-MH Supercells.

C. MFJ-66C, \$59.95. Dip coils, set of two covers 1.8-230 MHz.

D. MFJ-731, \$134.95. Tunable Analyzer Filter, 1.8-30 MHz, for strong RF fields.

E. MFJ-917, \$39.95. 1:1 Current balun for SWR Analyzers to test balanced line antennas, other loads.

F. MFJ-7737, \$8.95. PL-259 to BNC Female.

G. MFJ-7727, \$9.95. PL-259 to SMA Female.

H. MFJ-5510C, \$19.95. 12VDC cigarette lighter adapter.



MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759

Phone: (662) 323-5869 • **Tech Help:** (662) 323-0549 • **FAX:** (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. (c) 2023 MFJ Enterprises, Inc.

• 1 Year No Matter What™ warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ





GET ON THE AIR WITH AN **END-FED** **HALF-WAVE** **ANTENNA!**



*It's easy to build
and deploy!*



Get ready to drill, fasten, and solder
with this four-band End-Fed Half-Wave Antenna Kit.
This antenna kit is popular with portable operators,
and works on 10, 15, 20, and 40 meters.

www.arrl.org/shop

ARRL Item No. 0612 | Retail \$79.95

Born in the U.S.A.!!

Buy American! MFJ automatic tuners are built on American soil by American workers right here in Starkville, Mississippi USA.

MFJ IntelliTuner™ Automatic Tuners

The MFJ-993B IntelliTuner™ lets you tune any antenna *automatically* -- *ultra fast*.

It's a comprehensive automatic antenna tuning center complete with SWR/Wattmeter, antenna switch for two antennas, wire connection and 4:1 current balun for balanced lines.

MFJ's exclusive IntelliTuner™, Adaptive Search™ and Instant Recall™ algorithms give you *ultra fast* automatic tuning with over 20,000 VirtualAntenna™ Memories.

You get a highly efficient L-network, 6-1600 ohm matching at 300 Watts SSB/CW and digital or extra-wide 6-3200 Ohm matching at 150 Watts SSB/CW and digital, 1.8-30 MHz coverage, Cross-Needle and digital meters, audio SWR meter, *backlit* LCD, remote control port, radio interface, heavy-duty 16 amp/1000V relays. MFJ-993B automatically tunes for minimum SWR and remembers your frequency and tuner settings. The next time you operate on that frequency and antenna, these tuner settings are instantly restored and *you're ready to operate in milliseconds!* 10Wx2¾Hx9D inches. Use 12-15 VDC/1 amp or 110 VAC with MFJ-1316, \$29.95. Radio interface cables, remote control available. See www.mfjenterprises.com

MFJ-993B
\$329⁹⁵



600 Watt MFJ Automatic Antenna Tuner

MFJ-994B, \$419.95. Like MFJ-993B but handles 600 Watts SSB/CW/Digital, matches 12-800 Ohms. 10,000 memories. Doesn't have LCD, antenna switch, balun, audio SWR meter. 10Wx2¾Hx9D inches.

More hams use MFJ tuners than all other tuners in the world!

World's most advanced Automatic Antenna Tuners feature world renowned MFJ AdaptiveSearch™ and AutomaticRecall™ algorithms -- world's fastest ultra-wide range tuning. Nine World Class models! Choose your features: Digital/Analog/Audio SWR-Wattmeter, Antenna Switch, Balun, Radio Interface, Digital frequency readout, Remoteable, Coax/Balanced Lines/Wire Tuning, Field Upgradeable . . .

1500 Watt Legal Limit for Ameritron AL-1500/1200/82 amps



Roam the entire HF spectrum 1.8- 30 MHz hands-free with full 1500 Watt legal limit on SSB/CW/ Digital and near-perfect SWR! Lighted LCD/Cross-Needle Meter.

MFJ-998
\$769⁹⁵

300 Watt...Wide Range SWR/Wattmeter, 10000 VA Memories



Extra wide matching range at less cost. MFJ's exclusive dual power level: 300 Watts for 6-1600 Ohms; 150Watts for 6-3200 Ohms. Cross-Needle SWR/Wattmeter.

MFJ-991B
\$309⁹⁵

200 Watt ...Compact Digital Meter, Ant Switch, Wide Range



World's fastest compact auto tuner uses MFJ Adaptive Search™ and InstantRecall™ algorithms. 132,072 tuning solutions instantly match virtually any antenna with near perfect SWR. Bright LCD Display.

MFJ-929
\$279⁹⁵

200 Watt MightyMite™ Matches IC-706, FT-857D, TS-50S



200W SSB/CW and Digital. Low-profile automatic tuner is great for those tiny new rigs. Just tune and talk! Includes interface cable, 2-year warranty. 6½Wx2⅞Hx8⅜D".

MFJ-939KIY
\$199⁹⁵

MFJ Remote AutoTuners



Get greatly reduced losses and high efficiencies with long coax runs and high SWR antennas. MFJ-926B, \$299⁹⁵. 200W. MFJ-993BRT, \$399⁹⁵. 300W. MFJ-994BRT, \$499⁹⁵. 600W. MFJ-998BRT, \$949⁹⁵. 1.5 kW.

G5RV Antennas

Cover 160-10 Meters with antenna tuner. 102 ft. long. Use as inverted vee or sloper, 160 Meters as Marconi. 1500 Watts. Super-strong fiberglass center/feedpoint insulators. Glazed ceramic end insulators. MFJ-1778M, \$79.95. 52'. 40-10M.



MFJ-1778
\$89⁹⁵

No Matter What™ Warranty

Protected by MFJ's famous one year No Matter What™ limited warranty. We will repair or replace (at our option) for a full year.



MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759

Phone: (662) 323-5869 • Tech Help: (662) 323-0549 • FAX: (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. (c) 2023 MFJ Enterprises, Inc.

• 1 Year No Matter What™ warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ



MFJ...the World Leader in Ham Radio Accessories!

MFJ Tuners

Ham Radio's Most Popular 300 Watt Antenna Tuner

More hams use MFJ-949E than any other antenna tuner in the world!

Why? Because the world's leading tuner has earned a worldwide reputation for being able to match just about anything.

Full 1.8-30 MHz Operation

Tune your antenna for minimum SWR! Works 1.8-30 MHz on dipoles, verticals, inverted vees, random wires, beams, mobile whips, shortwave receiving antennas... Use coax, random wire, balanced lines. Has heavy-duty 4:1 balun for balanced lines.

Custom inductor switch

Custom designed inductor switch, 1000 volt tuning capacitors, Teflon® insulating washers and proper L/C ratio gives you arc-free

no worries operation up to 300 Watts PEP transceiver input power.

The MFJ-949E inductor switch was custom designed to withstand the extremely high RF voltages and currents that are developed in your tuner.

8-Position Antenna switch

Antenna switch lets you select two coax fed antennas, random wire/balanced line or dummy load through your MFJ-949E or direct to your transceiver.



MFJ-949E \$279.95

Plus Much More!

Full size built-in non-inductive 50 Ohm dummy load, scratch-proof Lexan multi-colored front panel, 10⁵/₈ x 3¹/₂ x 7 inches. Superior cabinet construction and more!

MFJ-948, \$259.95. Econo version MFJ-949E. Has all features except for dummy load.

Lighted Cross-Needle Meter

Full size 3-inch lighted Cross-Needle Meter. Lets you easily read SWR, peak or average forward and reflected power simultaneously. Has 300 Watt or 30 Watt ranges.

QRM-Free PreTune™

MFJ's QRM-Free PreTune™ lets you pre-tune your MFJ-949E off-the-air into its built-in dummy load! Makes tuning your actual antenna faster and easier.

No Matter What™ Warranty

Every MFJ tuner is protected by MFJ's famous one year No Matter What™ limited warranty. We will repair or replace your MFJ tuner (at our option) for a full year.

More hams use MFJ tuners than all other tuners in the world!

MFJ-989D Legal Limit Tuner



MFJ-989D \$539.95

New, improved MFJ-989D legal limit antenna tuner gives you better efficiency, lower losses and a new true peak reading meter. Easily handles full 1500 Watts SSB/CW, 1.8-30 MHz, including MARS/WARC bands. Six position antenna switch, dummy load. New 500 pF air variable capacitors. New improved AirCore™ Roller Inductor. New high voltage current balun. New crank knob. 12⁷/₈W x 6H x 11⁵/₈D inches.

MFJ-986 Two knob Differential-T™



MFJ-986 \$479.95

Two knob tuning (differential capacitor and AirCore™ roller inductor) makes tuning foolproof and easier than ever. Gives minimum SWR at only one setting. Handles 3 KW PEP SSB amplifier input power (1.5 KW output). Gear-driven turns counter, lighted peak/average Cross-Needle SWR/Wattmeter, antenna switch, balun. 1.8 to 30 MHz. 10³/₄W x 4¹/₂H x 15 in.

MFJ-962D Compact kW Tuner



MFJ-962E \$399.95

A few more dollars steps you up to a kW tuner for an amp later. Handles 1.5 KW PEP SSB amplifier input power (800W output). Ideal for Ameritron's AL-811H! AirCore™ roller inductor, gear-driven turns counter, pk/avg lighted Cross-Needle SWR/Wattmeter, antenna switch, balun, Lexan front, 1.8-30MHz. 10³/₄ x 4¹/₂ x 10⁷/₈ in.

MFJ-969 300W Roller Inductor Tuner



MFJ-969 \$319.95

Superb, AirCore™ Roller Inductor tuning. Covers 6 Meters thru 160 Meters! 300 Watts PEP SSB. Active true peak reading lighted Cross-Needle SWR Wattmeter, QRM-Free PreTune™ antenna switch, dummy load, 4:1 balun, Lexan front panel. 10¹/₂W x 3¹/₂H x 9¹/₂D inches.

MFJ-941E Super Value Tuner

Most for your money! 300 Watts PEP, 1.8-30 MHz, lighted Cross-Needle SWR/Wattmeter, 8 position antenna switch, 4:1 balun, 1000 volt capacitors, Lexan front panel. 10¹/₂W x 2¹/₂H x 7D in.

MFJ-941E \$239.95

MFJ-941EK, \$209.95. Tuner Kit -- Build your own!

MFJ-945E HF/6M Mobile Tuner

Extends your mobile antenna bandwidth so you don't have to stop, go outside and adjust your antenna. Tiny 8 x 2 x 6 in. Lighted Cross-Needle SWR/Wattmeter. Lamp and bypass switches. Covers 1.8-30 MHz and 6 Meters. 300 Watts PEP. **MFJ-20, \$14.95**, mobile mount.

MFJ-945E \$189.95

MFJ-971 Portable/QRP Tuner

Tunes coax, balanced lines, random wire 1.8-30 MHz. Cross-Needle Meter. SWR, 30/300 or 6 Watt QRP ranges. Matches popular MFJ transceivers. Tiny 6 x 6¹/₂ x 2¹/₂ in. **MFJ-971 \$179.95**

MFJ-901B Smallest Versa Tuner

MFJ's smallest (5 x 2 x 6 in.) and most affordable wide range 200 Watt PEP Versa tuner. Covers 1.8 to 30 MHz. Great for matching solid state rigs to linear amps. **MFJ-901B \$149.95**

MFJ-902B Tiny Travel Tuner

Tiny 4¹/₂ x 2¹/₄ x 3 inches, full 150 Watts, 80-6 Meters, has tuner bypass switch, for coax/random wire. **MFJ-904H, \$199.95.** Same but adds Cross-needle SWR/Wattmeter and 4:1 balun for balanced lines. 7¹/₄ x 2¹/₄ x 2³/₄ inches.



MFJ-902B \$149.95

MFJ-16010 Random Wire Tuner

Operate all bands anywhere with MFJ's reversible L-network. Turns random wire into powerful transmitting antenna. 1.8-30 MHz. 200 Watts PEP. Tiny 2 x 3 x 4 in. **MFJ-16010 \$109.95**



MFJ-9201 QRPocket™ Tuner

80-10 Meters, 25 Watts. 12 position inductor, tune/bypass switch, wide-range T-network, BNCs. 4W x 2⁵/₈H x 1¹/₂D inches. **MFJ-9201, \$79.95**



MFJ-9201 \$79.95

MFJ-921/924 VHF/UHF Tuners

MFJ-921 covers 2 Meters/220 MHz. **MFJ-924** covers 440 MHz. SWR/Wattmeter. 8 x 2¹/₂ x 3 in. **MFJ-921/924 \$149.95**



MFJ-931 Artificial RF Ground

Eliminates RF hot spots, RF feedback, TVI/RFI, weak signals caused by poor RF grounding. Creates artificial RF ground or electrically places far away RF ground directly at rig. **MFJ-934, \$299.95.** Artificial ground/300 Watt Tuner/Cross-Needle SWR/Wattmeter. **MFJ-931 \$159.95**



MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759

Phone: (662) 323-5869 ■ Tech Help: (662) 323-0549 ■ FAX: (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. ©2023 MFJ Enterprises, Inc.

• 1 Year No Matter What™ warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ



MFJ_949E_092308_QST_120823DS

MFJ POTA helpers

80-10 Meters with single EFHW antenna, no tuner needed!

MFJ-1982MP, \$99.95



- **Get on the air** 80-10 Meters with a single wire EFHW and one center or end support. Fast, easy set-up/take-down for portable use.
- **End-Fed Half-Waves** (EFHW) res-

onate on halfwave fundamental frequency and even harmonics. 80-10 Meters -- no traps, stubs, resonators. Broad-band matching transformer gives you low SWR! No tuner usually needed.

- **No long counterpoise**, radials or feedline required
 - **Nearly invisible**, no-tangle black Teflon insulated radiator wire.
 - **Weather** and U/V resistant. Easy storage and transport.
- MFJ-1982MP, \$99.95.** 300 Watts
Restricted space, 80-10M. 132 ft.
- MFJ-1984MP, \$89.95.** 300 Watts

Restricted space, 40-10M. 66 feet.

MFJ-1982HP, \$129.95. 800 Watts,

high power, 80-10 Meters. 132 feet.

MFJ-1984HP, \$109.95. 800 Watts, high power, 40-10 Meters. 66 feet.

MFJ-1982LP, \$89.95. 30 Watts QRP, 80-10 Meters. 132 feet.

MFJ-1984LP, \$79.95. 30 Watts QRP, 40-10 Meters. 66 feet.

G5RV Antenna

MFJ-1778, \$89.95.

80-10 Meters G5RV is

102 foot wide copper wire,

32.5 feet ladder line center to SO-239.



Premium stainless steel telescopic whips

-- Build collapsible dipoles, mobiles, portable and base antennas. Great for traveling. Rigidly collared at the base, stronger than plated brass, resists rust/corrosion. 16.9/12/10/8/4.5' models available.

MFJ-1979, \$69.95. Most popular! 16.9' ext., 27" collapsed. 10 sect. 20-6M.

MFJ-1936T, \$49.95. Ground rod, 3/8-24 mount, 17' whip, counterpoise.

Continuously tuneable Portable 60-6M Antenna

MFJ-1898, \$149.95.

Get 60/40/30/20/17/15/12/10/6-Meters in one portable continuously tuneable antenna!!! Great

for POTA, SOTA, DXPeditions or just in your backyard. Collapses to 1.25x11.5 inches in two sections. Fully extended it's a whopping 103 inches! Easy to tune.

Tuning section base unscrews to reveal a nifty tuning chart (like a ruler). Handles 125 Watts PEP SSB. Quick and painless band changing.



HF Hamstick Portable Antennas

MFJ-16XXXT, \$22.95-\$29.95. Monoband portable hamsticks make POTA fun & easy! Small, lightweight, efficient, and easy-to-use. Dual center and distributed loading lets you radiate efficiently -- get more power out for working DX and ragchewing. Ruggedly constructed. Heavy duty 4'-3/8" diameter fiberglass rod, .125" diameter PH-17-7 stainless steel whip, chrome plated brass fittings give years of dependability. Adjust whip for lowest SWR. Allen wrench, tuning/matching instructions. 250W. PEP. 7' fully extended, collapses to 4' for easy storage. 6/10/12/15/20/30/40/60/75M. 3/8 x 24 mount.

MFJ-347, \$29.95. Mounts 2 of your favorite hamsticks to make a dipole. Use masts up to 1.25" OD. Isolated dipole elements.



18 foot Telescopic Mast with Tripod

MFJ-1919EX, \$199.95. 18' telescoping fiberglass mast with heavy duty steel tripod. Mast collapses to 5'. Thick 1/8" wall, .75" top, 1.5" bottom. 15 lbs. Braced triangle, non-skid feet.

MFJ-1918EX, \$129.95. Tripod, 9.5' telescoping fiberglass mast. 3.8' collapsed. 6 1/2 lbs.

Tripods Only

MFJ-1921, \$219.95. Giant tripod base spreads to 8'! Supports massive antennas. Adjustable non-skid legs. 14 lbs.

MFJ-1905, \$44.95. Optional foot anchors,

MFJ-1919, \$129.95. Base spreads 4.8'. Supports 100 lbs. 7.8 ft, 9.75 lbs.

MFJ-1918, \$84.95. Base spreads 2.75'. Support 66 lbs. 6.75 lbs.



Telescopic Fiberglass Masts

Pull out sections and lock to extend your antenna way to the sky. Lightweight, Light-Duty or Super-Strong Thick-Wall models, 25-43'. Each collapses for easy-to-carry size for true portability.

MFJ-1910, \$119.95. 33', light duty, has top tie ring for wires.

MFJ-1915, \$159.95. 25 feet, for heavier duty use.

MFJ-1917, \$209.95. 43 feet, heavier duty use, has top tie ring for wires.



MFJ RFI Isolator



MFJ-915, \$49.95. Prevents unwanted RFI from traveling on your coax shield into your expensive transceiver and other electronic equipment. Prevents painful RF "bites" and erratic operation. 1.5 kW. 1.8-30 MHz.

MFJ 4:1 Balun

MFJ-918, \$49.95. True 1:1 current balun/center insulator. High-permeability ferrite beads on RG-303 Teflon[®] coax. 2" dia.x6" long. 14 gauge 7-strand copper wire. 1.5 kW 1.8-30 MHz.



MFJ POTA Antenna Tuners

MFJ-939, \$199.95. Automatic Tuner, 200W Digital/SSB/CW.

20,000 memories, super fast automatic tuning. Includes interface cable, 2-year warranty. Compact 6 1/2"Wx2 7/8"Hx8 3/8"D".

MFJ-945E, \$189.95. 160-6M Manual antenna tuner.

Lighted Cross-Needle SWR/Wattmeter, Lamp/ Bypass switches. 300 Watts. Compact 8Wx2Hx6D inches.



MFJ 30 Amp Power Supply

MFJ-4230MVP, \$159.95.

Ham radio's best seller is just 5Wx2 1/2"H x6D inches, and just 3 pounds. Perfect for home, POTA or for power for your "Go-Box". 25A continuous, 30A surge at 13.8 VDC. Adjusts 4-16 VDC. 120/240 VAC at 47-63 Hz -- worldwide! V/A Meter switch. 75% efficiency, low ripple/noise, <100 mV. Over-voltage/current protections.



HF/VHF SWR Analyzer

MFJ-259D, \$349.95.

World's best selling analyzer covers 280 KHz to 230 MHz, has LCD that reads SWR and impedance or SWR bar-graph, SWR and Impedance analog meters, signal generator, frequency counter.



MFJ-281, \$19.95.

ClearTone[™] Communication speaker, 3" speaker 8W, 8 Ohms, 6' cord, 3.5 mm mono.



MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759
Phone: (662) 323-5869 • Tech Help: (662) 323-0549 • FAX: (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. (c) 2023 MFJ Enterprises, Inc.

• 1 Year No Matter What[™] warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ



Ham Ads

Please contact the Advertising Department at 860-594-0255 or hamads@arrrl.org for further information or to submit your ad.

QST Ham Ads on the Web
Updated Monthly!

www.arrrl.org/ham-ad-listing

Before considering a ham ad please read.

1. Advertising must pertain to products and services which are related to Amateur Radio.

2. The Ham-Ad rate for commercial firms offering products or services for sale is \$2.25 per word. Individuals selling or buying personal equipment: ARRL member 1.00 per word. Non-ARRL member \$1.50 per word. **Bolding** is available for \$2.50 a word. Prices subject to change without notice. You may pay by check payable to the ARRL and sent to: Ham-Ads, ARRL, 225 Main St., Newington, CT 06111. Or, you may pay by credit card sending the information by fax to 860-594-4285 or via e-mail to hamads@arrrl.org. Credit card information needed is: the type of credit card, the exact name that appears on the credit card, the credit card number, the expiration date and the credit card billing address.

3. Closing date for Ham-Ads is the 15th of the second month preceding publication date. No cancellations or changes will be accepted after this closing date. Example: Ads received December 16th through January 15th will appear in March QST. If the 15th falls on a weekend or holiday, the Ham-Ad deadline is the previous working day. Please contact the Advertising Department at 860-594-0255 or hamads@arrrl.org for further information or to submit your ad.

4. No Ham-Ad may use more than 200 words. No advertiser may use more than three ads in one issue. Mention of lotteries, prize drawings, games of chance etc is not permitted in QST advertising.

The publisher of QST will vouch for the integrity of advertisers who are obviously commercial in character and for the grade or character of their products and services. Individual advertisers are not subject to scrutiny.

The American Radio Relay League does not discriminate in its advertising on the basis of race, color, religion, age, sex, sexual orientation, marital status or national origin. ARRL reserves the right to decline or discontinue advertising for any other reason.

AN IMPORTANT NOTICE TO ALL HAM AD POSTERS AND RESPONDERS, FROM THE ARRL ADVERTISING DEPARTMENT Greetings from ARRL HQ! Please note that we have received reports from many ARRL members who have placed classified ads in these listings, and have received responses from individuals proposing "creative" payment schemes. These particular instances involved offers of over-payments for goods by bank check, followed by instructions to deduct the cost of your item from the overpayment, and to transfer the overage back or to another individual. This is a well-known scam. Unfortunately, we have no control over this and other scams of this type. Once your email address is posted, you are vulnerable to those individuals seeking to provide you with questionable information.

Club/Hamfests/Nets

CW INSTRUCTION via internet video conference classes. VISIT longislandcwclub.org

Emergency Ham Net - Forming a new group, free membership. Have fun and push the frontiers of digital radio. www.emergencyham.net

Friend of BILL W meets Thur on 14.316 @ 12:30 ET. Daily Meeting on QSO NET on 21.350 @ 11:30 Eastern Time. More info please visit HAAM Group website www.qsl.net/haam.

SOCIETY OF WIRELESS PIONEERS - Professional brass pounders on land, sea, and air from the time of spark to solid state preserved photos, stories, schematics, letters, cartoons, catalogs, books, and manuals to keep radio history alive. Website showcases **early ham stations**, naval communications history, SOS events, and more, all free. www.sowp.org

Property/Vacation/Rentals

A CARIBBEAN SAINT KITTS "V4" DX RENTAL. See V47JA on QRZ.com and email: W5JON@sbcglobal.net for Ham Discount information. John W5JON/V47JA

A DX Apartment available in VP9 with rigs and antennas. Email: ed@vp9ge.com for details.

Beautiful outdoor Idaho! Spacious low populated areas. Abundant recreation opportunities. Moderate four season climate. Thinking of buying or selling? Contact Ron Bishop, W7IM, Keller Williams Realty Boise. 208-870-6075. Ron@BoiseBargains.com

CAPE COD real estate for hams, buy or sell, John Strome, KC1MLR, ColdwellBanker associate, john.strome@nemoves.com, 508-527-0499

COLORADO CHALET with ham gear for weekly rental, www.lostcreekcabin.com. WØLSD, Buena Vista, CO.

Hams Looking to purchase or sell real estate in Connecticut? Please contact Licensed Ham and Realtor, Claude Cousins, Sr. N1QAE, Berkshire Hathaway Home Services, clauddecous@gmail.com, 860-989-2113

Retiring to Florida? Looking for a resort-like, award winning 55+ active adult community with a vibrant, active Amateur Radio Club with three community repeaters? Contact WB8ZNL, Doug Bennett, Realtor - Arista Realty Group, for more information. 317-418-4273

www.peidxlodge.com

Antique/Vintage/Classic

6 Meter legacy by K6EDX K6MIO. www.bobcooper.tv

ANTIQUE WIRELESS ASSOCIATION - the largest international organization for historic radio enthusiasts. Publishes the quarterly AWA Journal and annual AWA Review on all aspects of collecting and history of communications. AWA produces the famous annual AWA Convention and sponsors the world renowned Antique Wireless Museum. Only \$35/year USA, \$40/year elsewhere. Antique Wireless Association, PO Box 421, Bloomfield, NY 14469. Website: <http://www.antiquewireless.org>

Awesome Technology & Stem Museum - www.cyberengineer.info

Six Decades of Amateur Radio www.kk4ww.com

Vintage Radio, Ham Radio and Military Radio Repair. www.mcveyelectronics.com 845-561-8383

WANTED PRE-1980 MICROCOMPUTERS for historical Museum www.kk4ww.com

QSLCards/Call Sign Novelties

Flaunt your call! www.HAMFLAGS.com

Get Top Quality Full Color UV Coated QSL Cards direct from the printer. Chester QSL Cards by Chester Press. Call 800-748-7089 for samples, email info@chesterpressinc.com or visit the chesterpressinc.com/QSL website.

www.QSLCONCEPT.com Custom designed QSL Cards. FREE Design, FREE Shipping, FREE Stock Photo.

General

RF CONNECTORS & GADGETS

Parts - Products - More
www.W5SWL.com

#1 AMATEUR CALLSIGN DVD! HamCall contains over 2,400,000 world-wide callsigns, 10,400,000 archive callsigns. Supported by most logging programs. Six FREE monthly internet updates and HamCall.net Gold online access included. Visa/MC/Discover 800-282-5628 <http://hamcall.net>

ATTENTION YAESU-FT 10218,000hrs, 30yrs, 800+ FT-102's Repaired. Have every part. AM-FM/board. \$25/hr. Parts@cost. Relays lifetime warranty. 954-961-2034 NC4L www.w8kvk.com/nc4l

Build your own Yagi! - W5EES.COM

GAIN the EDGE with NARTE Certification - NARTE gives you the competitive edge with individual certification in Electromagnetic Compatibility, Electromagnetic Discharge Control and Telecommunications. Industry-recognized certification required or desired by more than 400 corporations nationwide. Call 1-800-89-NARTE or visit www.inarte.org. NARTE offers the premier EMC/EMI, ESD, Telecommunications and Wireless certification to professional technicians and engineers.

Get the F.C.C. "Commercial" Radiotelephone License: The highest-class Telecommunications Certification! Fast, inexpensive, Guaranteed Home-Study. Command Productions. Please visit: www.LicenseTraining.com (800) 932-4268

HAM KITS for sale at www.HeckKits.com L/C Meter, SWR Bridge, ESR Meter, 2-Tone Gen, FET DIP Meter.

ISOTRON ANTENNAS FOR 160 - 6 METERS! Efficient, rugged and resonant. Please visit WWW.ISOTRONANTENNAS.COM. wd0eja@isotronantennas.com 719/687-0650.

KB6NU'S "NO NONSENSE" LICENSE STUDY GUIDES have helped 1000's get their first license and upgrade to General or Extra. They can help you, too. KB6NU.COM/STUDY-GUIDES/

Kenwood HF Radio TS-440S plus power supply PS50. \$300.00 or B/O. 904-607-8076, N4CSD

MicroLog-By-WA0H .. Easy to use logging program .. Free download .. www.wa0h.com

PRINTED CIRCUIT BOARDS for projects shown in QST, QEX, HR, ARRL HB, 73 and more. Custom boards available. FAR Circuits, 18N640 Field Ct, Dundee, IL 60118; fax/phone 847-347-2432; www.farcircuits.net; mail@farcircuits.net

Radio Shack HTX-100 Repair. Free Estimates. KA1HVR - www.HTX-100.com

RF SUPERSTORE

Connectors, Adapters, Antennas, Coaxial Cable and more!

High Quality, Low Cost, Ham Friendly
WWW.RFSUPERSTORE.COM

Rohn Tower, telescoping poles, tripods and antenna parts delivered to your door.


www.antennapartsoutlet.com

Science Hall of Fame Dedicated to promoting Ham Radio in classrooms. www.SciHall.com AB5L

Tactical Portable Accessories for Yaesu 450D, DX-10, 817ND, 857D, 897D, 891, 991A, ICOM 7300, 7200, 7000, 706/703 and 9700. W0MSN www.portablezero.com

Universal Aluminum push up towers. Same day shipping. www.antennapartsoutlet.com

Xcellent **Amateur** and **Monitor Logging** from DXtreme! Click www.dxtreme.com

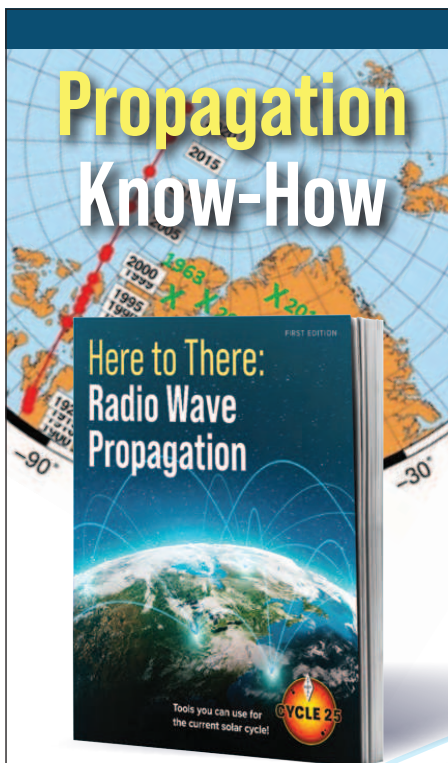

Learn more about what's going on in the ionosphere and how it impacts operating. Understanding conditions and how to predict them will improve your time on the air.

Topics Include:

- Fundamentals of Radio Wave Propagation
- The Sun and Solar Activity
- Sky-Wave, or Ionospheric, Propagation
- VHF and UHF Non-ionospheric Propagation
- Propagation Predictions for HF Operation
- VHF and UHF Mobile Propagation

Here to There:
Radio Wave Propagation
Item No. 1731 | Retail \$22.95
Member Price \$19.95

www.arrl.org/shop



ARRL
The National Association for
Amateur Radio®



Schulman Auction

ESTD 2006



Schulman Auction is your one-stop solution for buying and selling amateur radio equipment.

Through targeted marketing of our carefully curated auctions, we consistently achieve market value (or more) for sellers - and reliable equipment packed and shipped professionally, for buyers.

"By hams, for hams" - and we can help you, too!

For more information, call or email us today.

David Schulman, WDØERU
816-455-5520 or 913-568-3767
david@schulmanauction.com

Tigertronics *SignalLink™* USB

When it comes to sound card interfaces, nothing beats the *SignalLink USB's* combination of performance, value, and ease of use! Whether you're new to Digital operation, or an experienced user, the *SignalLink USB's* built-in sound card, front panel controls, and simplified installation will get the job done right the first time—and without breaking the bank! The *SignalLink USB* supports virtually all sound card digital and voice modes, and works with virtually all radios. It is fully assembled (**made in the USA!**) and comes complete with printed manual and all cables. Visit our website today and see what all the buzz is about!

Operate the WSJT-X FT8 mode plus most other sound card modes including VARA, PSK31, RTTY, SSTV and CW to name a few!



(800) 822-9722
(541) 474-6700

Order your *SignalLink* today at
www.tigertronics.com

Tigertronics 154 Hillview Drive Grants Pass, Oregon 97527

- Highest Gain
Proprietary Design
Improvement
- Lowest SWR
Verified In *CQ Magazine*
- Wider Bandwidth
- Lifetime Guarantee
- Everything You Need
for a Fully Functional
Antenna



VHQHEX.COM
THE KING OF HEX BEAMS

sales@vhqhex.com Tel 603-731-7935 Fax 603-784-5036

www.arrl.org QST April 2024 125

CHATT RADIO

1.833.456.4673
We Are Your One Stop Radio Shop

Dual Band 2M/440 and other models
 EmComm, Satellite work, long distance simplex and repeater use.

Elk Antennas
 Log-Periodic Antennas for the Radio Amateur
 Jim@ElkAntennas.com
 www.ElkAntennas.com


Still Struggling With Your 20-Year-Old Repeater Controller?

More Power, More Features Less Money
State-of-the-Art Repeater Controllers and Accessories

 Aurora, OR 97002 (503) 678-6182
 www.arcomcontrollers.com

HF WIRE ANTENNAS
BULLET™ End Feds with WARC bands, Loop, Z56BKW, Off Center Fed antennas from QRP to Kilowatts. Termination Resistors for BBTD, T2FD.
Baluns/Ununs/Hybrid Combo—100 to 5 KW, 100 KHz-180 MHz for all antenna types
Coax Noise Filters, Line Isolators, Feed Line Chokes—keep RFI and noise off your coax!
On-line Tutorials for antenna selection, design and installation—Download free RFI tip sheet
Palomar-Engineers®.com
760-747-3343



Advertising Department

Janet Rocco, W1JLR, Advertising Sales Manager
 Toll Free: 800-243-7768
 Fax: 860-594-4285
 E-mail: ads@arrl.org
 Web: www.arrl.org/ads

QST Index of Advertisers

ABR Industries™ – www.abrind.com	112
Advanced Specialties – www.advancedspecialties.net	114
Air Boss Antenna Launcher – www.olahtechologies.com.....	114
Ameritron – www.ameritron.com	17
Arcom Communications – www.arcomcontrollers.com	126
ARRL – www.arrl.org	26, 108, 112, 116, 118, 120, 125
ARISS - www.ariss.org.....	114
Bioenno Power – www.bioennopower.com	108
bhi Ltd. – bhi-ltd.com	112
BridgeCom Systems – www.BridgeComSystems.com	118
California Peripherals & Components, Inc. – www.Californiapc.com..	108
ChattRadio – www.chattradio.com.....	126
Communication Concepts, Inc. – www.communication-concepts.com...	127
Cushcraft – www.cushcraftamateur.com.....	2
Dayton Hamvention® – www.hamvention.org	6
Diamond Antenna – www.diamondantenna.net.....	8
DX Engineering – www.DXEngineering.com	25, 27
Elecraft – www.elecraft.com	19
Elk Antennas – www.ElkAntennas.com.....	126
FlexRadio Systems – www.flex-radio.com	21
Green Heron – www.greenheronengineering.com	118
Ham Ads – www.arrl.org/ham-ad-listing	124
Ham Radio Outlet – www.hamradio.com	106, 107
Hammond Mfg. Co. – www.hammondmfg.com.....	114
Hy-Gain – www.hy-gain.com	10
ICOM America – www.icomamerica.com	23
Intuitive Circuits, LLC – www.icircuits.com	114
K6IOK – www.k6iok.com	114
Kenwood Communications – www.kenwoodusa.com.....	29, Cover 4
LDG – 410-586-2177.....	22
MFJ Enterprises – www.mfjenterprises.com	12, 109, 111, 113, 114, 115, 117, 119, 121, 122, 123, 128
Mosley Electronics – www.mosley-electronics.com.....	126
NCG Company – www.natcommgroup.com.....	3
OCI-Olds Communications Inc. – www.ocicom.com.....	118

Member Services Contact Information:

Toll Free: 888-277-5289
 Fax: 860-594-0303
 E-mail: circulation@arrl.org
 Web: www.arrl.org

Pacific Antenna – www.qrpkits.com	127
Palomar Engineers – www.Palomar-Engineers.com	126
Penta Laboratories – www.pentalabs.com	127
PreciseRF – http://preciserf.com	11
PreppComm – www.preppcomm.com	114
RF Parts Company – www.rfparts.com	127
RT Systems – www.rtsystems.com	108
Schulman Auctions – www.schulman-auctions.com	125
Starlink® RV Pole Kits – www.hitched4fun.com	112
SteppIR Communications Systems – www.steppir.com	7
Tac-Comm – www.tac-comm.com	114
Ten-Ten International Net, Inc. – www.ten-ten.org	112
Tigertronics – www.tigertronics.com	125
Timewave Technology, Inc. – www.timewave.com	110
VHQHEX.com. – www.vhqhex.com	125
W5SWL Electronics – www.w5swl.com	108
West Mountain Radio – www.westmountainradio.com	18
Yaesu USA – www.yaesu.com	1, Cover 2

TUBES

- 100% Tested
- 1-year Warranty
- Matched Groups

800-421-4219 (ext 119)
www.PentaLabs.com

Fun and affordable kits from
Pacific Antenna

See our selection of quality Kits starting at \$5
www.qrpkits.com

COAX WIRE

FLEXIBLE

TC-12 - 10.7 ohm
 TC-18 - 17.1 ohm
 TC-20 - 18.6 ohm
 TC-22 - 21.7 ohm
 TC-24 - 26.8 ohm
 SM250-50 50 ohm

SEMI-RIGID

UT-141C-25 25 ohm
 260-4118-0000 25 ohm

RF TRANSFORMERS
2—54MHz

RF400 RF600 RF800 RF1000 RF2000

Type "U"
2 to 300MHz

Communication Concepts, Inc.

508 Millstone Drive, Beaver Creek, OH 45434-5840
 Email: cci.dayton@pobox.com
www.communication-concepts.com
 Phone (937) 426-8600
Established in 1979

From **MILLIWATTS**
 To **KILOWATTS** SM

In Stock Now!

Semiconductors for Manufacturing and Servicing Communications Equipment

• RF Modules
• Semiconductors
• Transmitter Tubes

Se Habla Español • We Export

Phone: 760-744-0700

Toll-Free: 800-737-2787
 (Orders only) **800-RF PARTS**

Website: www.rfparts.com

Fax: 760-744-1943
888-744-1943

Email: rpf@rfparts.com

RF PARTS COMPANY

MFJ Weather-Proof Window Feedthrough Panels

Weather-proof window feedthrough panels bring HF/VHF/UHF antennas, balanced lines, random wire antennas, ground, DC/AC power and Rotator/Antenna Switch Cables into your ham shack without drilling through walls!



Inside View



Outside View

MFJ Weather-Proof Window Feedthrough Panels mount in your window sill. Lets you bring all your antenna connections into your ham shack without drilling holes through walls.

Simply place in window sill and close window. One cut customizes it for any window up to 48 inches. Use horizontal or vertical. Connectors are mounted on inside/outside stainless steel plates and attached to a 4 ft. long, 3 1/2" high, 3/4" thick pressure-treated wood panel.

Real Western Red Cedar wood is naturally resistant to rot, decay and insects -- lasts longer, maintenance free. Pitch and resin free for a wide range of beautiful finishes or leave it in its naturally beautiful raw finish. Edges sealed by weather-stripping. Seals and insulates against all weather conditions. Includes window locking rod.

Inside/outside stainless steel plates ground all coax shields. Stainless steel ground post brings ground in.



MFJ-4603
\$129.95

MFJ-4603 Universal Window Feedthrough Panel

Four 50 Ohm *Teflon*[®] SO-239 coax connectors let you feed HF/VHF/UHF antennas at full legal power limit.

A 50 Ohm *Teflon*[®] coax N-connector lets you use any antenna up to 11 GHz including 450 MHz, UHF, satellite, moon bounce and 2.4/5.8 GHz Wi-Fi antennas.

A 75 Ohm, 1 GHz F-connector makes it easy to bring in television, satellite, HFD cable TV and FM radio signals.


A pair of high-voltage ceramic feedthrough insulators lets you bring in 450/300 Ohm balanced lines directly to your antenna tuner.

Has random/longwire antenna ceramic feedthrough insulator.

5-way binding posts let you supply 50 Volts/15 Amps DC/AC power to your outside antenna tuners/relays/switches.

Stainless ground post brings in ground connection, bonds inside/outside stainless steel panels together and drains away static charges.

MFJ's exclusive *Adaptive Cable Feedthru*[™] lets you bring in rotator/antenna switch cable, etc. without removing connectors (up to 1 1/4 x 1 5/8 in.) Adapts to virtually any cable size. Seals out rain, snow, adverse weather.



3 Coax, Balanced Line, Random Wire

Best Seller! 3 *Teflon*[®] coax connectors for HF/VHF/UHF antennas. Separate high voltage ceramic feed-thru insulators for balanced lines and long wire/random wire. Stainless steel ground post.



MFJ-4601
\$89.95

6 Coax

6 high quality *Teflon*[®] coax connectors for HF/VHF/UHF antennas. Stainless steel ground post. Full 1500 Watts.



MFJ-4602
\$104.95

4 Balanced Line, 2 Coax

4 pairs of high-voltage ceramic feed-thru insulators for balanced lines and 2 coax connectors.



MFJ-4600
\$124.95

5 Cables, any-size

5 Adaptive Cable Feedthrus[™]. Pass any cable with connector: 2 cables with large connectors up to 1 1/4 x 1 5/8 inches and 3 cables with UHF/N size coax connectors. Seals out weather.



MFJ-4604
\$134.95


All-Purpose FeedThru/CableThru[™]

Stacks MFJ-4603 and MFJ-4604! Gives you every possible cable connection you'll ever need through your window without drilling holes in wall -- including UHF, N and F coax connectors, balanced lines, random wire, ground, DC/AC power and cables of any size for rotators, antenna switches, etc.



MFJ-4605
\$199.95

Bring cables thru eave of your house



MFJ-4616 shown with vent (not included) it replaces. Six Holes
\$49⁹⁵



MFJ-4613 shown with vent (not included) it replaces. Three Holes
\$34⁹⁵



Replace standard house eave/soffit air vents with these **MFJ AdaptiveCable[™] Plates**.


Bring in coax, rotator, antenna switch, power cables, etc. of nearly any size up to 1 1/4 x 1 5/8".

Sliding plates, rubber grommets adjust for virtually any cable size to seal out adverse weather, insects and varmints. Use existing vent hole, mounting screws and screw holes.


MFJ AdaptiveCable[™] Wall Plates



MFJ-4614 (Four Holes)
\$79⁹⁵



6.95Wx6H"
MFJ-4612 (Two Holes)
\$49⁹⁵



3.25Wx6H"
MFJ-4611 (Single Hole)
\$34⁹⁵

MFJ's exclusive weather-sealed *AdaptiveCable[™] Wall Plates* let you bring nearly any cable -- rotator, antenna switch, coax, etc. -- through walls without removing connectors. Pass cable connectors up to 1 1/4 x 1 5/8". Slide plates adjust hole size to weather-seal virtually any cable. Rubber grommet seals out rain, snow, adverse weather. Kit includes 18 gauge *stainless steel* plates for wall side, sliding plates, rubber grommets, weather stripping and hardware. Models for one, two and four cables.



MFJ Enterprises, Inc. 300 Industrial Pk Rd, Starkville, MS 39759

Phone: (662) 323-5869 • **Tech Help:** (662) 323-0549 • **FAX:** (662) 323-6551 8-4:30 CST, Mon.-Fri.

Add shipping. Prices and specifications subject to change. (c) 2024 MFJ Enterprises, Inc.

• 1 Year No Matter What[™] warranty • 30 day money back guarantee (less s/h) on orders direct from MFJ





Honoring. Dedicating. Remembering.

The Diamond Terrace at ARRL



More than **3,000 bricks** have been placed in the Diamond Terrace outside ARRL Headquarters and W1AW in Newington, Connecticut. The beautiful patio is a place of permanent recognition, made possible by the generous contributions of annual Diamond Club donors and friends of ARRL. **The engraved bricks include names, call signs, and special messages for members who have shown their support for ARRL.**

Individuals and radio clubs contributing \$250 or more to the ARRL Diamond Club may choose to inscribe a brick with their own call sign, or place a tribute to a friend or family member, mentor, or Silent Key.

Make a gift online to place your brick
www.arrl.org/diamond-terrace

For more information on placing a brick in the Diamond Terrace, please contact the ARRL Development Office at development@arrl.org or **860-594-0228**.

www.arrl.org/diamond-terrace | tel. 860-594-0228

ARRL, 225 Main Street, Newington CT 06111-1400 USA



The EVENT HORIZON OF DX TS-990S

Dual TFT Display & Dual Receiver HF/50 MHz Transceiver



The main receiver has an IP3 in the +40 dB class, and the sub-receiver is the already famous TS-590S receiver. Capable of receiving two signals at once, on different bands. 7-inch and 3.5-inch color TFT displays allow displaying of independent contents. Simplification of complex operations at a glance. Make no mistake, this is not a toy. Finally a serious tool is available for getting the very most from your hobby - of course it's a Kenwood.

- Covers the HF and 50 MHz bands.
- High-speed automatic antenna tuner.
- USB, Serial and LAN ports.
- Various PC applications (free software): ARCP-990 enabling PC control, ARHP-990 enabling remote control, and ARUA-10 USB audio driver.
- Clean 5 to 200 W transmit power through the 50 V FET final unit.
- Built-in RTTY and PSK.
- Three Analog Devices 32-bit floating-point arithmetic DSPs.
- DVI output for display by an external monitor (main screen display only).

KENWOOD

Customer Support: (310) 639-4200
Fax: (310) 537-8235


www.kenwood.com/usa



ADS02424